




Specifications

Wafer



備注 (Remark)

- 1. 材料 (Material)
膠芯: LCP UL94V-0
Housing: LCP UL94V-0
端子: 黃銅
Contact: Brass



1511WWS-XXXX-LPSW

1511WWS-XXXX-LPSW



SECTION: A-A
SCALE: 1:1


Poles	Dimensions (mm)		
	A	B	C
02	1.50	4.30	1.70
03	3.00	5.80	3.20
04	4.50	7.30	4.70
05	6.00	8.80	6.20
06	7.50	10.30	7.70
07	9.00	11.80	9.20
08	10.50	13.30	10.70
09	12.00	14.80	12.20
10	13.50	16.30	13.70
11	15.00	17.80	15.20
12	16.50	19.30	16.70
13	18.00	20.80	18.20
14	19.50	22.30	19.70
15	21.00	23.80	21.20

1511WWS-XXHF-LPSW	LCP UL 94V-0 Halogen Free	Brass	Tin Plating Fog	1511H
1511WWS-XX-LPSW	LCP UL 94V-0			
PART NO	Material	Material (Pin)	Finish (Pin)	Mates With SWB Housing




Housing

備注 (Remark)

- 1. 材料 (Material)
膠芯: PA66 UL94V-0
Housing: PA66 UL94V-0



1511H-XX-N0



SECTION: A-A
SCALE: 1:1

Poles	Dimensions (mm)		
	A	B	C
02	1.50	3.70	4.10
03	3.00	5.20	5.60
04	4.50	6.70	7.10
05	6.00	8.20	8.60
06	7.50	9.70	10.10
07	9.00	11.20	11.60
08	10.50	12.70	13.10
09	12.00	14.20	14.60
10	13.50	15.70	16.10
11	15.00	17.20	17.60
12	16.50	18.70	19.10
13	18.00	20.20	20.60
14	19.50	21.70	22.10
15	21.00	23.20	23.60

1511H-XX-N0HF	Nylon 66 UL 94V-0 Halogen Free	1511T	1511W	1,000Pcs
1511H-XX-N0	Nylon 66 UL 94V-0			
PART NO	Material	Suitable SWB Terminal	Mates With SWB Wafer	Q'ty/Bag



1511H-XX-N0

W



WAFER

Terminal

備注 (Remark)

- 1. 材料 (Material)
端子: 磷青銅
Contact: Phosphor bronze


1511T-PSN

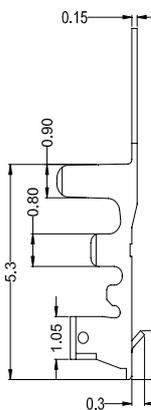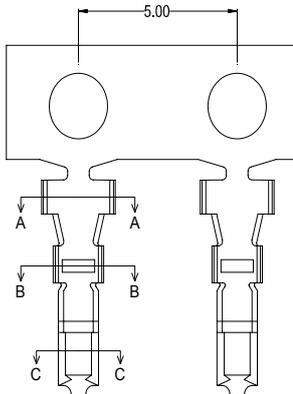

SECTION: A-A
SCALE: 1:1



SECTION: B-B
SCALE: 1:1



SECTION: C-C
SCALE: 1:1



1511T-PSN

1511T-PSNB	Phosphor Bronze	AWG#24-28	1.10mm(Max)	Plating Before Stamping: 10~30u" Ni; 40~60u" Sn	1511H	10,000Pcs
1511T-PSN	Phosphor Bronze			Stamping Before plating: 30~50u" Ni; 70~120u" Sn		
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used In SWB Housing	Q'ty/Reel