

Specifications



Housing

備注 (Remark)

1. 材料 (Material)

膠芯: PA66/PBT UL94V-0

Housing: PA66/PBT UL94V-0

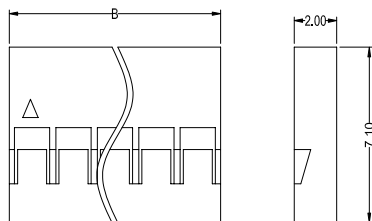

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	2.00	4.35	12	22.00	24.35
03	4.00	6.35	13	24.00	26.35
04	6.00	8.35	14	26.00	28.35
05	8.00	10.35	15	28.00	30.35
06	10.00	12.35	16	30.00	32.35
07	12.00	14.35	17	32.00	34.35
08	14.00	16.35	18	34.00	36.35
09	16.00	18.35	19	36.00	38.35
10	18.00	20.35	20	38.00	40.35
11	20.00	22.35			

4601H-XX-N0HF	PA66 UL 94V-0 Halogen Free	4601T	4601W	1,000Pcs
4601H-XX-PT	PBT UL 94V-0			
PART NO	Material	Suitable SWB Terminal	Mates With SWB Pin Header Or Box Header	Q'ty/Bag



4601H-XX-PT

4601H-XX-PT



Housing

備注 (Remark)

1. 材料 (Material)

膠芯: PA66 UL94V-0

Housing: PA66 UL94V-0

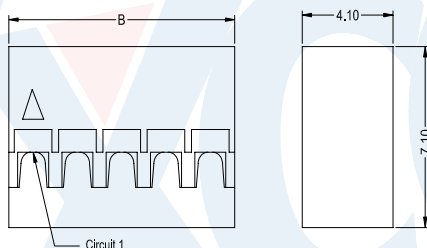

4601H-2*XXA-N0HF	Nylon 66 UL 94V-0 Halogen Free	4601T	4601W	1,000Pcs
4601H-2*XXA-N0	Nylon 66 UL 94V-0			
PART NO	Material	Suitable SWB Terminal	Mates With SWB Pin Header Or Box Header	Q'ty/Bag

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
4	2.00	4.50	34	32.00	34.50
6	4.00	6.50	36	34.00	36.50
8	6.00	8.50	38	36.00	38.50
10	8.00	10.50	40	38.00	40.50
12	10.00	12.50	42	40.00	42.50
14	12.00	14.50	44	42.00	44.50
16	14.00	16.50	46	44.00	46.50
18	16.00	18.50	48	46.00	48.50
20	18.00	20.50	50	48.00	50.50
22	20.00	22.50	52	50.00	52.50
24	22.00	24.50	54	52.00	54.50
26	24.00	26.50	56	54.00	56.50
28	26.00	28.50	58	56.00	58.50
30	28.00	30.50	60	58.00	60.50
32	30.00	32.50			



4601H-2*XXA-N0

4601H-2*XXA-N0

W

WAFER


Terminal

備注 (Remark)

1. 材料 (Material)

端子: 磷青铜/黄铜

Contact: Phosphor bronze/Brass

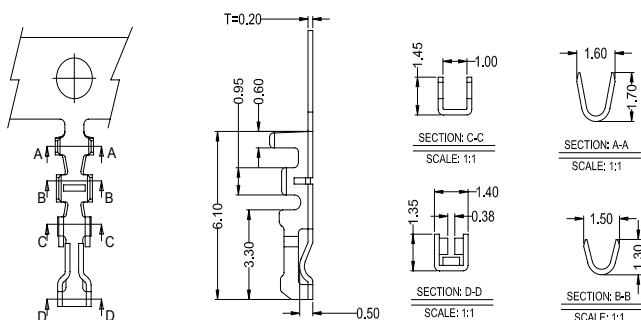

4601T-XXX-A

4601T-XXX-A

4601T-PV01-A	Phosphor Bronze	AWG#26-30	1.40mm(Max)	Stamping Before Pating: 30~50u" Ni; Contact Area Gold: Gold Flash	4601H	10,000Pcs
4601T-PG01-A	Phosphor Bronze	AWG#26-30	1.40mm(Max)	Stamping Before Pating: 30~50u" Ni; Contact Area Gold: Gold Flash		
4601T-PSN-A	Phosphor Bronze	AWG#26-30	1.40mm(Max)	Stamping Before Pating: 30~50u" Ni; 70~120u" Sn		
4601T-BG01-A	Brass	AWG#26-30	1.40mm(Max)	Stamping Before Pating: 30~50u" Ni; Contact Area Gold: Gold Flash		
4601T-BSN-A	Brass	AWG#26-30	1.40mm(Max)	Stamping Before Pating: 30~50u" Ni; 70~120u" Sn		
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used In SWB Housing	Q'ty/Reel