

Specifications

Wafer

備注 (Remark)

1. 材料 (Material)


膠芯: PBT UL94V-0

Housing: PBT UL94V-0


端子: 黃銅

Contact: Brass

2530WR-2*XX-PTSN



2530WR-2*XX-PTSN



2530WR-XXS-PTSN	PBT UL94V-0	Brass	Tin-Plated	2530H	1,000Pcs
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With SWB Housing	Q' ty/Bag

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2	2.54	7.70	12	27.94	33.10
3	5.08	10.20	13	30.48	35.60
4	7.62	12.70	14	33.02	38.10
5	10.16	15.20	15	35.56	40.70
6	12.70	17.80	16	38.10	43.20
7	15.24	20.30	17	40.64	45.70
8	17.78	22.90	18	43.18	48.20
9	20.32	25.40	19	45.72	50.70
10	22.86	28.00	20	48.26	53.20
11	25.40	30.50	22	53.34	58.50

Wafer

備注 (Remark)

1. 材料 (Material)


膠芯: PBT UL94V-0

Housing: PBT UL94V-0


端子: 黃銅

Contact: Brass

2530WR-XX-PTSN

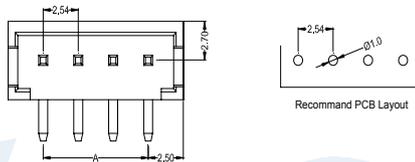

2530WR-XX-PTSN

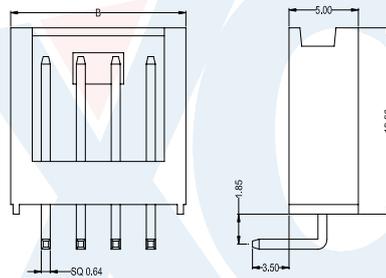

2530WR-XXS-PTSN	PBT UL94V-0	Brass	Tin-Plated	2530H	1,000Pcs
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With SWB Housing	Q' ty/Bag

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2	2.54	7.70	12	27.94	33.10
3	5.08	10.20	13	30.48	35.60
4	7.62	12.70	14	33.02	38.10
5	10.16	15.20	15	35.56	40.70
6	12.70	17.80	16	38.10	43.20
7	15.24	20.30	17	40.64	45.70
8	17.78	22.90	18	43.18	48.20
9	20.32	25.40	19	45.72	50.70
10	22.86	28.00	20	48.26	53.20
11	25.40	30.50	22	53.34	58.50

W

WAFER

Terminal


備注 (Remark)

1. 材料 (Material)

端子: 磷青銅/黃銅

Contact: Phosphor bronze/Brass

2530TM-XSN

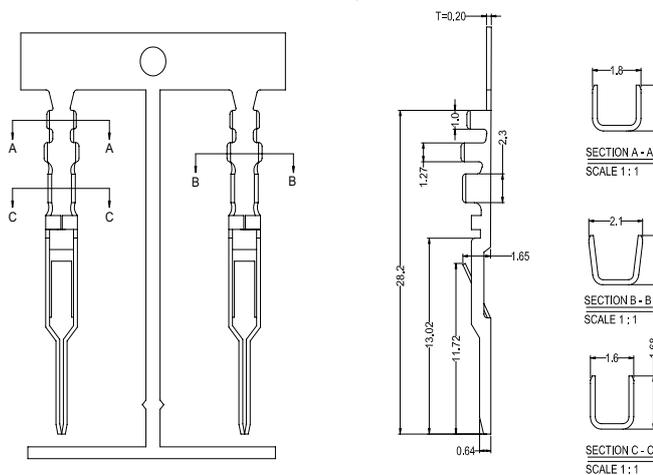

2530TM-XSN

2530TM-BSN	Brass	AWG#22-26	1.5mm(Max)	Stamping Before Plating;30-50u" Ni;70-120u"Sn	2530H	15,000Pcs
2530TM-PSN	Phosphor Bronze					
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used In SWB Housing	Q' ty/Reel