

Specifications

WAFER

備注 (Remark)

1. 材料 (Material)


膠芯: PA66 UL94V-0,

Housing: PA66 UL94V-0

端子: 黃銅

Contact: Brass

8672WV-XX-N2SN-K2

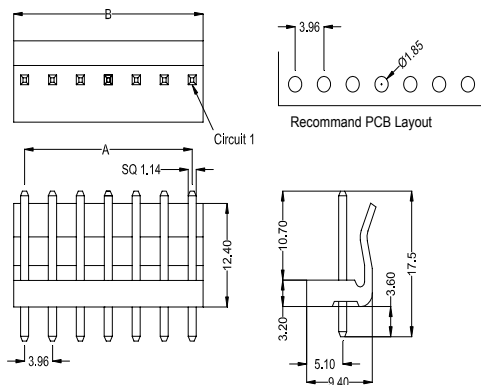

8672WV-XX-N2SN-K2

8672WV-XX-N2V01-K2	Nylon 66 UL 94V-2	Brass	Gold-Flash	8672H	1,000Pcs
8672WV-XX-N2SN-K2			Tin-Plated		
PART NO	Material	Material(Pln)	Finish(Pln)	Mates With SWB Housing	Q'ty/Bag

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2	3.96	7.92	12	43.56	47.52
3	7.92	11.88	13	47.52	51.48
4	11.88	15.84	14	51.48	55.44
5	15.84	19.80	15	55.44	59.40
6	19.80	23.76	16	59.40	63.36
7	23.76	27.72	17	63.36	67.32
8	27.72	31.68	18	67.32	71.28
9	31.68	35.64	19	71.28	75.24
10	35.64	39.60	20	75.24	79.20
11	39.60	43.56			

Housing


備注 (Remark)

1. 材料 (Material)

膠芯: PA66 UL94V-2

Housing: PA66 UL94V-2

8672H-XX-N2

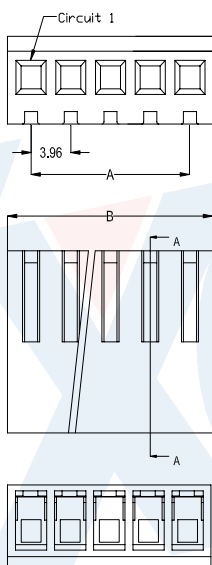

8672H-XX-N2

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2	3.96	8.62	12	43.56	48.23
3	7.92	12.59	13	47.52	52.19
4	11.88	16.55	14	51.48	56.15
5	15.84	20.51	15	55.44	60.11
6	19.80	24.47	16	59.40	64.07
7	23.76	28.43	17	63.36	68.03
8	27.72	32.39	18	67.32	71.79
9	31.68	36.35	19	71.28	75.95
10	35.64	40.31	20	75.24	79.91
11	39.60	44.27			

8672H-XX-N2	Nylon 66 UL 94V-2	8672T	8672W	1,000Pcs
PART NO	Material	Suitable SWB Terminal	Mates With SWB Wafer	Q'ty/Bag

Terminal


備注 (Remark)

1. 材料 (Material)


端子: 黃銅/磷青銅

Contact: Brass/Phosphor Bronze

8672T-XSN

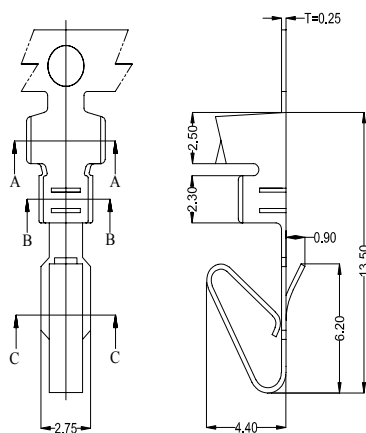

8672T-XSN

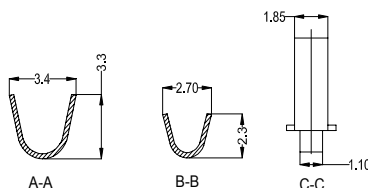

8672T-BSN	Brass	AWG#18-24	2.80mm(Max)	Stamping Before Plating: 30~50u" Ni; 70~120u" Sn	8672H	10,000Pcs
8672T-PSN	Phosphor Bronze					
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used In SWB Housing	Q'ty/Reel