

## Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PBT+25%G. F UL94V-0

Housing: PBT+25%G. F UL94V-0

端子: 磷銅

Contact: Phosphor Brass

2. 特性 (characteristics):

額定電流: 1.00AMP

Rating Current: 1.00AMP

接觸阻抗: 30mΩ Max

Contact Resistance: 30mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ MIN

耐電壓: AC 500V

Withstanding Voltage: AC 500V/Minute

溫度範圍: -55° C to +85° C



Temperture Range: -55° C to +85° C



C254-XX67XXSC0XX1



C254-XX67XXRC0XX1

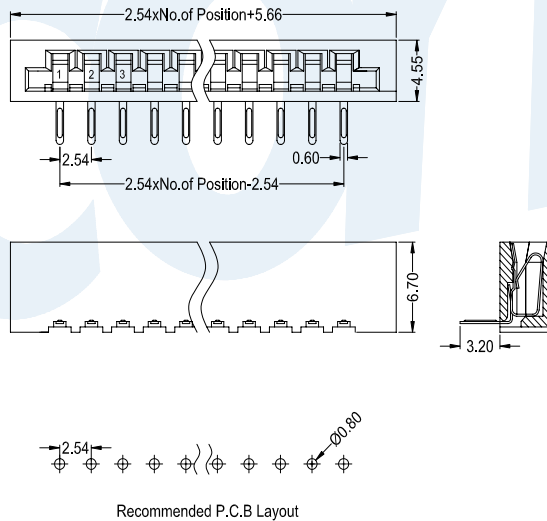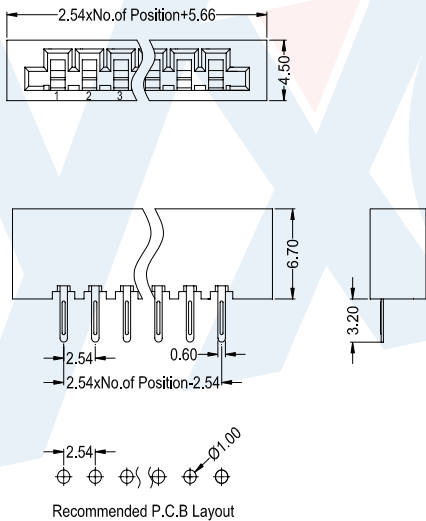

FPC CONNECTOR C

<b>C 2 5 4 - X X</b>	<b>6 7</b>	<b>X X</b>	<b>X</b>	<b>C</b>	<b>0</b>	<b>X</b>	<b>X</b>	<b>1</b>
<b>No.Of Pins Per Row</b> 03~22P	<b>Contact Plating</b> Full Of Gold A0=0.8u" Semi-Gold B0=0.8U" A9=30u" B9=30U" S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature	<b>Contact Shape:</b> S: Straight R: Right Angle	<b>Colour</b> W: White P: Beige B: Black	<b>Packing</b> A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray				