

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.





温度范围: -40° C to +105° C

Temperture Range: -40° C to +105° C

Ordering Information

P2XX-22 XX XX X M XXX X 2

HEIGHT OF HOUSING PER ROW Full of Gold Semi-gold Contact Plating INSULATOR MATERIAL OF LENGTH PACKING
10: 1.0mm 2~40P A0=0.8u" B0=0.8U" B: PA6T A: PE Bag
15: 1.5mm A1=1u" B1=1U" C: PA6T B: Tape & Reel
20: 2.0mm A2=1.5u" B2=1.5U" D: LCP C: Tube
A3=2u" B3=2U" D: Tube+CAP E: Tray
A4=3u" B4=3U"
A5=5u" B5=5U"
A6=10u" B6=10U"
A7=15u" B7=15U"
A8=20u" B8=20U"
A9=30u" B9=30U"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

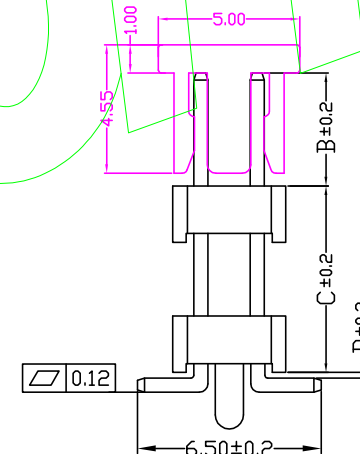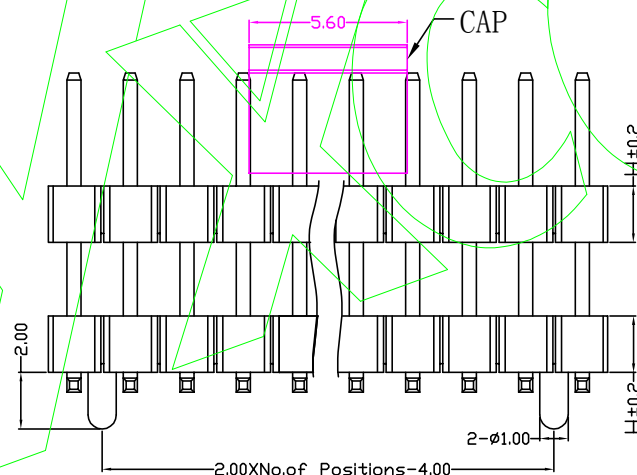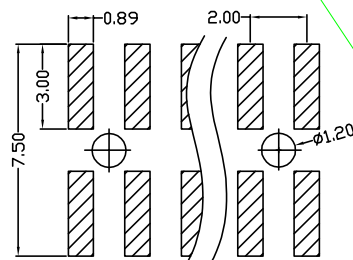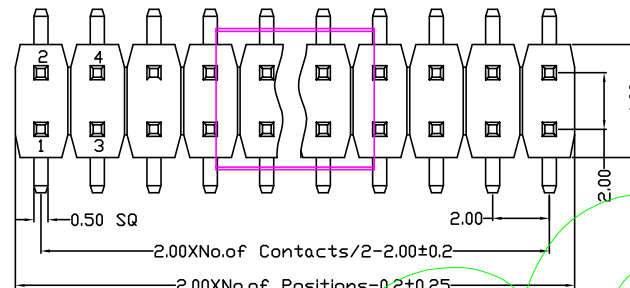

Dimension antitheses list							
ITEM	B	H	D	C			
Standard	2.8	4.0	1.0	1.5	2.0	0	0.75
Alternate							

				OPERATION		SCALE		Fit		Yxcon 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.			
				X.X	±0.25	UNIT		MM					
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.6.16	PART NO	P2XX-22XXXXMXXXX2		
				X.XXX	±0.10								
				Angle	±3°	SHEET	1/1	CHECK		TITLE	2.0间距 双排针 双塑 SMT 带柱		
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.			