


Ordering Information

Temperture Range: -40° C to+105° C



				OPERATION		SCALE		Fit		YXCON 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.6.18	PART NO	P125-13XXXXXXRX1
				X.XXX	±0.10						
				Angle	±3°	SHEET	1/1	CHECK		TITLE	2.54间距 塑高2.5 三排针 单塑 90度
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.	

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.

温度范围: -40° C to +105° C


Temperture Range: -40° C to +105° C

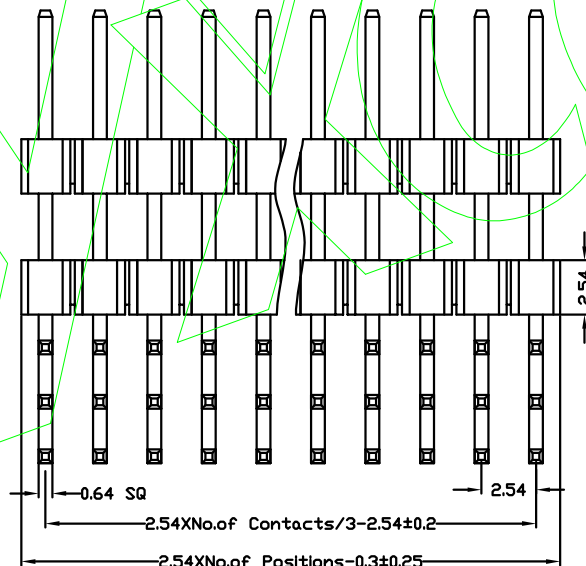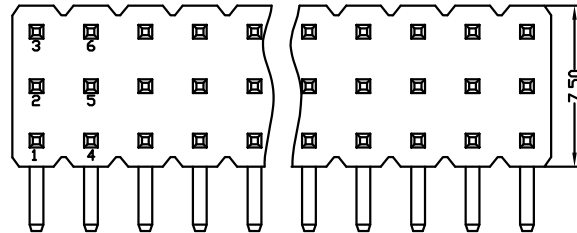

Ordering Information

P125-23 XX XX X R XXX X 1

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Full of Gold	Plating Semi-gold	INSULATOR MATERIAL	LENGTH OF TERMINAL	PACKING
25: 2.54mm	3-40P	A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"	A: PBT B: PA6T C: PA9T D: LCP	TERMINAL	A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray

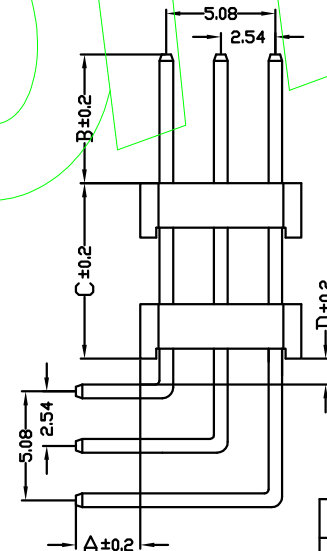

Dimension antitheses list				
ITEM	A	B	D	C
Standard	3.0	6.0	0.6	1.2
Alternate				

				OPERATION	SCALE	Fit	Yxcon 东莞市宇熙精密连接器有限公司			
				X.X	±0.25	UNIT	MM	www.yxcon.com	Dongguan Yuxi Electronic Co., Ltd.	
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.6.18	PART NO
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE
				Angle	±3°	PROJ.	1/1	APPROVE		2.54间距 塑高2.5 三排针 双塑 90度
				DIM	TOL					Customer No.
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION							