


P732-11 XX XX X R XXX X 1

30u" MIN NICKEL UNDERPLATING OVER ALL

Temperature Range: -40°C to $+105^{\circ}\text{C}$

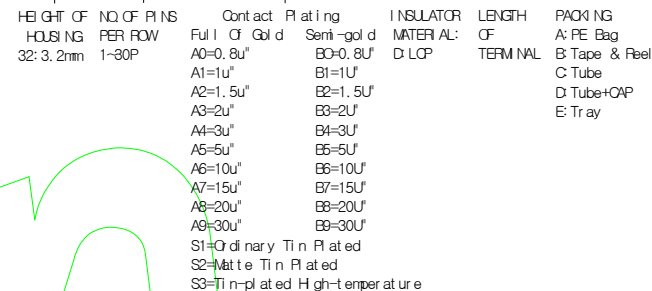

Dimension antitheses list				
ITEM	A	B	D	
Standard	3.5	8.0	0.60	2.0
Alternate				

				OPERATION		SCALE		Fit		 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM		www.yxcon.com		
				X.XX	±0.20	SIZE		A4	DESIGN		周芳杰 2021.6.19	PART NO
				X.XXX	±0.10	SHEET		1/1	CHECK			TITLE
				Angle	±3°	PROJ.			APPROVE			Customer No.
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION									

Specifications

1. 材料 (MATERIAL)

Housing:LCP+30%G. F UL94V-0, Color:Black

Contact: Brass, ORDINARY TIN PLATED

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):





Raring Current:8 AMP.

Contact Resistance: 20 mΩ MAX.

Insulating Resistance:1000 MΩ MIN.

Withstanding Voltage:AC 500V/Minute.

Temperture Range: -40° C to+105° C

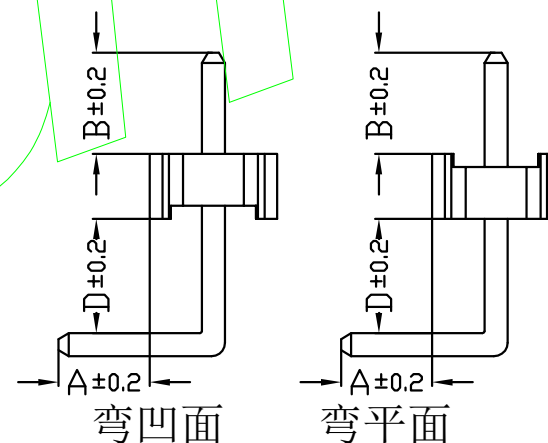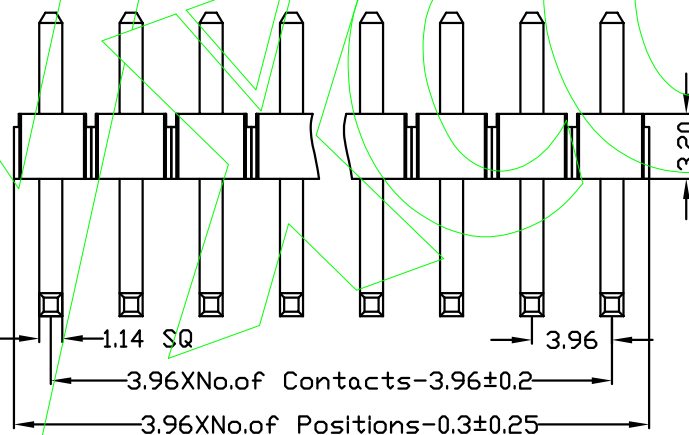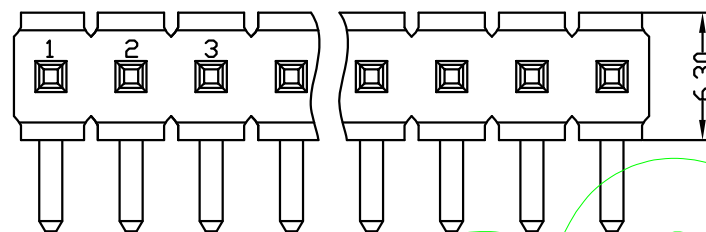

Ordering Information

P732-11 XX XX X R XXX X X

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Full or Gold	Plating Semi-gold	INSULATOR MATERIAL: D LCP	LENGTH OF TERMINAL	PACKAGING: A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
32: 3.2mm	1-30P	A0=0, 8u"	B0=0, 8U"			
		A1=1u"	B1=1U"			
		A2=1, 5u"	B2=1, 5U"			
		A3=2u"	B3=2U"			
		A4=3u"	B4=3U"			
		A5=5u"	B5=5U"			
		A6=10u"	B6=10U"			
		A7=15u"	B7=15U"			
		A8=20u"	B8=20U"			
		A9=30u"	B9=30U"			
		S1=Or dinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

Dimension antitheses list

ITEM	A	B	D	
Standard	3.5	8.0	0.60	2.0
Alternate				

				OPERATION		SCALE		Fit		 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.6.19	PART NO	P732-11XXXXXXXXXX	
				X.XXX	±0.10							
				Angle	±3°	SHEET	1/1	CHECK		TITLE	3.96间距 塑高3.2 单排针 单塑 90度	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.		