

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA6T+30%G.F UL94V-0, Color: Black
 端子: 磷铜, 镍底30u"MIN, 表面镀金1u"MIN
 Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL



2. 特性 (characteristics):

额定电流: 1 AMP
 Rating Current: 1 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V/分钟.
 Withstanding Voltage: AC 500V/Minute.
 温度范围: -40° C to +105° C
 Temperature Range: -40° C to +105° C

Ordering Information

F321-12 XX XX X MU X 3

NO. OF PINS PER ROW	Full of Gold	Contact Plating	INSULATOR MATERIAL	PACKING
2-50P	A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	C PA6T D LCP	A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature			

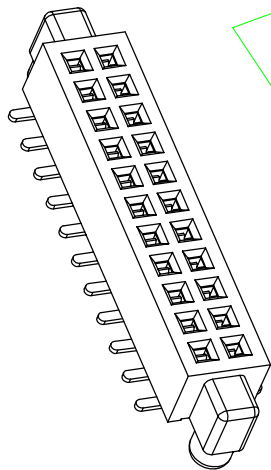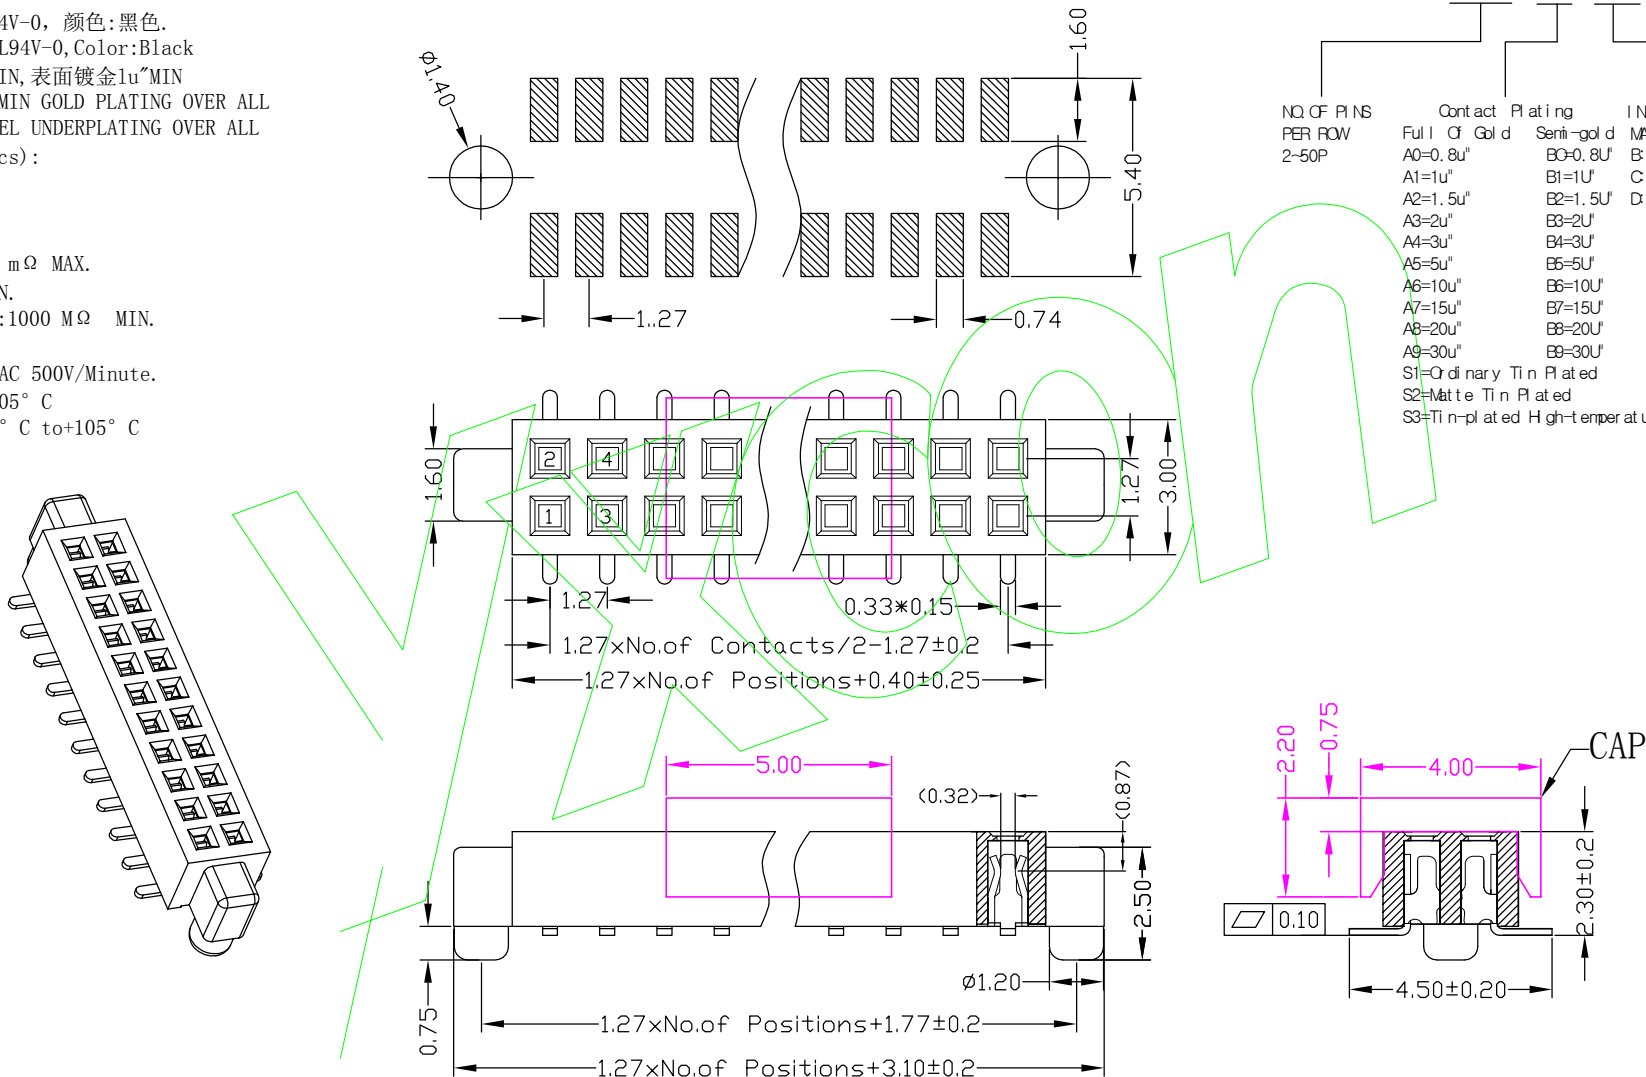

			OPERATION	SCALE	Fit	东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co., Ltd.			
			X.X ±0.25	UNIT	MM				
			X.XX ±0.20	SI ZE	A4	DESIGN	周芳杰 2021.6.21	PART NO.	F321-12XXXXXMUX3
			X.XXX ±0.10	SHEET	2/2	CHECK		TITLE:	1.27间距 塑高2.1 双排母 SMT U型 带外柱
			Angle ±3°	PRQJ.	APPROVE			Customer No.	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION						