

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.

温度范围: -40° C to +105° C


Temperture Range: -40° C to +105° C

Ordering Information

F343-12 XX XX X RU X 1

NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL	PACKING
2-50P	Full Gold	PA6T	PE Bag
	SeMI-gold	PA9T	Tape & Reel
		LCP	Tube
			Tube+CAP
			Tray

A0=0.8u" B0=0.8U
 A1=1u" B1=1U
 A2=1.5u" B2=1.5U
 A3=2u" B3=2U
 A4=3u" B4=3U
 A5=5u" B5=5U
 A6=10u" B6=10U
 A7=15u" B7=15U
 A8=20u" B8=20U
 A9=30u" B9=30U
 S1=Ordinary Tin Plated
 S2=Matte Tin Plated
 S3=Tin-plated High-temperature

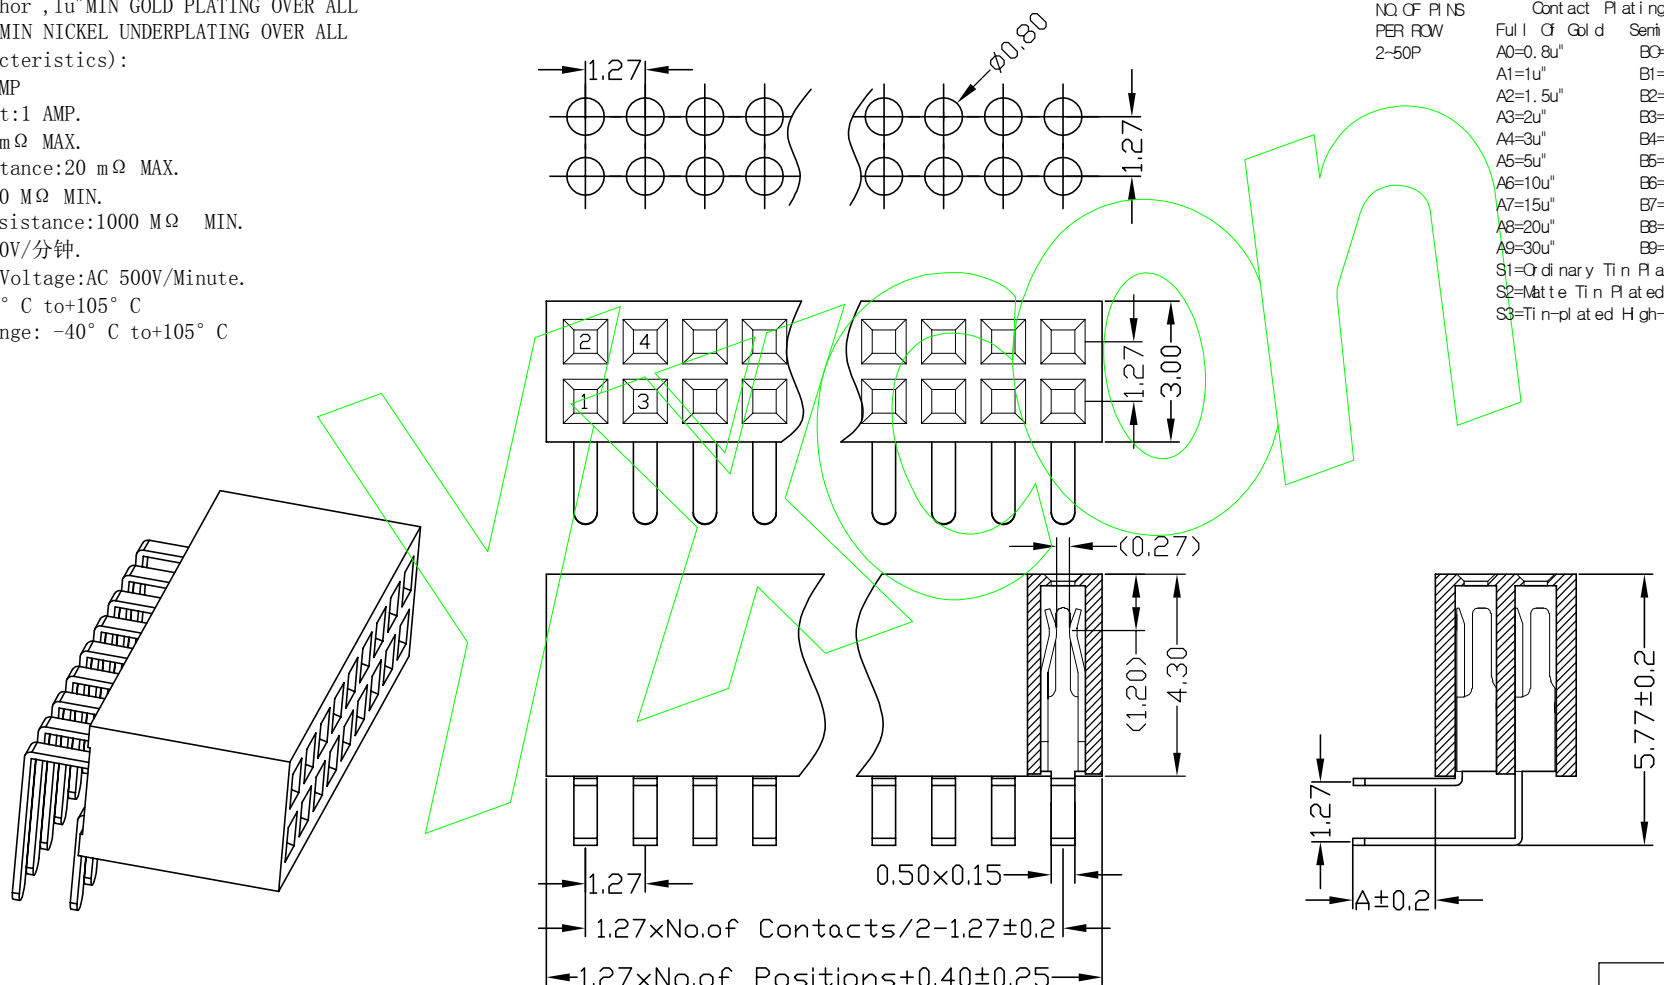

DIM "A"	1.7	2.0	2.4
---------	-----	-----	-----

REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	OPERATION	SCALE	Fit	东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co., Ltd.					
				X.X ±0.25	UNIT	MM	SI ZE	A4	DESIGN	刘伟 2020.12.03	PART NO	F343-12XXXXXRU1
				X.XX ±0.20	SHEET	1/1	CHECK				TITLE	1.27间距 塑高4.3 双排母 90度 U型
				X.XXX ±0.10	PROJ.		APPROVE				Customer No.	
				Angle ±3°								
				DIM TOL								