

Specifications

Ordering Information

备注(Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing:PA6T+30%G. F UL94V-0, Color:Black

端子: 磷铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor, 1u" MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current:1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 M Ω MIN.


Insulating Resistance:1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage:AC 500V/Minute.

温度范围: -40°C to $+105^{\circ}\text{C}$

Temperature Range: -40°C to $+105^{\circ}\text{C}$

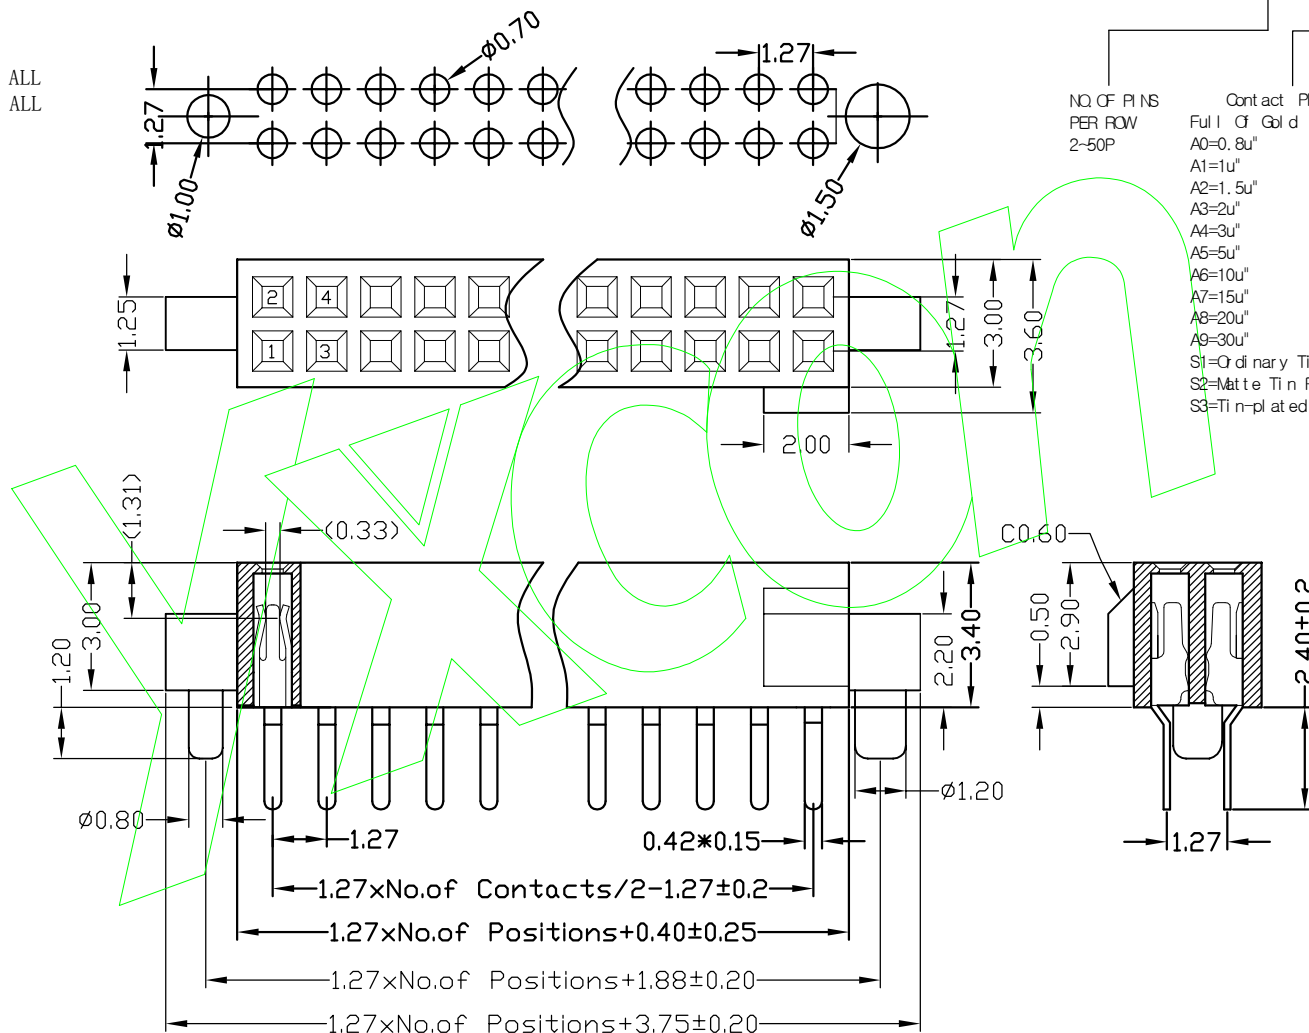

NO. OF PLM
PER ROW
2~50P

Cont
Ful I Of
A0=0.8u''

Plating
d Semi-gold
BG=0.8U

INSULATOR
MATERIAL:
B: PA6T

PACKING
A: PE Bag
B: Tape & Reel

$$\begin{aligned} A_1 &= 1u'' \\ A_2 &= 1.5u'' \\ A_3 &= 2u'' \\ A_4 &= 3u'' \\ A_5 &= 5u'' \\ A_6 &= 10u'' \\ A_7 &= 15u'' \\ A_8 &= 20u'' \\ A_9 &= 30u'' \end{aligned}$$

B1=1U'
B2=1.5U'
B3=2U'
B4=3U'
B5=5U'
B6=10U'
B7=15U'
B8=20U'
B9=30U'

C: PA9T
D: LQP

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

				OPERATION		SCALE		Fit	 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	刘伟 2020.12.03	PART NO	F334-12XXXXXSUX3
				X.XXX	±0.10						
				Angle	±3°	SHEET	1/1	CHECK		TITLE	1.27间距 塑高3.4 双排母 180度 U型 带大小外柱 带防呆块
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.	

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.

温度范围: -40° C to +105° C

Temperture Range: -40° C to +105° C

Ordering Information

F343-12 XX XX X SF X 2

NO. OF PINS
PER ROW
2-50P

Contact

Full of Gold

A0=0.8u"

A1=1u"

A2=1.5u"

A3=2u"

A4=3u"

A5=5u"

A6=10u"

A7=15u"

A8=20u"

A9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

Plating

Semi-gold

B0=0.8u"

B1=1u"

B2=1.5u"

B3=2u"

B4=3u"

B5=5u"

B6=10u"

B7=15u"

B8=20u"

B9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

S4=High-temperature Tin-plated

S5=High-temperature Tin-plated

S6=High-temperature Tin-plated

S7=High-temperature Tin-plated

S8=High-temperature Tin-plated

S9=High-temperature Tin-plated

S10=High-temperature Tin-plated

S11=High-temperature Tin-plated

S12=High-temperature Tin-plated

S13=High-temperature Tin-plated

S14=High-temperature Tin-plated

S15=High-temperature Tin-plated

S16=High-temperature Tin-plated

S17=High-temperature Tin-plated

S18=High-temperature Tin-plated

S19=High-temperature Tin-plated

S20=High-temperature Tin-plated

S21=High-temperature Tin-plated

S22=High-temperature Tin-plated

S23=High-temperature Tin-plated

S24=High-temperature Tin-plated

S25=High-temperature Tin-plated

S26=High-temperature Tin-plated

S27=High-temperature Tin-plated

S28=High-temperature Tin-plated

S29=High-temperature Tin-plated

S30=High-temperature Tin-plated

S31=High-temperature Tin-plated

S32=High-temperature Tin-plated

S33=High-temperature Tin-plated

S34=High-temperature Tin-plated

S35=High-temperature Tin-plated

S36=High-temperature Tin-plated

S37=High-temperature Tin-plated

S38=High-temperature Tin-plated

S39=High-temperature Tin-plated

S40=High-temperature Tin-plated

S41=High-temperature Tin-plated

S42=High-temperature Tin-plated

S43=High-temperature Tin-plated

S44=High-temperature Tin-plated

S45=High-temperature Tin-plated

S46=High-temperature Tin-plated

S47=High-temperature Tin-plated

S48=High-temperature Tin-plated

S49=High-temperature Tin-plated

S50=High-temperature Tin-plated

S51=High-temperature Tin-plated

S52=High-temperature Tin-plated

S53=High-temperature Tin-plated

S54=High-temperature Tin-plated

S55=High-temperature Tin-plated

S56=High-temperature Tin-plated

S57=High-temperature Tin-plated

S58=High-temperature Tin-plated

S59=High-temperature Tin-plated

S60=High-temperature Tin-plated

S61=High-temperature Tin-plated

S62=High-temperature Tin-plated

S63=High-temperature Tin-plated

S64=High-temperature Tin-plated

S65=High-temperature Tin-plated

S66=High-temperature Tin-plated

S67=High-temperature Tin-plated

S68=High-temperature Tin-plated

S69=High-temperature Tin-plated

S70=High-temperature Tin-plated

S71=High-temperature Tin-plated

S72=High-temperature Tin-plated

S73=High-temperature Tin-plated

S74=High-temperature Tin-plated

S75=High-temperature Tin-plated

S76=High-temperature Tin-plated

S77=High-temperature Tin-plated

S78=High-temperature Tin-plated

S79=High-temperature Tin-plated

S80=High-temperature Tin-plated

S81=High-temperature Tin-plated

S82=High-temperature Tin-plated

S83=High-temperature Tin-plated

S84=High-temperature Tin-plated

S85=High-temperature Tin-plated

S86=High-temperature Tin-plated

S87=High-temperature Tin-plated

S88=High-temperature Tin-plated

S89=High-temperature Tin-plated

S90=High-temperature Tin-plated

S91=High-temperature Tin-plated

S92=High-temperature Tin-plated

S93=High-temperature Tin-plated

S94=High-temperature Tin-plated

S95=High-temperature Tin-plated

S96=High-temperature Tin-plated

S97=High-temperature Tin-plated

S98=High-temperature Tin-plated

S99=High-temperature Tin-plated

S100=High-temperature Tin-plated

S101=High-temperature Tin-plated

S102=High-temperature Tin-plated

S103=High-temperature Tin-plated

S104=High-temperature Tin-plated

S105=High-temperature Tin-plated

S106=High-temperature Tin-plated

S107=High-temperature Tin-plated

S108=High-temperature Tin-plated

S109=High-temperature Tin-plated

S110=High-temperature Tin-plated

S111=High-temperature Tin-plated

S112=High-temperature Tin-plated

S113=High-temperature Tin-plated

S114=High-temperature Tin-plated

S115=High-temperature Tin-plated

S116=High-temperature Tin-plated

S117=High-temperature Tin-plated

S118=High-temperature Tin-plated

S119=High-temperature Tin-plated

S120=High-temperature Tin-plated

S121=High-temperature Tin-plated

S122=High-temperature Tin-plated

S123=High-temperature Tin-plated

S124=High-temperature Tin-plated

S125=High-temperature Tin-plated

S126=High-temperature Tin-plated

S127=High-temperature Tin-plated

S128=High-temperature Tin-plated

S129=High-temperature Tin-plated

S130=High-temperature Tin-plated

S131=High-temperature Tin-plated

S132=High-temperature Tin-plated

S133=High-temperature Tin-plated

S134=High-temperature Tin-plated

S135=High-temperature Tin-plated

S136=High-temperature Tin-plated

S137=High-temperature Tin-plated

S138=High-temperature Tin-plated

S139=High-temperature Tin-plated

S140=High-temperature Tin-plated

S141=High-temperature Tin-plated

S142=High-temperature Tin-plated

S143=High-temperature Tin-plated

S144=High-temperature Tin-plated

S145=High-temperature Tin-plated

S146=High-temperature Tin-plated

S147=High-temperature Tin-plated

S148=High-temperature Tin-plated

S149=High-temperature Tin-plated

S150=High-temperature Tin-plated

S151=High-temperature Tin-plated

S152=High-temperature Tin-plated

S153=High-temperature Tin-plated

S154=High-temperature Tin-plated

S155=High-temperature Tin-plated

S156=High-temperature Tin-plated

S157=High-temperature Tin-plated

S158=High-temperature Tin-plated

S159=High-temperature Tin-plated

S160=High-temperature Tin-plated

S161=High-temperature Tin-plated

S162=High-temperature Tin-plated

S163=High-temperature Tin-plated

S164=High-temperature Tin-plated

S165=High-temperature Tin-plated

S166=High-temperature Tin-plated

S167=High-temperature Tin-plated

S168=High-temperature Tin-plated

S169=High-temperature Tin-plated

S170=High-temperature Tin-plated

S171=High-temperature Tin-plated

S172=High-temperature Tin-plated

S173=High-temperature Tin-plated

S174=High-temperature Tin-plated

S175=High-temperature Tin-plated

S176=High-temperature Tin-plated

S177=High-temperature Tin-plated

S178=High-temperature Tin-plated

S179=High-temperature Tin-plated

S180=High-temperature Tin-plated

S181=High-temperature Tin-plated

S182=High-temperature Tin-plated

S183=High-temperature Tin-plated

S184=High-temperature Tin-plated

S185=High-temperature Tin-plated

S186=High-temperature Tin-plated

S187=High-temperature Tin-plated

S188=High-temperature Tin-plated

S189=High-temperature Tin-plated

S190=High-temperature Tin-plated

S191=High-temperature Tin-plated

S192=High-temperature Tin-plated

S193=High-temperature Tin-plated

S194=High-temperature Tin-plated

S195=High-temperature Tin-plated

S196=High-temperature Tin-plated

S197=High-temperature Tin-plated

S198=High-temperature Tin-plated

S199=High-temperature Tin-plated

S200=High-temperature Tin-plated

S201=High-temperature Tin-plated

S202=High-temperature Tin-plated

S203=High-temperature Tin-plated

S204=High-temperature Tin-plated

S205=High-temperature Tin-plated

S206=High-temperature Tin-plated

S207=High-temperature Tin-plated

S208=High-temperature Tin-plated

S209=High-temperature Tin-plated

S210=High-temperature Tin-plated

S211=High-temperature Tin-plated

S212=High-temperature Tin-plated

S213=High-temperature Tin-plated

S214=High-temperature Tin-plated

S215=High-temperature Tin-plated

S216=High-temperature Tin-plated

S217=High-temperature Tin-plated

S218=High-temperature Tin-plated

S219=High-temperature Tin-plated

S220=High-temperature Tin-plated

S221=High-temperature Tin-plated

S222=High-temperature Tin-plated

S223=High-temperature Tin-plated

S224=High-temperature Tin-plated

S225=High-temperature Tin-plated

S226=High-temperature Tin-plated

S227=High-temperature Tin-plated

S228=High-temperature Tin-plated

S229=High-temperature Tin-plated

S230=High-temperature Tin-plated

S231=High-temperature Tin-plated

S232=High-temperature Tin-plated

S233=High-temperature Tin-plated

S234=High-temperature Tin-plated

S235=High-temperature Tin-plated

S236=High-temperature Tin-plated

S

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.

温度范围: -40° C to +105° C

Temperture Range: -40° C to +105° C

Ordering Information

F343-12 XX XX X SU X 4

NO. OF PINS
PER ROW
2-50P

Contact
Full of Gold

Plating
Semi-gold

INSULATOR
MATERIAL:


PACKING
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"

B0=0.8u"
B1=1u"
B2=1.5u"
B3=2u"
B4=3u"
B5=5u"
B6=10u"
B7=15u"
B8=20u"
B9=30u"

C: PA6T
D: LCP

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

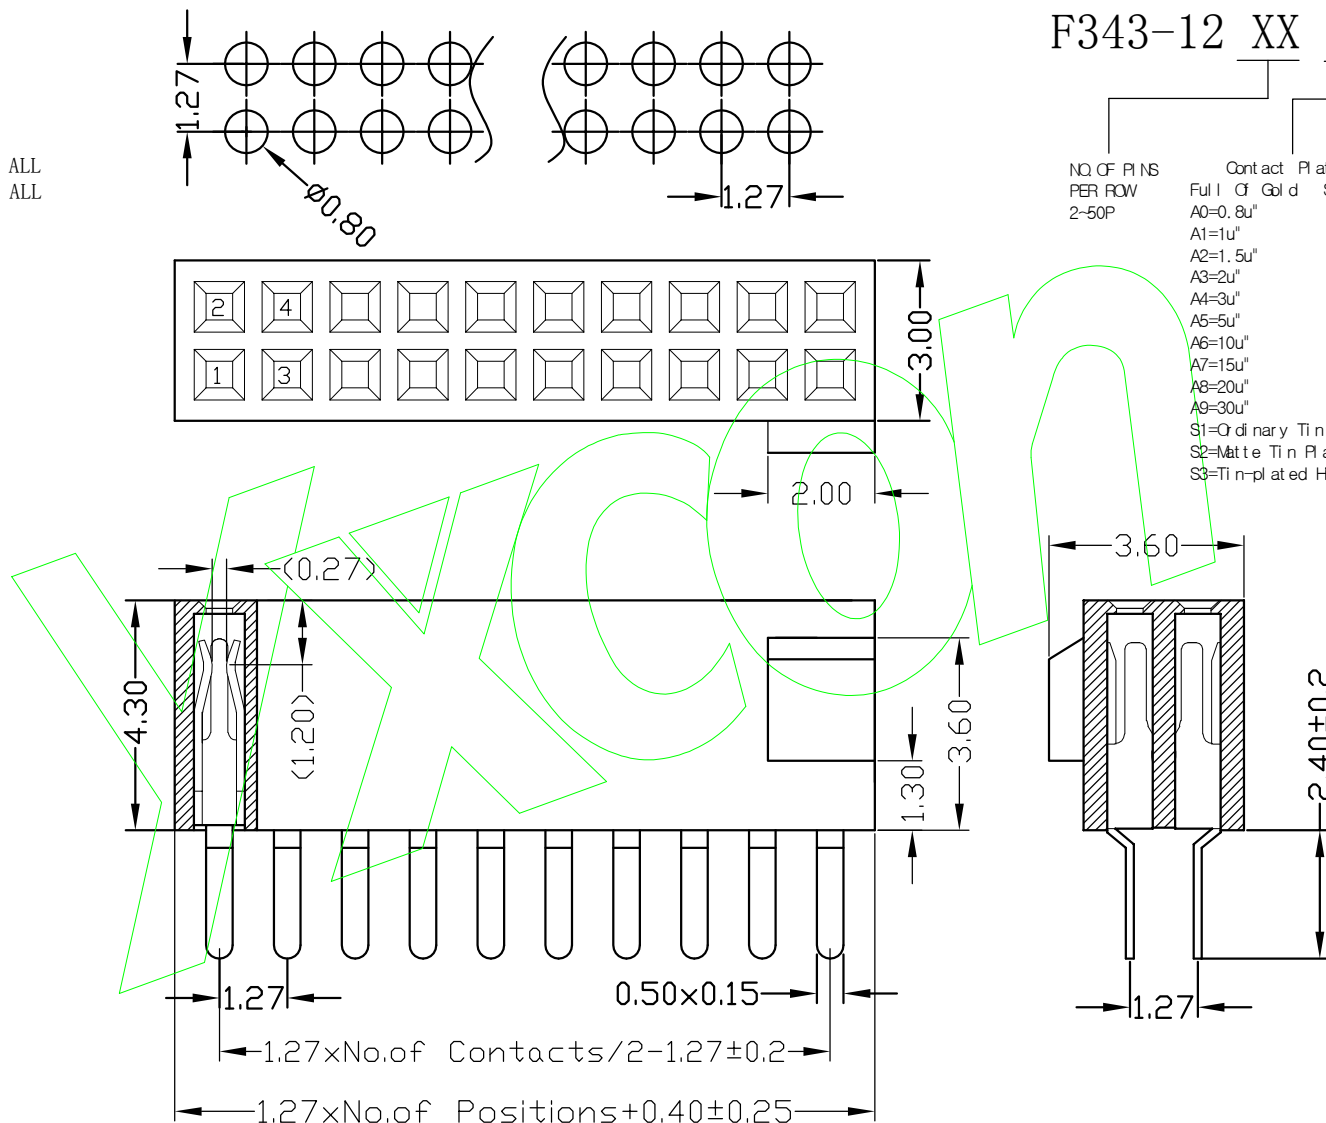

				OPERATION		SCALE		Fit		 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.							
				X.X	±0.25	UNIT		MM									
				X.XX	±0.20	SIZE		A4		DESIGN		刘伟 2020.12.03		PART NO		F343-12XXXXXSUX4	
				X.XXX	±0.10												
				Angle	±3°	SHEET		1/1		CHECK				TITLE		1.27间距 塑高4.3 双排母 180度 U型	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.				APPROVE				Customer No.			