


Ordering Information

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN
Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

耐电压: AC 500V/分钟.

Temperture Range: -40° C to+105° C

NQ OF PINS	CONTACT PLATING	INSULATOR	PACKING
PER ROW	Full Contact	Semi-gold	MATERIAL:
2-40P	A0=0.8u"	B0=0.8u"	A: PE Bag
	A1=1u"	B1=1U"	B: Tape & Reel
	A2=1.5u"	B2=1.5U"	C: Tube
	A3=2u"	B3=2U"	D: Tube+CAP
	A4=3u"	B4=3U"	E: Tray
	A5=5u"	B5=5U"	
	A6=10u"	B6=10U"	
	A7=15u"	B7=15U"	
	A8=20u"	B8=20U"	
	A9=30u"	B9=30U"	
	S1=Goldary Tin Plated		
	S2=Matte Tin Plated		
	S3=Tin-plated High-temperature		

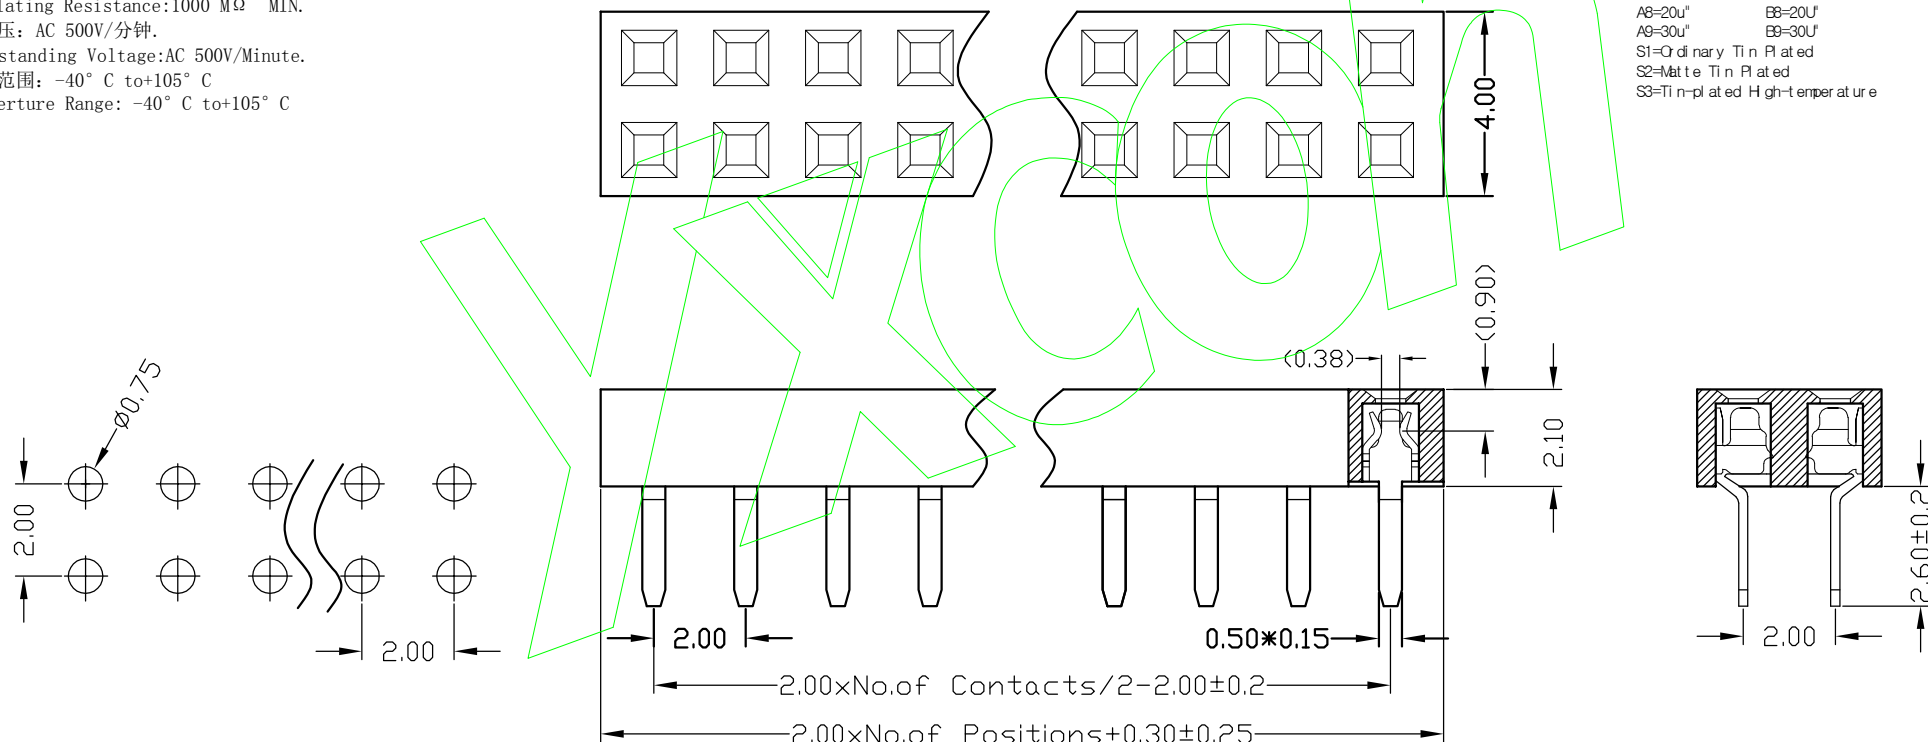

				OPERATION		SCALE		Fit	东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	刘伟 2020.12.03	PART NO	F221-12XXXXXSUXX
				X.XXX	±0.10						
				Angle	±3°	SHEET	1/1	CHECK		TITLE	2.0间距 塑高2.0 双排母 180度 U型
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.	