

Specifications

Ordering Information

F385-11 XX XX X SY X 1

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing:PA6T+30%G.F UL94V-0, Color:Black

端子：磷铜，镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor, 1u" MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current:1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

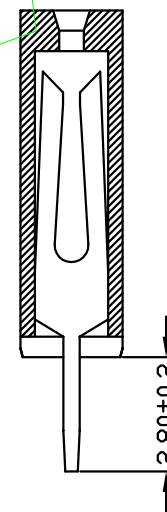
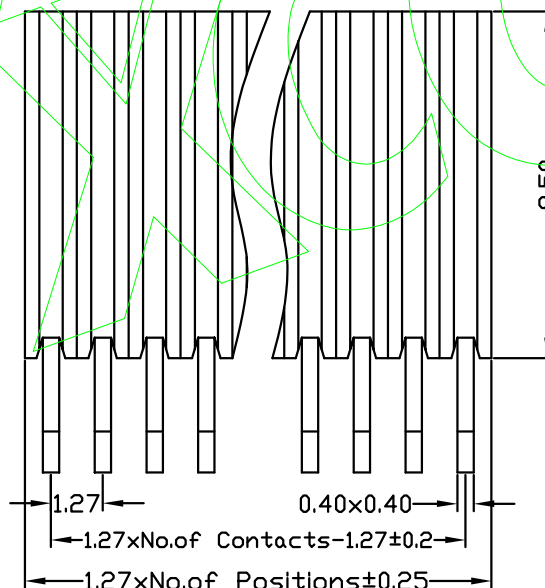
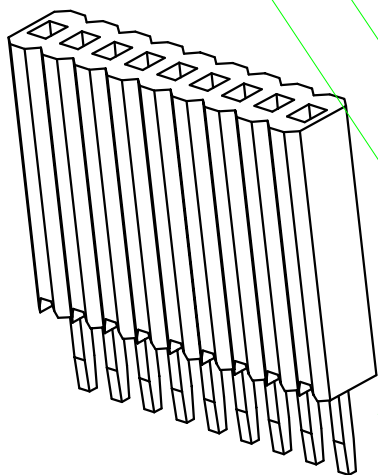

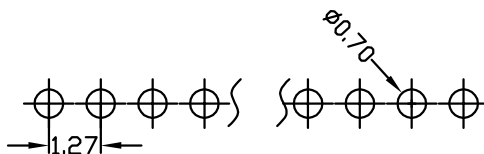
绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance:1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage:AC 500V/Minute.

温度范围: -40°C to $+105^{\circ}\text{C}$

Temperature Range: -40°C to $+105^{\circ}\text{C}$ 

NO. OF PINS
PER ROW
1~50P

Contract	Plating
Full of Gold	Semi-
A0=0.8u ¹¹	B0=0

INSULATOR
MATERIAL:
A: PBT

PACKING
A: PE Bag
B: Tape & Reel

$A1=1u''$
 $A2=1.5u''$
 $A3=2u''$
 $A4=3u''$
 $A5=5u''$
 $A6=10u''$
 $A7=15u''$
 $A8=20u''$
 $A9=30u''$

$$\begin{aligned} B1 &= 1U'' \\ B2 &= 1.5U'' \\ B3 &= 2U'' \\ B4 &= 3U'' \\ B5 &= 5U'' \\ B6 &= 10U'' \\ B7 &= 15U'' \\ B8 &= 20U'' \\ B9 &= 30U'' \end{aligned}$$

J' B: PA6T
C: PA9T
D: LCP

C: Tube
D: Tube+CAP
E: Tray

S1=Ordinary Tinned Plate

S2=Matte Tin Plated

S3=Ti n-pl at ed H gh-t emper at ur e

				OPERATION		SCALE		Fit	 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	刘伟 2020.12.03	PART NO	F385-11XXXXXXSYX1
				X.XXX	±0.10						
				Angle	±3°	SHEET	1/1	CHECK		TITLE	1.27间距 塑高8.5 单排母 180度 Y型
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.	