

Ordering Information

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing:PA6T+30%G. F UL94V-0, Color:Black

端子：磷铜，镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor, 1u" MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current:1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance:1000 MΩ MIN.




耐电压: AC 500V/分钟.

Withstanding Voltage:AC 500V/Minute.

温度范围: -40°C to $+105^{\circ}\text{C}$

Temperture Range: -40° C to+105° C

NQ OF PINS PER ROW 2-50P	Contact Plating	INSULATOR	PACKING
	Full Contact Gold	MATERIAL:	A: PE Bag
	A0=0.8u"	B: PA9T	B: Tape & Reel
	A1=1u"	C: LCP	C: Tube
	A2=1.5u"		D: Tube+CAP
	A3=2u"		E: Tray
	A4=3u"		
	A5=5u"		
	A6=10u"		
	A7=15u"		
	A8=20u"		
	A9=30u"		
	S1=Ordinary Tin Plated		
	S2= Matte Tin Plated		
	S3= Tin-plated High-temperature		

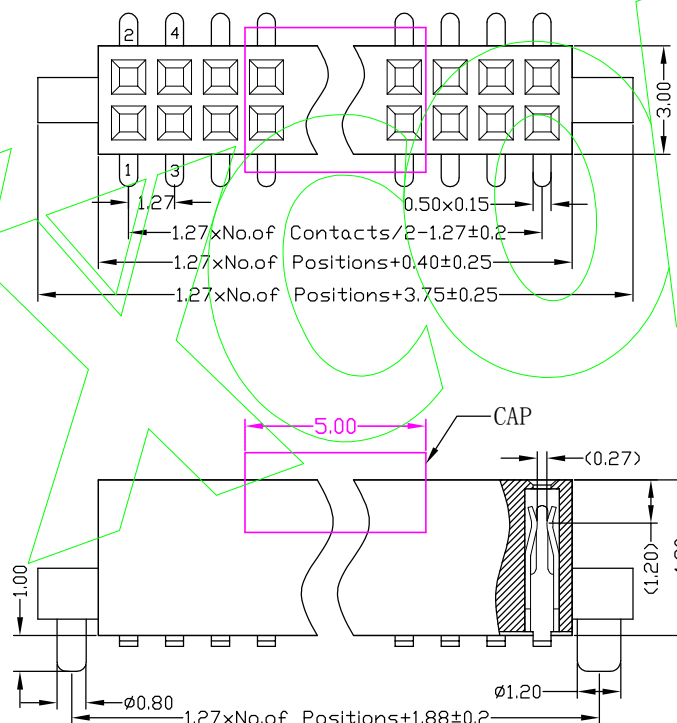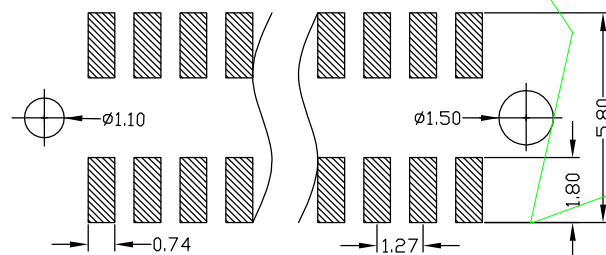

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	刘伟 2020.12.03	PART NO	F343-12XXXXMUX3	
				X.XXX	±0.10							
				Angle	±3°	SHEET	2/2	CHECK		TITLE	1.27间距 塑高4.3 双排母 SMT U型 带大小外柱	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Cust order No.		

Ordering Information

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing:PA6T+30%G. F UL94V-0, Color:Black

端子：磷铜，镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor, 1u" MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current:1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.




绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance:1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage:AC 500V/Minute.

温度范围: -40°C to $+105^{\circ}\text{C}$

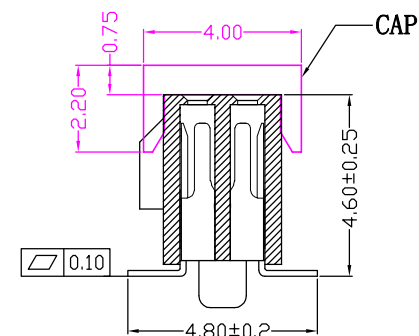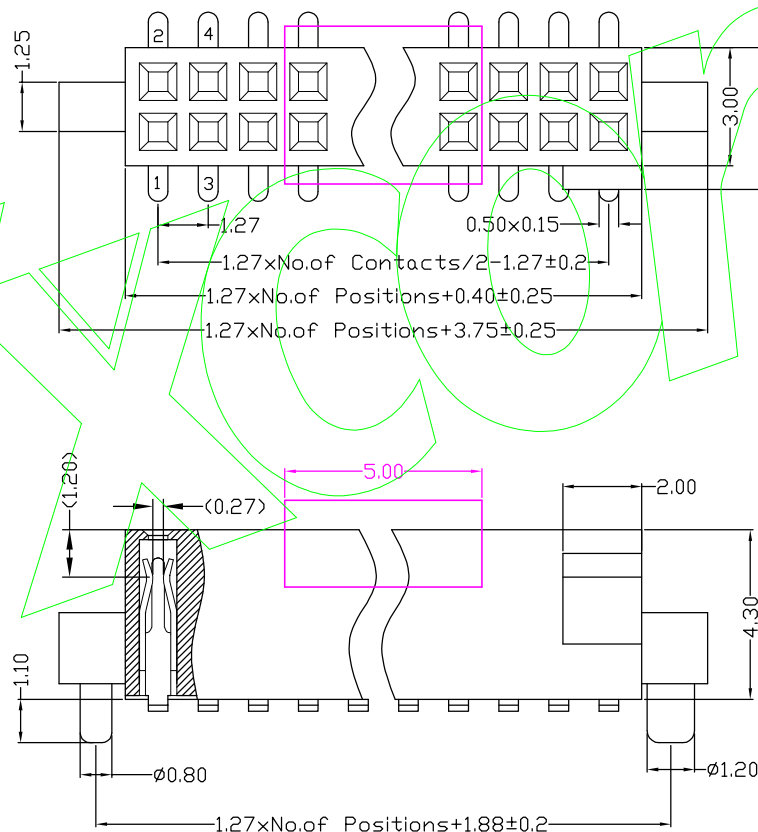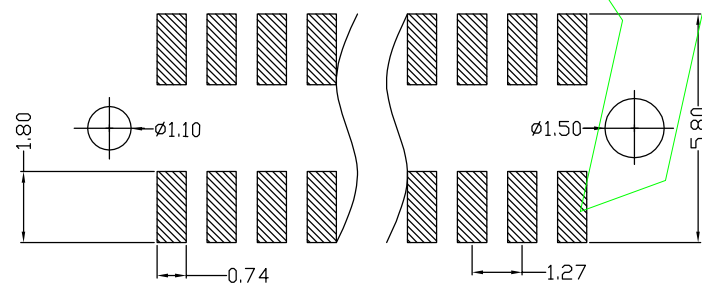Temperature Range: -40°C to $+105^{\circ}\text{C}$ 

NO. OF PINS
PER ROW
2~50P

Cont
Ful I of
A0=0.8u^{II}

at i ng
Semi -
BO=C

INSULATOR
MATERIAL:
B: PA6T

PACKING
A: PE Bag
B: Tape & Reel

A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"

B1=1U'
B2=1.5U'
B3=2U'
B4=3U'
B5=5U'
B6=10U'
B7=15U'
B8=20U'
B9=30U'

C PA9T
D LOP

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

				OPERATION		SCALE		Fit	 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	刘伟 2020.12.03	PART NO	F343-12XXXXXMUX4
				X.XXX	±0.10						
				Angle	±3°	SHEET	2/2	CHECK		TITLE	1.27间距 塑高4.3 双排母 SMT U型 带外柱 带防呆
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.	