

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.





温度范围: -40° C to +105° C

Temperature Range: -40° C to +105° C

Ordering Information

F334-12 XX XX X SU X 1

NO. OF PINS PER ROW 2-50P	Contact Full of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Plating Semi-gold B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"	INSULATOR MATERIAL: B: PA6T C: PA9T D: LCP	PACKING A: PE Bag B: Tape & Peel C: Tube D: Tube+CAP E: Tray
S1=Ordinary Tin Plated	S2=Matte Tin Plated	S3=Tin plated High-temperature		

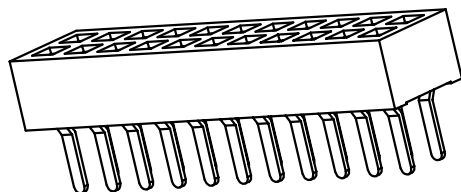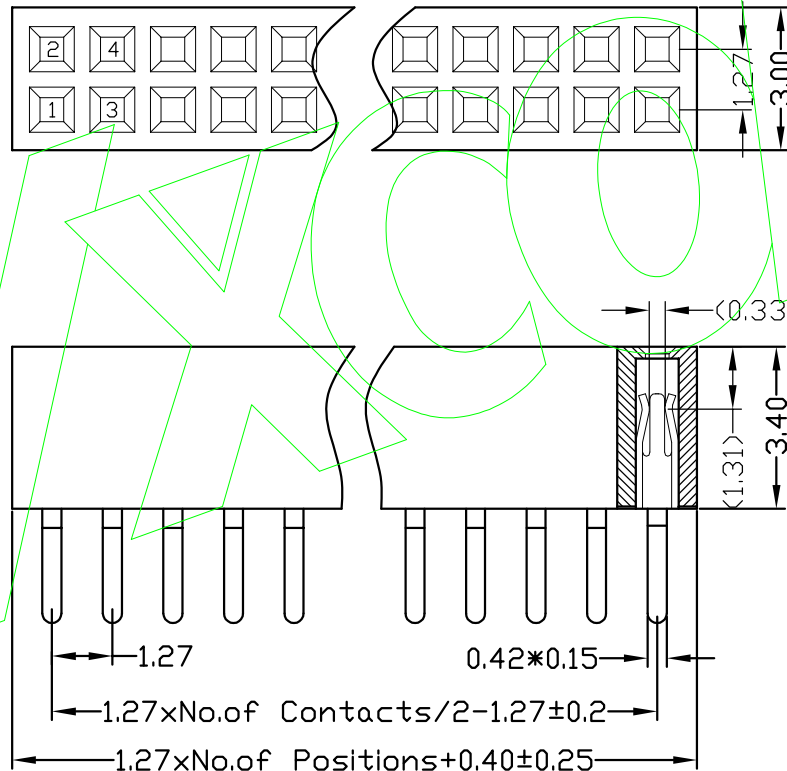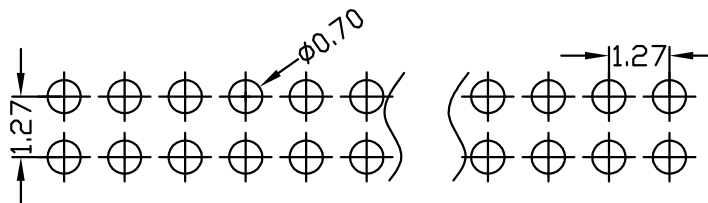

				OPERATION	SCALE	Fit	东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co., Ltd.			
				X.X ±0.25	UNIT	MM				
				X.XX ±0.20	SIZE	A4	DESIGN	刘伟 2020.12.03	PART NO	F334-12XXXXXSUX1
				X.XXX ±0.10	SHEET	1/1	CHECK		TITLE	1.27间距 塑高3.4 双排母 180度 U型
				Angle ±3°	PROJ.	☉	APPROVE		Customer No.	
				DIM TOL						
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION							