

Specifications


备注 (Remark)
 1. 材料 (MATERIAL)
 胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA9T+30%G.F UL94V-0, Color: Black
 端子: 青铜, 镍底30u"MIN, 表面镀金1u"MIN
 Contact: Bronze, 1u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
 额定电流: 2 AMP
 Rating Current: 2 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40° C to +105° C
 Temperature Range: -40° C to +105° C

Ordering Information

F211-11 12 A0 C MY B 2

NO. OF PINS PER ROW 2~40P	Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	INSULATOR MATERIAL: B: PA6T C: PA9T D: LCP	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
---------------------------------	---	---	---	---

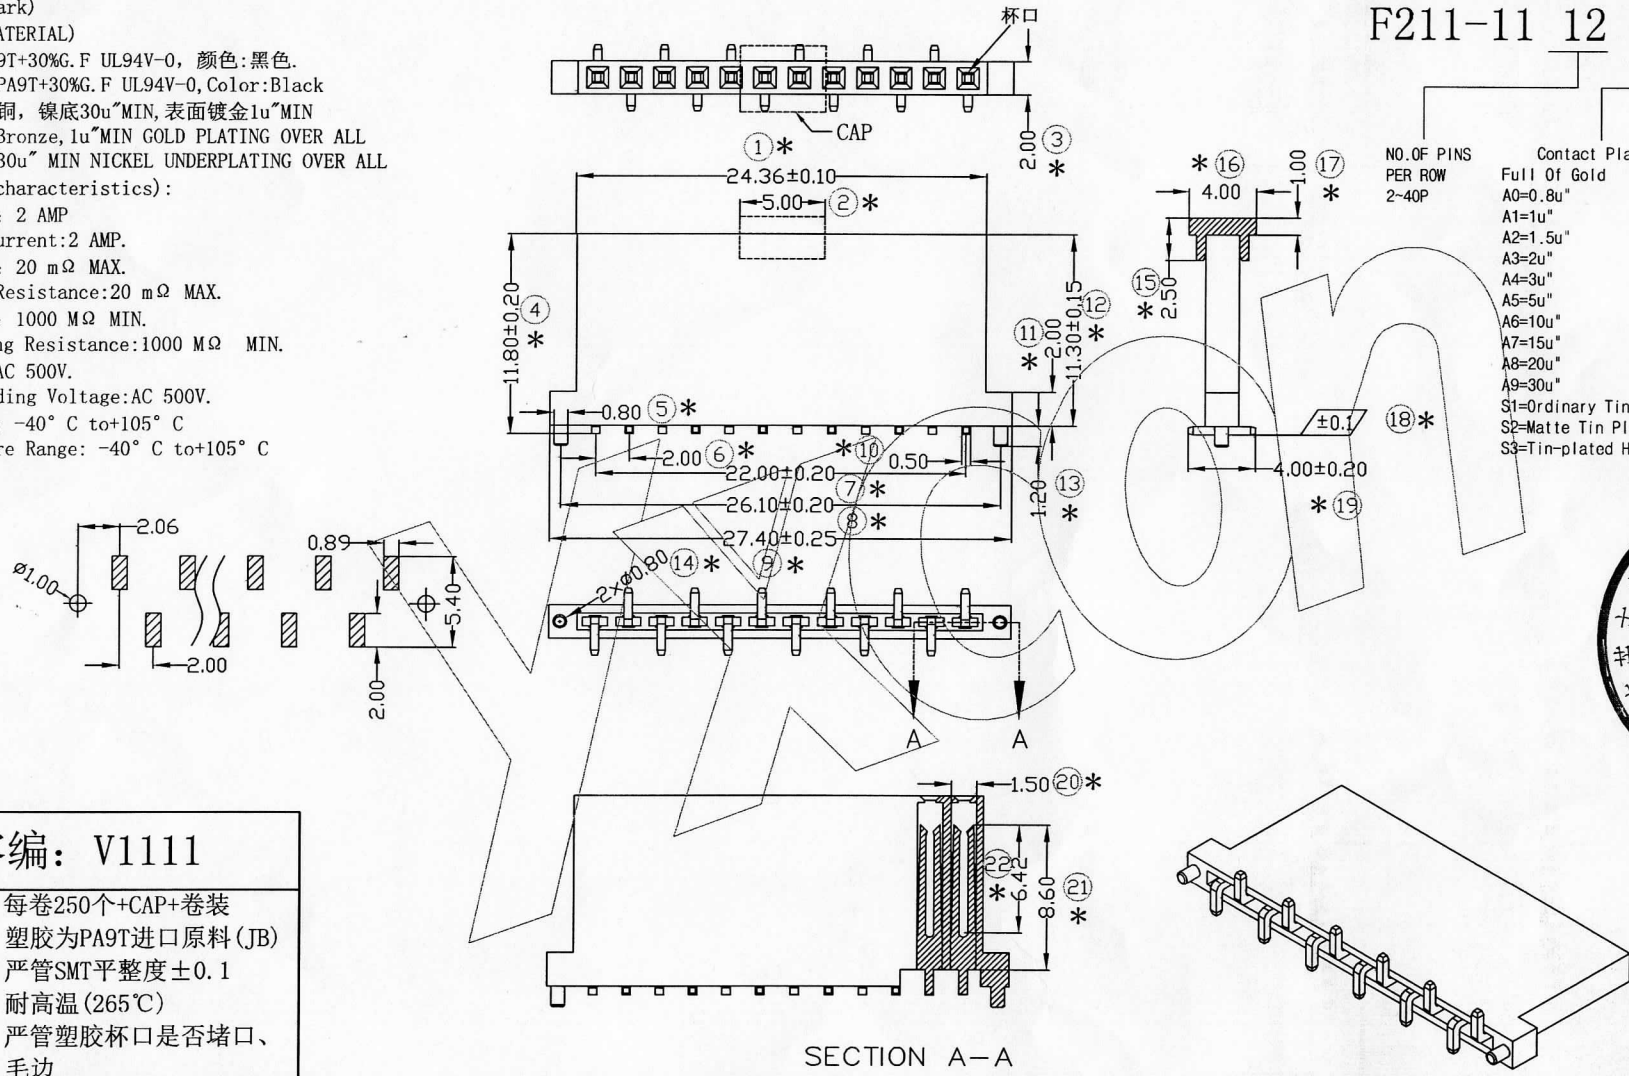

SECTION A-A



客编: V1111

注意
 事项

- 每卷250个+CAP+卷装
- 塑胶为PA9T进口原料 (JB)
- 严管SMT平整度±0.1
- 耐高温 (265°C)
- 严管塑胶杯口是否堵口、毛边
- 装入成品后满PIN插入力 0.8-1.4Kg (A1)

				OPERATION		SCALE		Fit		Yxcon 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co., Ltd.		
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN		PART NO.		
				X.XXX	±0.10	SHEET		1/1	CHECK		TITLE:	
REV		DATE		MODIFICATION DESCRIPTION		CHANGE		APPROVE		Customer No.		

F211-1112A0C MY B2
 2.0排母11.3mm塑高 1*12P SMT 带外柱 展宽4.0
 反脚位/Y型/PA9T/镀金/250个+CAP+卷装 V1111