

# Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Phosphor bronze, 0.8u"MIN GOLD PLATING OVER ALL  
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.

温度范围: -40° C to +105° C


Temperature Range: -40° C to +105° C

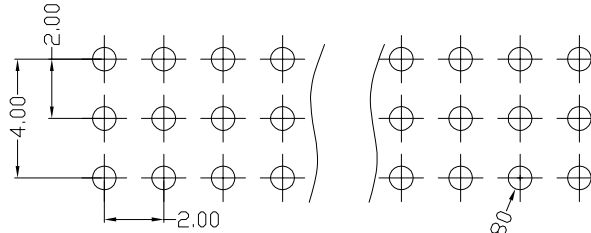

# Ordering Information

F263-13 XX XX X SY X 1

NO. OF PINS PER ROW 3-40P	Contact Full of Gold	Plating Semi-gold	INSULATOR MATERIAL:	PACKING A: PE Bag B: Tape & Peel C: Tube D: Tube+CAP E: Tray
A0=0.8u"	E0=0.8U'	B0=0.8U'	A: PBT	
A1=1u"	B1=1U'	B1=1U'	B: PA6T	
A2=1.5u"	B2=1.5U'	B2=1.5U'	C: PA9T	
A3=2u"	B3=2U'	B3=2U'	D: LCP	
A4=3u"	B4=3U'	B4=3U'		
A5=5u"	B5=5U'	B5=5U'		
A6=10u"	B6=10U'	B6=10U'		
A7=15u"	B7=15U'	B7=15U'		
A8=20u"	B8=20U'	B8=20U'		
A9=30u"	B9=30U'	B9=30U'		
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

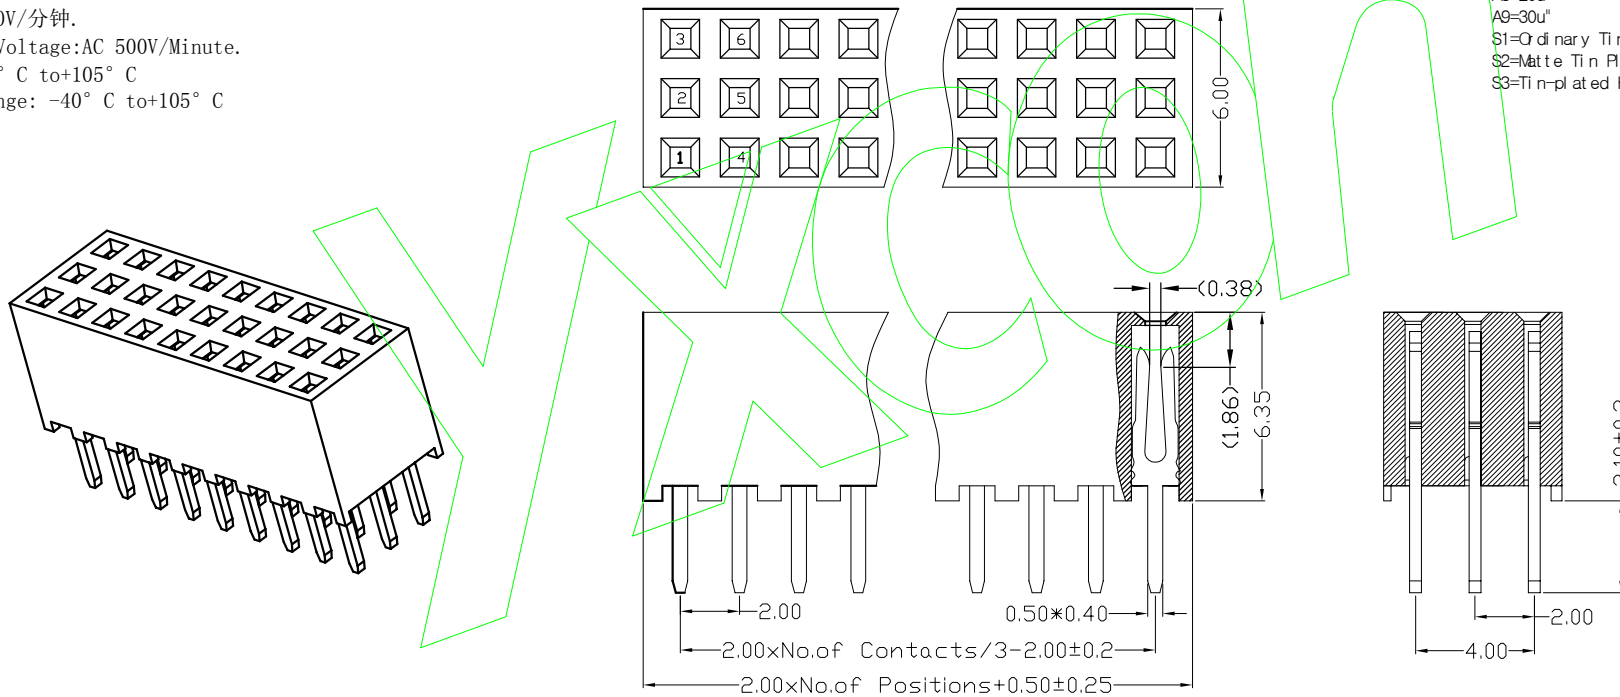

OPERATION	
XX	±0.25
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

SCALE

Fit

UNIT

MM

**Yxcon**

东莞市宇熙精密连接器有限公司

www.yxcon.com

Dongguan Yuxi Electronic Co., Ltd.

SIZE

A4

DESIGN

刘伟 2021.6.25

PART NO

F263-13XXXXXXSYX1

SHEET

1/1

CHECK

TITLE

2.0间距 塑高6.35 三排母 180度 Y型 波浪型

PRQJ.

APPROVE

Customer No.

MODIFICATION DESCRIPTION

REV DATE SYMBOL

# Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL  
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.



Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.

温度范围: -40° C to +105° C


Temperature Range: -40° C to +105° C

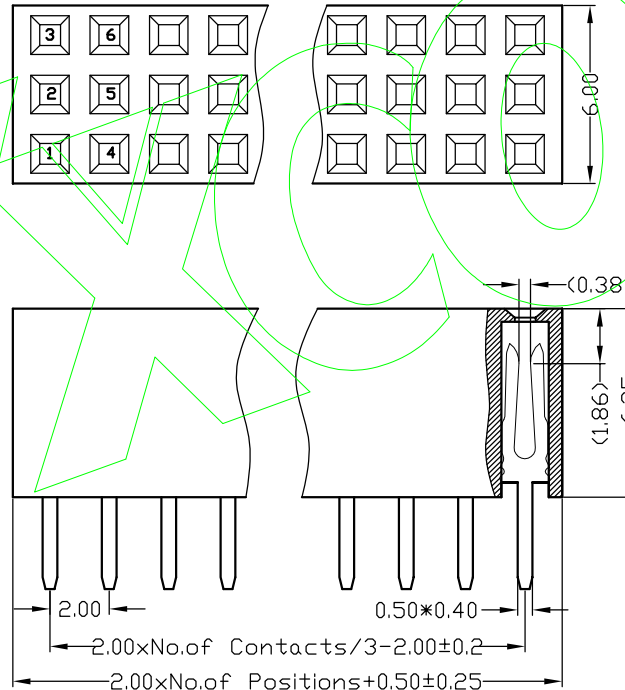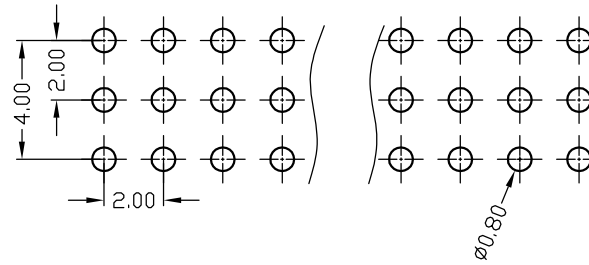

# Ordering Information

F263-13 XX XX X SY X 2

NO. OF PINS PER ROW	Contact Full of Gold	Plating Semi-gold	INSULATOR MATERIAL:	PACKING
3-40P	A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	A: PBT B: PA6T C: PA9T D: LCP	A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature			

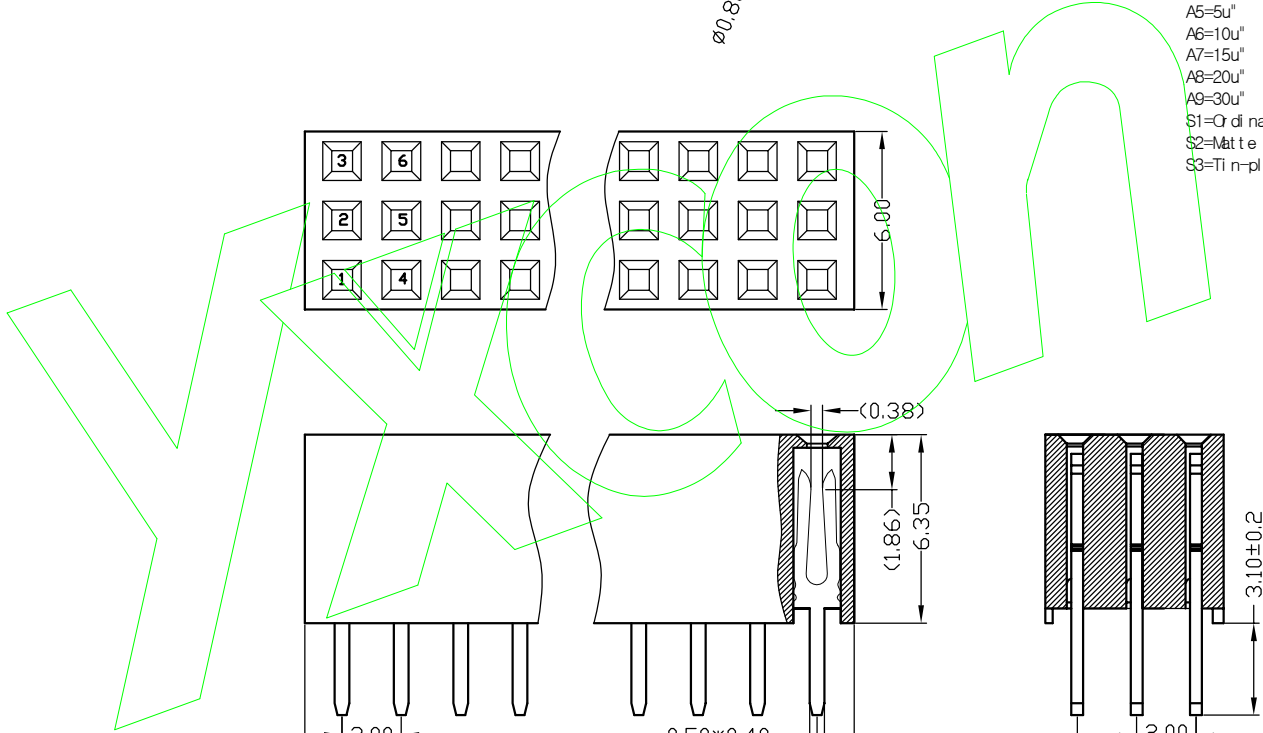

REV			DATE			SYMBOL			MODIFICATION DESCRIPTION			OPERATION		SCALE		Fit		Yxcon		东莞市宇熙精密连接器有限公司	
												X.X ±0.25		UNIT		MM		www.yxcon.com		Dongguan Yuxi Electronic Co., Ltd.	
												X.XX ±0.20		SIZE		A4		DESIGN		刘伟 2021.6.25	
												X.XXX ±0.10		SHEET		1/1		CHECK		PART NO	
												Angle ±3°		PRQJ.		APPROVE				TITLE: 2.0间距 塑高6.35 三排母 180度 Y型 凹槽型	
												DIM TOL								Customer No.	