

Specifications

Ordering Information

1. 材料(MATERIAL)

Housing:PA6T+30%G.F UL94V-0, Color:Black

Contact: Phosphor bronze, 1u" MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

额定电流: 2 AMP

额定电流: 2 AMP

Raring Current:2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

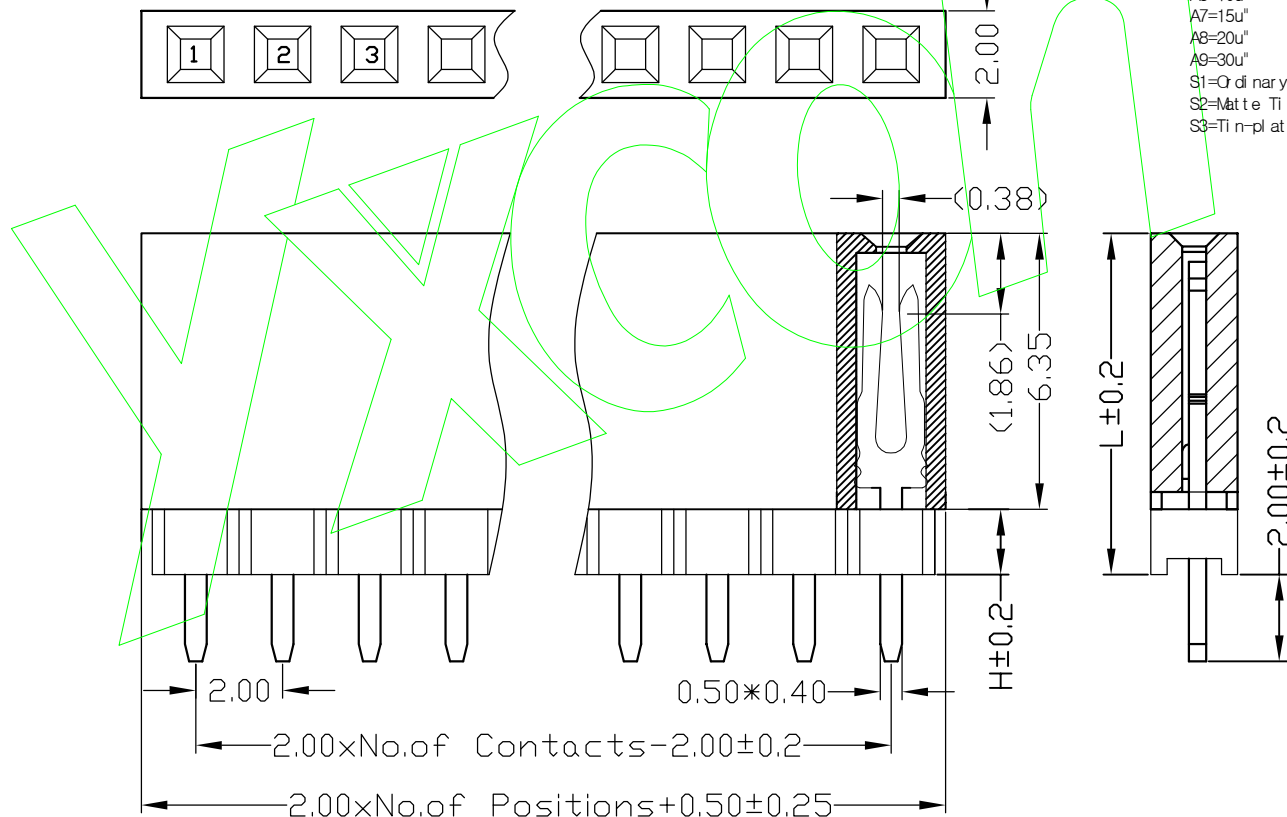

绝缘阻抗: 1000 M Ω MIN.

Insulating Resistance:1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage:AC 500V/Minute.

温度范围: -40°C to $+105^{\circ}\text{C}$

Temperature Range: -40°C to $+105^{\circ}\text{C}$ 

NQ OF PINS PER ROW 2-40P	Contact Full Cl Gld	Plating Semi-gold	INSULATOR MATERIAL:	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
	A0=0.8u"	B0=0.8U'	A: PBT	
	A1=1u"	B1=1U'	B: PA6T	
	A2=1.5u"	B2=1.5U'	C: PA9T	
	A3=2u"	B3=2U'	D: LCP	
	A4=3u"	B4=3U'		
	A5=5u"	B5=5U'		
	A6=10u"	B6=10U'		
	A7=15u"	B7=15U'		
	A8=20u"	B8=20U'		
	A9=30u"	B9=30U'		
	S1=Q of nary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High temperature			

DIM 'H'	DIM 'L'
1.00	7.00
1.50	7.60
2.00	8.10

				OPERATION		SCALE		Fit		 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	刘伟 2020.12.03	PART NO	F263-21XXXXXSYX1	
				X.XXX	±0.10							
				Angle	±3°	SHEET	1/1	CHECK		TITLE	2.0间距 塑高6.35+1.5排针塑胶 单排母 双塑 180度 V型	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.		

