

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.

温度范围: -40° C to +105° C

Temperture Range: -40° C to +105° C

Ordering Information

F168-12 XX XX X MP X 2

NO. OF PINS
PER ROW
2-40P

Contact Plating
Full of Gold
A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"

INSULATOR
MATERIAL:
A: PBT
B: PA6T
C: PA9T
D: LCP

PACKING
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature



S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

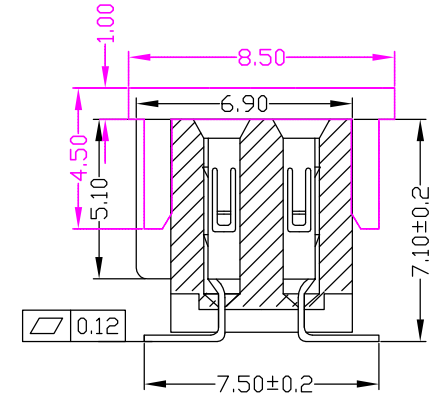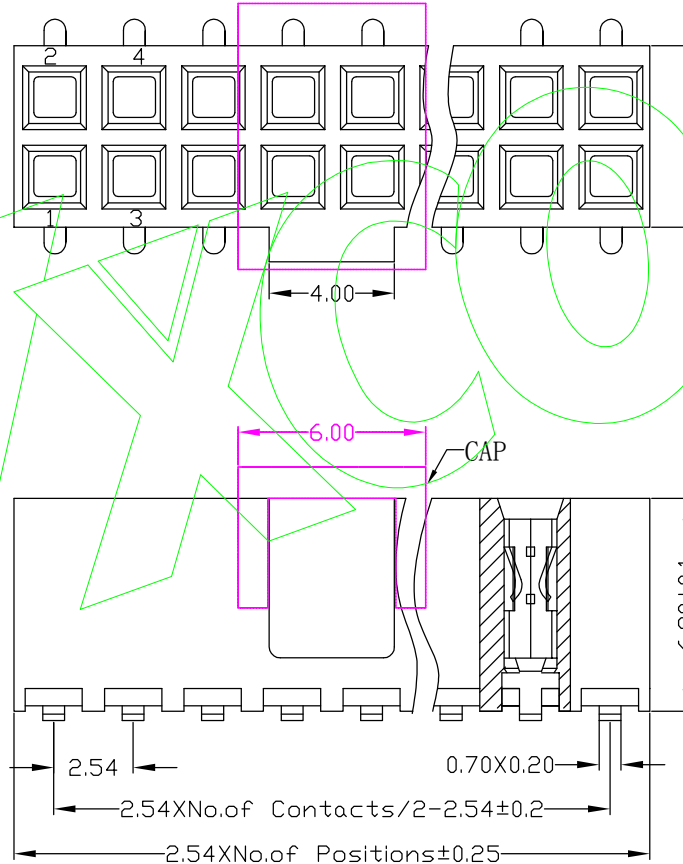

				OPERATION		SCALE		Fit		Yxcon		东莞市宇熙精密连接器有限公司	
				X.X		UNIT		MM		www.yxcon.com		Dongguan Yuxi Electronic Co., Ltd.	
				X.XX		SIZE		A4		DESIGN		PART NO	
				X.XXX		SHEET		1/1		CHECK		TITLE	
				Angle		PROJ.		APPROVE				Customer No.	
				DIM		TOL							
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION										
1													
2													
3													
4													
5													
6													
7													
8													
9													
10													