

# Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA9T+30%G.F UL94V-0, Color: Black

端子: 磷铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL  
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.


温度范围: -40° C to +105° C

Temperature Range: -40° C to +105° C

# Ordering Information

F225-12 XX XX X MP X 1

NO. OF PINS PER ROW 2-40P	Contact Plating Full Cf Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	INSULATOR MATERIAL: E-PA6T C-PA9T D-LCP	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
S3=Ti n-pl ated H gh-temper ature				
S4=H gh Tempret ure Mtt TIn				

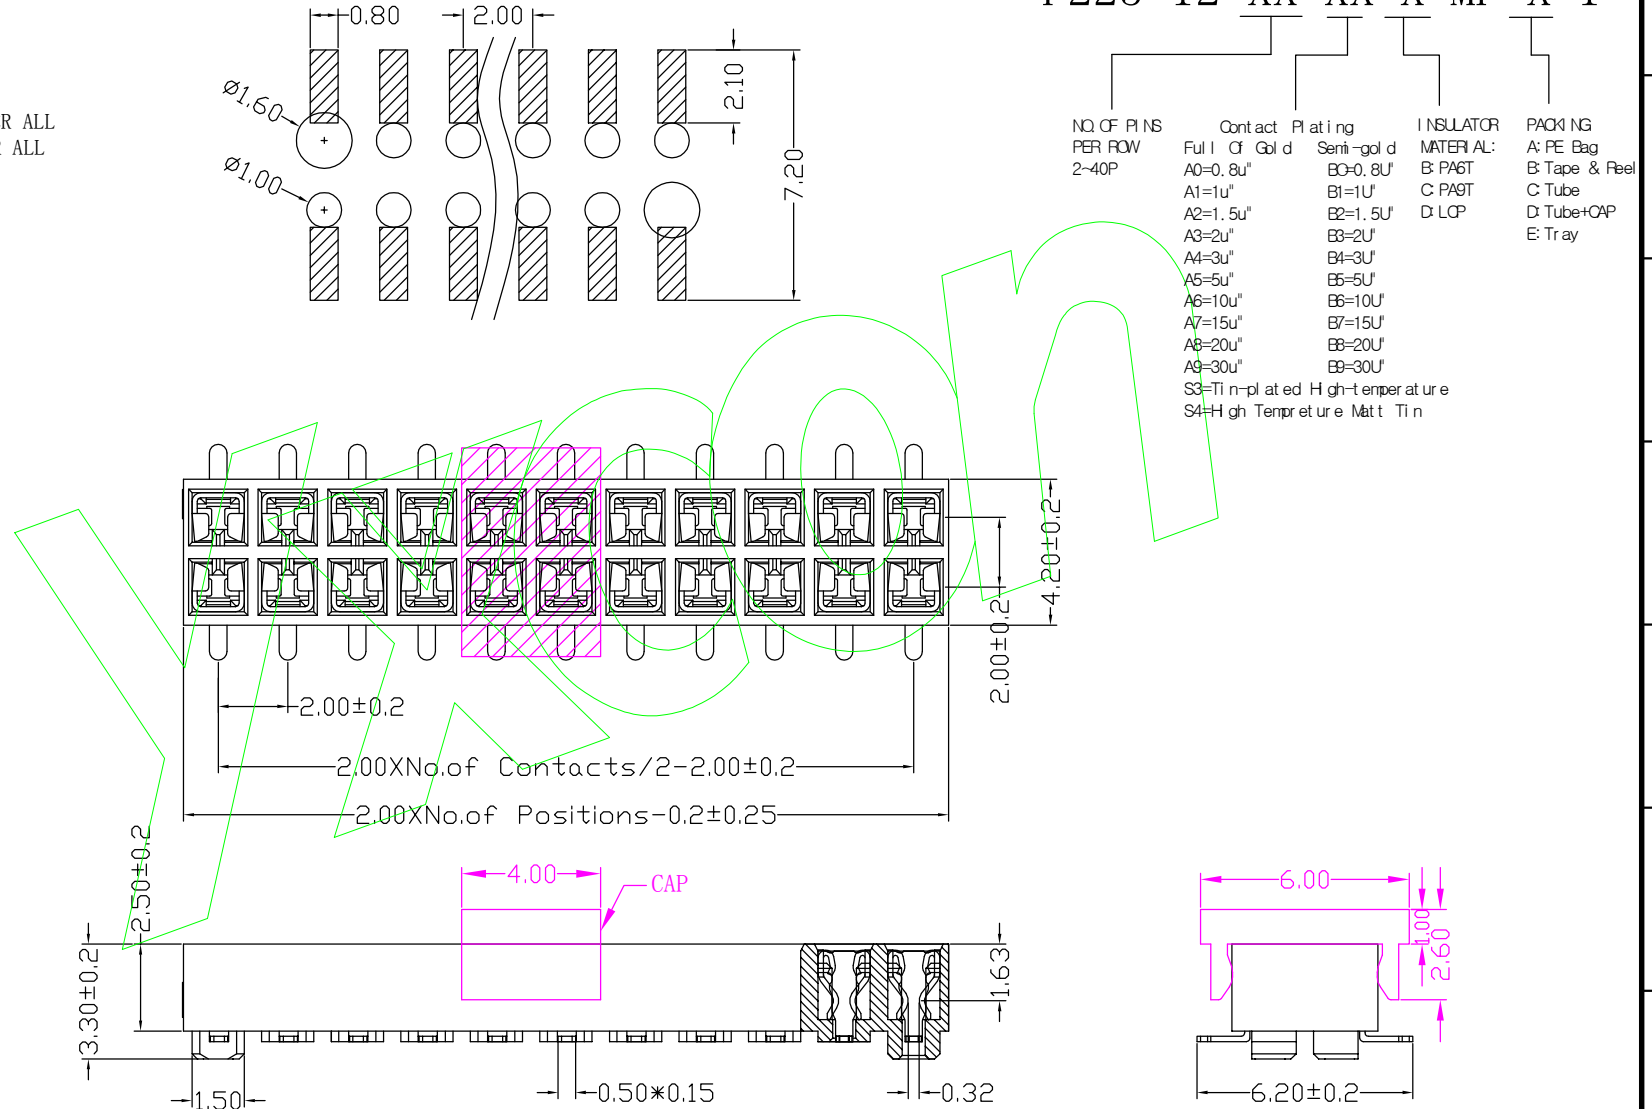

			OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co., Ltd.	
			X.X	+0.25	UNIT		MM			
			X.XX	+0.20	SIZE	A4	DESIGN	周芳杰 2021.8.4	PART NO.	F225-12XXXXXXMPX1
			X.XXX	+0.10	SHEET	1/1	CHECK		TITLE:	2.0间距 塑高2.5 双排母 SMT 上插式
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION		PROJ.	APPROVE			Customer No.	