

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Phosphor bronze, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.



温度范围: -40° C to +105° C

Temperature Range: -40° C to +105° C

Ordering Information

F185-11 XX XX X SU X 2

NO. OF PINS PER ROW 1-40P	Contact Full of Gold	Plating Semi-gold	INSULATOR MATERIAL:	PACKING
	A0=0.8u"	E0=0.8u"	A: PBT	A: PE Bag
	A1=1u"	B1=1u"	B: PA6T	B: Tape & Reel
	A2=1.5u"	E2=1.5u"	C: PA9T	C: Tube
	A3=2u"	B3=2u"	D: LCP	D: Tube+CAP
	A4=3u"	B4=3u"		E: Tray
	A5=5u"	B5=5u"		
	A6=10u"	B6=10u"		
	A7=15u"	B7=15u"		
	A8=20u"	B8=20u"		
	A9=30u"	B9=30u"		
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

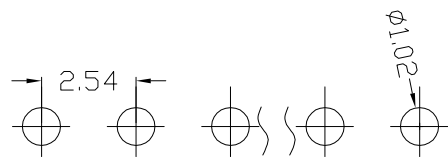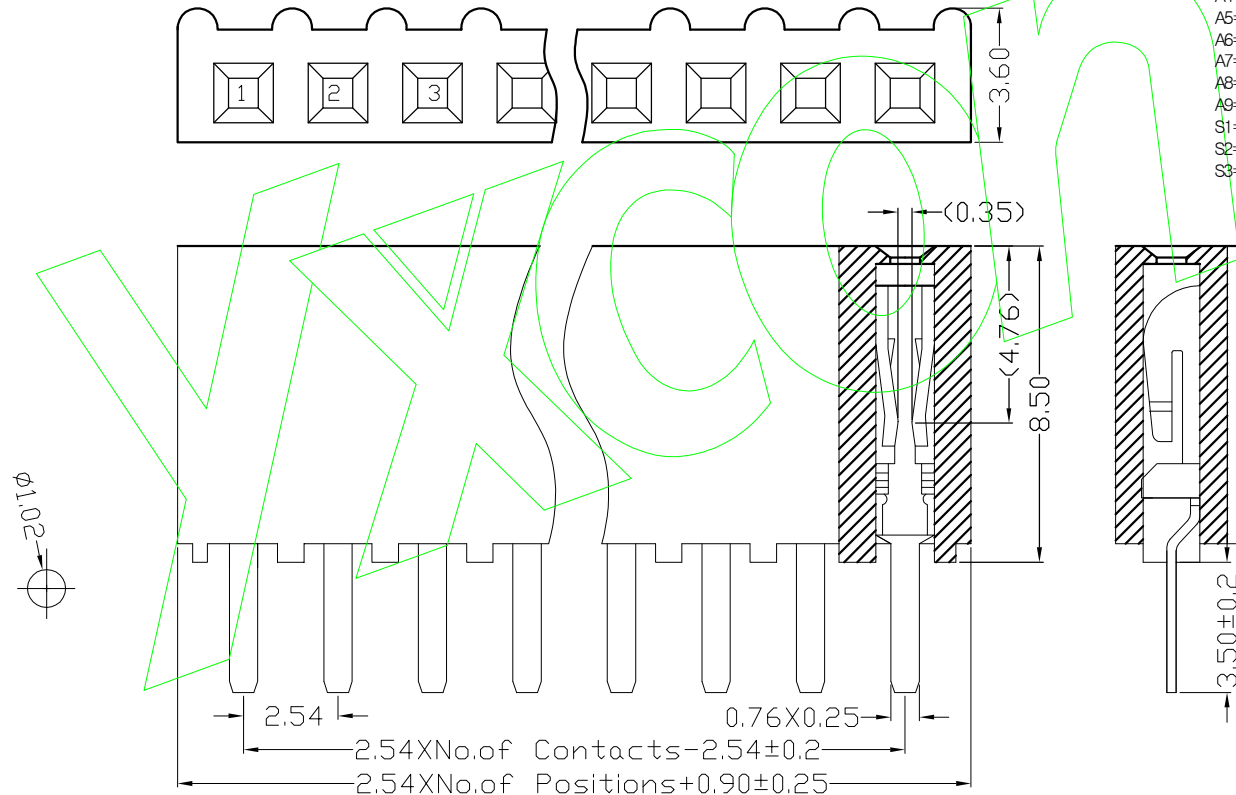

REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	OPERATION		SCALE		Fit		Yxcon 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co., Ltd.	
				X.X	±0.25	UNIT	MM	DESIGN	周芳杰 2021.6.28		
				X.XX	±0.20	SIZE	A4	CHECK		PART NO	F185-11XXXXXSUX2
				X.XXX	±0.10	SHEET	1/1	APPROVE		TITLE	2.54间距 塑高8.5 单排母 180度 U型 波浪型
				Angle	±3°	PROJ.	☉			Customer No.	
				DIM	TOL						