


Ordering Information

备注(Remark)
1. 材料(MATERIAL)
胶芯: PA6T+30%G. F UL94V-0, 颜色:黑色.
Housing:PA6T+30%G. F UL94V-0, Color:Black
端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN
Contact:Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
 额定电流: 3 AMP
 Rating Current: 3 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V/分钟.
 Withstanding Voltage: AC 500V/Minute.
 温度范围: -40° C to +105° C
 Temperature Range: -40° C to +105° C

NQ OF PINS PER ROW 2-40P	Contact Plating	INSULATOR	PACKING
Full Of Gold	Semi-gold	MATERIAL:	A: PE Bag
A0=0.8u"	B0=0.8U"	B: PA6T	B: Tape & Free
A1=1u"	B1=1U"	C: PA9T	C: Tube
A2=1.5u"	B2=1.5U"	D: LCP	D: Tube+CAP
A3=2u"	B3=2U"		E: Tray
A4=3u"	B4=3U"		
A5=5u"	B5=5U"		
A6=10u"	B6=10U"		
A7=15u"	B7=15U"		
A8=20u"	B8=20U"		
A9=30u"	B9=30U"		
S1=Ordinary Tin Plated			
S2=Matte Tin Plated			
S3=Tin-plated High-temperature			

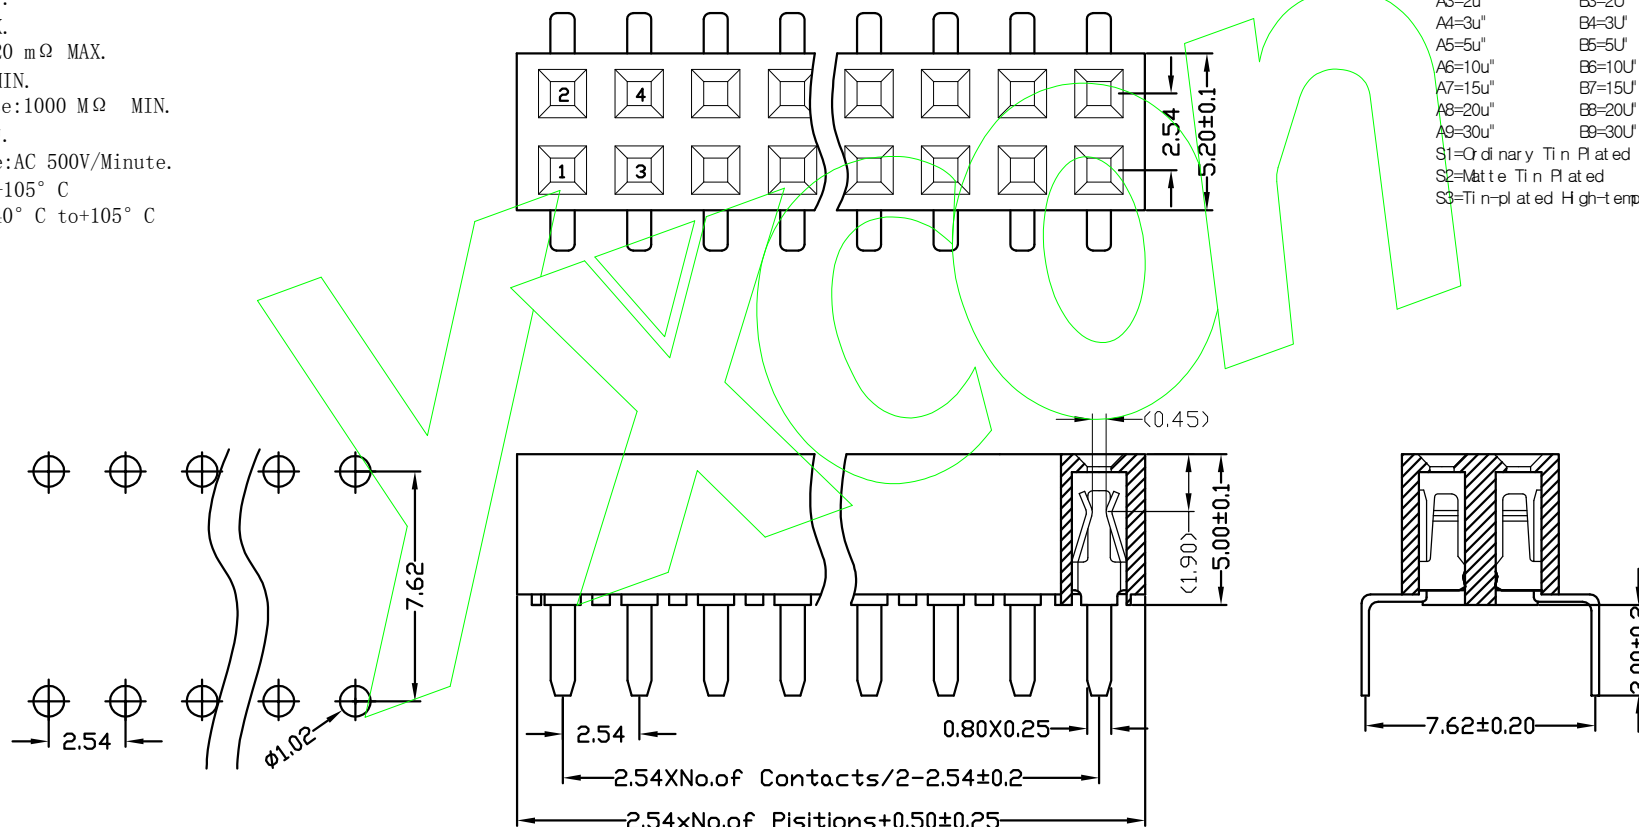

				OPERATION		SCALE		Fit	 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd. www.yxcon.com		
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.6.29	PART NO	F150-12XXXXXWUX3
				X.XXX	±0.10						
				Angle	±3°	SHEET	1/1	CHECK		TITLE	2.54间距 塑高5.0 双排母 蜈蚣脚 U型 脚距7.62
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.	

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.

温度范围: -40° C to +105° C

Temperture Range: -40° C to +105° C

Ordering Information

F150-12 XX XX X WU X 1

NO. OF PINS
PER ROW
2-40P


Contact Plating
Full of Gold
A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"

Plating
Semi-gold
B0=0.8u"
B1=1u"
B2=1.5u"
B3=2u"
B4=3u"
B5=5u"
B6=10u"
B7=15u"
B8=20u"
B9=30u"

INSULATOR
MATERIAL:
B: PA6T
C: PA9T
D: LCP

PACKING
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

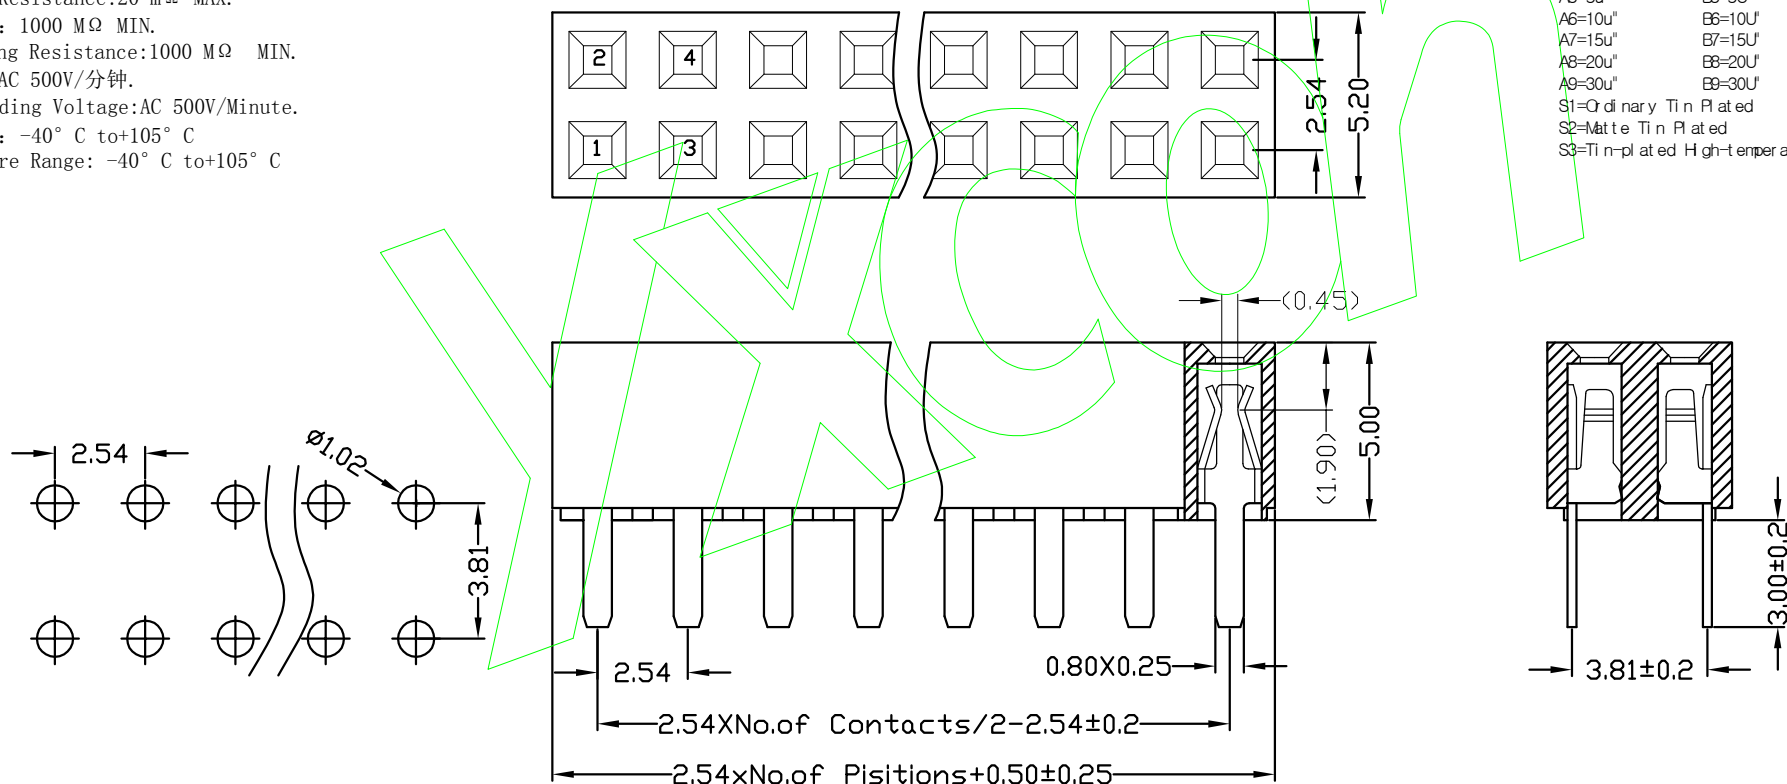

				OPERATION		SCALE		Fit		Yxcon 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.6.29	PART NO	F150-12XXXXXWUX1	
				X.XXX	±0.10							
				Angle	±3°	SHEET	1/1	CHECK		TITLE	2.54间距 塑高5.0 双排母 蜈蚣脚 U型 脚距3.81	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.		