

Specifications


备注 (Remark)
 1. 材料 (MATERIAL)
 胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA6T+30%G.F UL94V-0, Color: Black
 端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN
 Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
 额定电流: 3 AMP
 Rating Current: 3 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V/分钟.
 Withstanding Voltage: AC 500V/Minute.
 温度范围: -40° C to +105° C
 Temperature Range: -40° C to +105° C

Ordering Information

F157-11 XX XX X RY X 1

NO. OF PINS PER ROW 1-40P	Contact Full of Gold	Plating Semi-gold	INSULATOR MATERIAL:	PACKING
A0=0.8u"	E0=0.8U	A: PET	A: PE Bag	
A1=1u"	B1=1U	B: PA6T	B: Tape & Peel	
A2=1.5u"	E2=1.5U	C: PA9T	C: Tube	
A3=2u"	B3=2U	D: LCP	D: Tube+CAP	
A4=3u"	B4=3U		E: Tray	
A5=5u"	E5=5U			
A6=10u"	B6=10U			
A7=15u"	E7=15U			
A8=20u"	B8=20U			
A9=30u"	E9=30U			
S1=Ordinary Tin Plated				
S2=Matte Tin Plated				
S3=Tin-plated High-temperature				

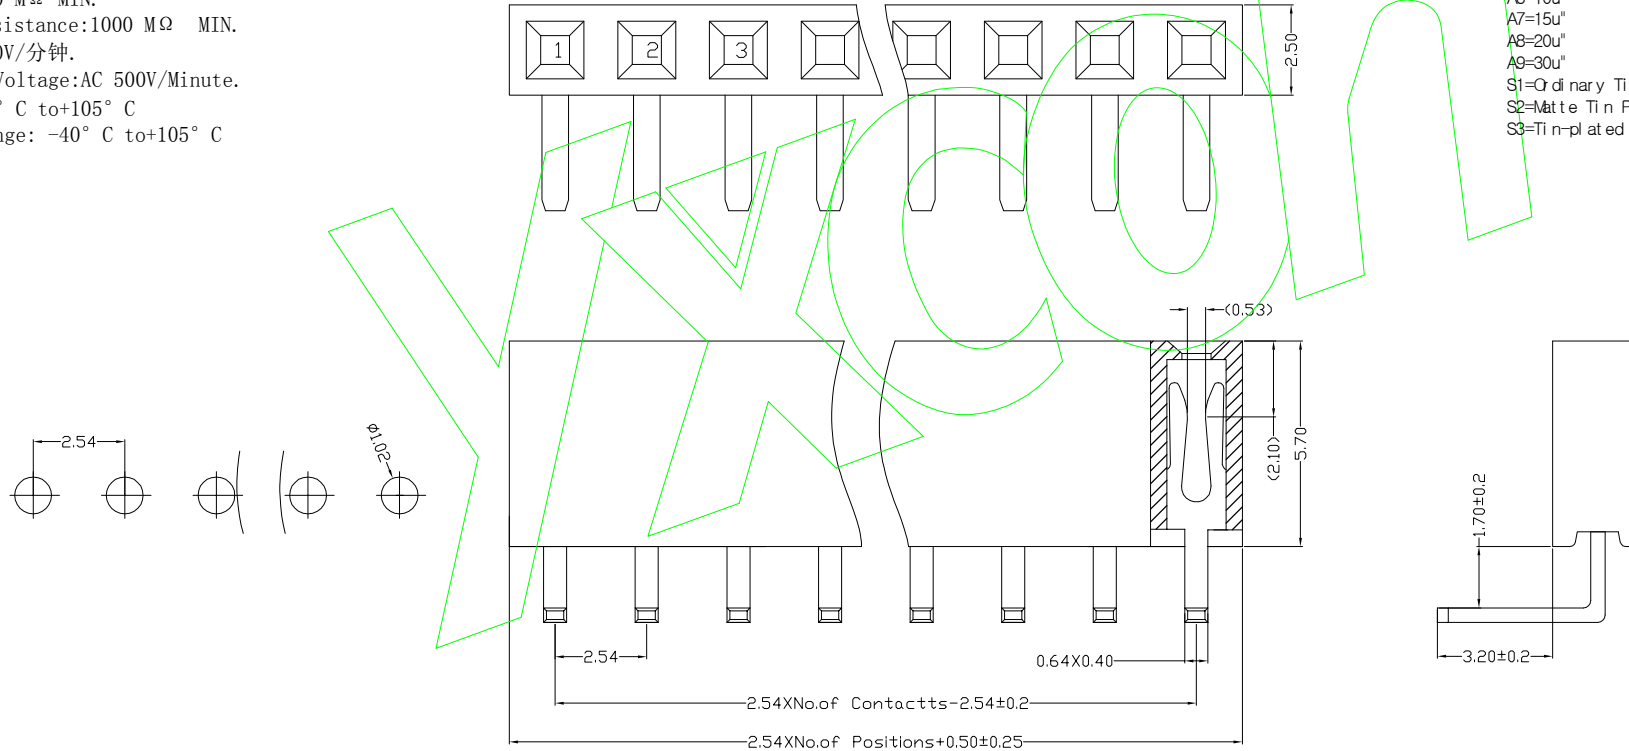

			OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co., Ltd.	
			X.X	±0.25	UNIT		MM			
			X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.6.26	PART NO	F157-11XXXXXXRYX1
			X.XXX	±0.10	SHEET	1/1	CHECK		TITLE	2.54间距 塑高5.7 单排母 90度 Y型
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION		DIAM	TOL	PROJ.	APPROVE	Customer No.	