

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.

温度范围: -40° C to +105° C

Temperture Range: -40° C to +105° C

Ordering Information

F150-11 XX XX X WU X X

NO. OF PINS
PER ROW
1-40P

Full Cl Gold

A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin plated High-temperature

Contact Plating

Serial-gold
B0=0.8u"
B1=1u"
B2=1.5u"
B3=2u"
B4=3u"
B5=5u"
B6=10u"
B7=15u"
B8=20u"
B9=30u"


INSULATOR

MATERIAL:
B: PA6T
C: PA9T
D: LCP


PACKING

A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray




TYPE1: 1
TYPE2: 2

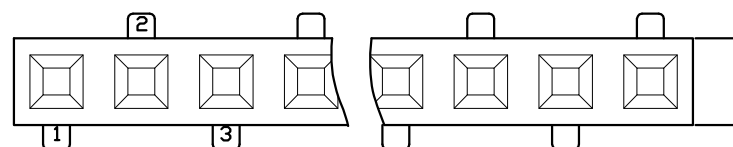

TYPE 1

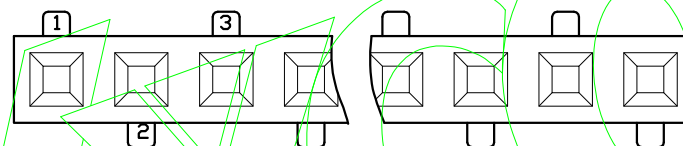

TYPE 2

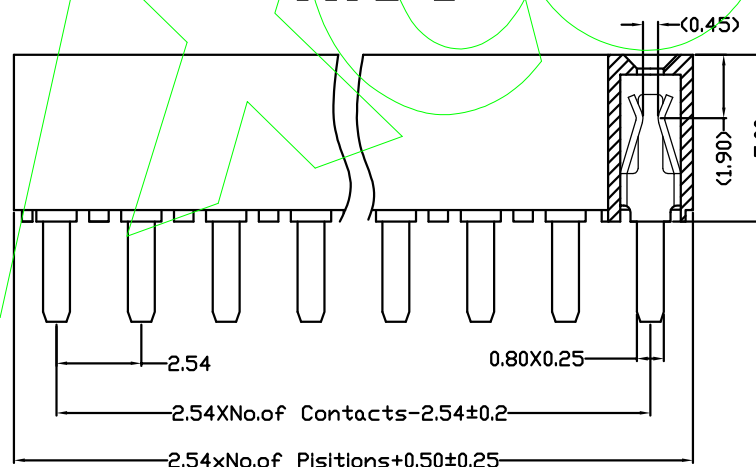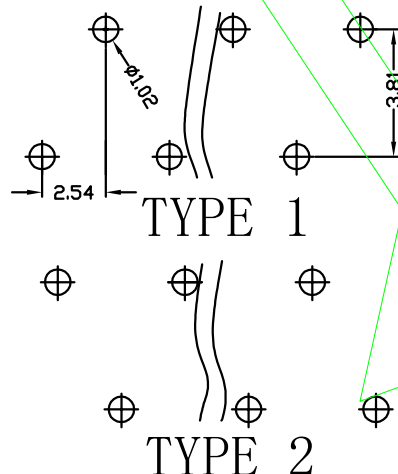

				OPERATION		SCALE		Fit		Yxcon 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.			
				X.X	±0.25	UNIT		MM					
				X.XX	±0.20	SIZE	A4	DESIGN		周芳杰 2021.6.29		PART NO	F150-11XXXXXWUXX
				X.XXX	±0.10	SHEET	1/1	CHECK				TITLE	2.54间距 塑高5.0 单排母 蜈蚣脚 U型
				Angle	±3°	PROJ.				APPROVE			正反脚位 脚距3.81
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL							Customer No.	

Specifications

Ordering Information

F150-11 XX XX X WU X X

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Phosphor bronze, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rated Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.

温度范围: -40° C to +105° C

Temperture Range: -40° C to +105° C

NO. OF PINS
PER ROW
1-40P


Contact Plating
Full of Gold
A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"

Plating
Semi-gold
B0=0.8u"
B1=1u"
B2=1.5u"
B3=2u"
B4=3u"
B5=5u"
B6=10u"
B7=15u"
B8=20u"
B9=30u"


INSULATOR
MATERIAL:
B: PA6T
C: PA9T
D: LCP

PACKING
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray


TYPE1: 1
TYPE2: 2

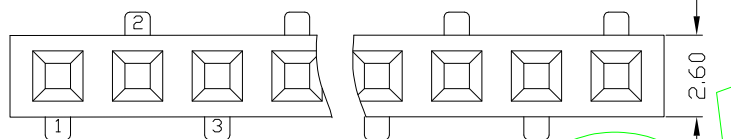

TYPE 1


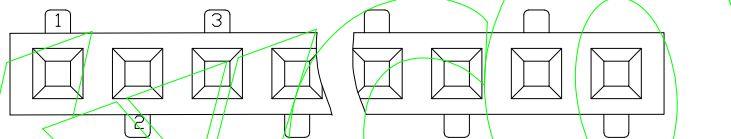


TYPE 2

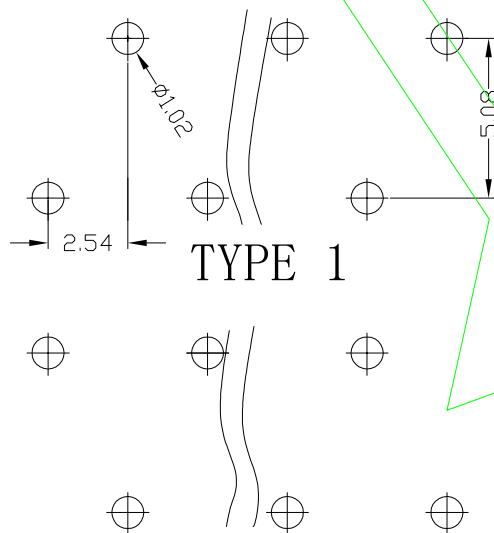

TYPE 1

TYPE 2

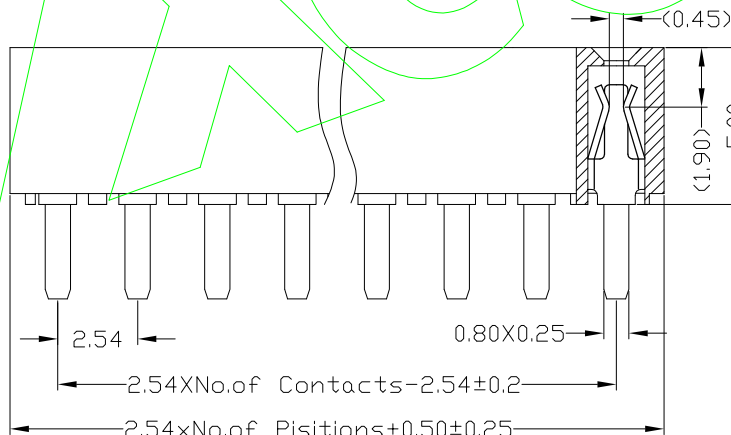

				OPERATION		SCALE		Fit		Yxcon 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.							
				X.X	±0.25	UNIT		MM									
				X.XX	±0.20	SIZE		A4		DESIGN		周芳杰 2021.6.29		PART NO		F150-11XXXXWUXX	
				X.XXX	±0.10												
				Angle	±3°	SHEET		1/1		CHECK				TITLE		2.54间距 塑高5.0 单排母 蜈蚣脚 U型	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.				APPROVE				Customer No.		正反脚位 脚距5.08	