

Specifications





备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.
Housing: PA6T+30%G.F UL94V-0, Color: Black
端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN
Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
额定电流: 3 AMP
Raring Current: 3 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V/分钟.
Withstanding Voltage: AC 500V/Minute.
温度范围: -40° C to +105° C
Temperture Range: -40° C to +105° C

Ordering Information

F136-12 XX XX X MU X 2

NO. OF PINS PER ROW 2~40P
Contact Plating Full of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"
Semi-gold B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"
INSULATOR MATERIAL: B: PA6T C: PA9T D: LCP
PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

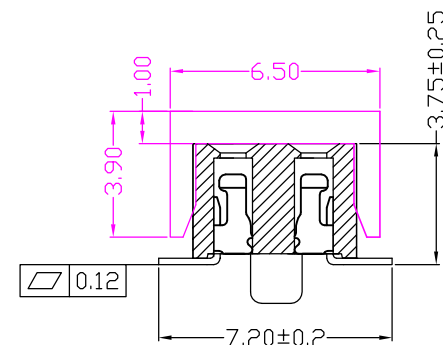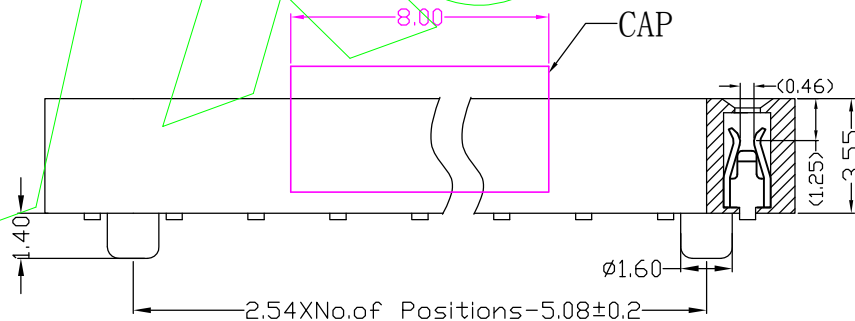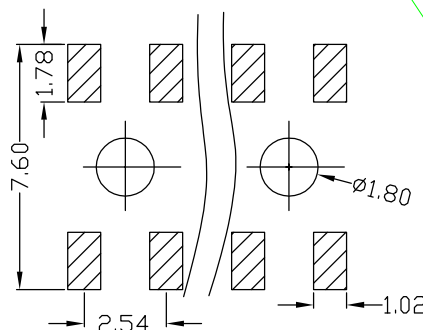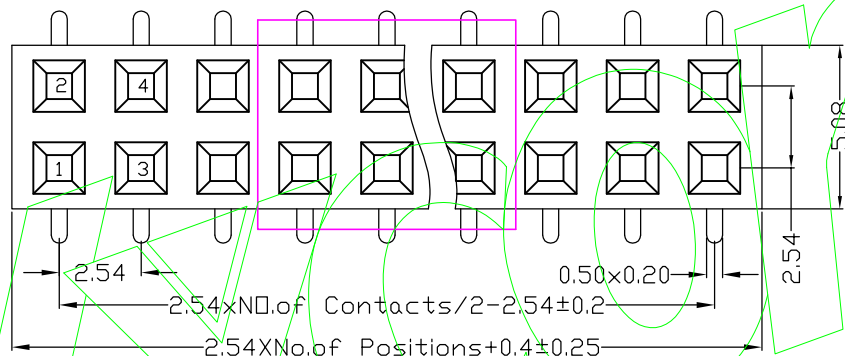

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司			
				X.X	±0.25	UNIT		MM		Dongguan Yuxi Electronic Co., Ltd.			
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.6.25	PART NO	F136-12XXXXMUX2		
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE	2.54间距 塑高3.55 双排母 SMT U型 带柱		
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIAM	TOL	PROJ.	APPROVE			Customer No.			