


Specifications

备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PA6T +30%G.F UL94V-0, 颜色: 黑色.
Housing: PA6T +30%G.F UL94V-0, Color: Black
端子: 磷/青铜, 镍底30u"MIN, 表面镀金0.8u"MIN
Contact: Phosphor bronze, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 3 AMP
Raring Current: 3 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V/分钟.
Withstanding Voltage: AC 500V/Minute.
温度范围: -40° C to +105° C
Temperture Range: -40° C to +105° C


Ordering Information

F171-11 XX XX X MU X 1


NO. OF PINS PER ROW 1~40P	Contact Full Cf Gold	Plating Semi-gold	INSULATOR MATERIAL:	PACKING	TYPE1: 1	TYPE2: 2
	A0=0.8u"	B0=0.8U'	B: PA6T	A: PE Bag		
	A1=1u"	B1=1U'	C: PA6T	B: Tape & Reel		
	A2=1.5u"	B2=1.5U'	D: LCP	C: Tube		
	A3=2u"	B3=2U'		D: Tube+CAP		
	A4=3u"	B4=3U'		E: Tray		
	A5=5u"	B5=5U'				
	A6=10u"	B6=10U'				
	A7=15u"	B7=15U'				
	A8=20u"	B8=20U'				
	A9=30u"	B9=30U'				
	S1=Ordinary Tin Plated					
	S2=Matte Tin Plated					
	S3=Tin-plated High-temperature					

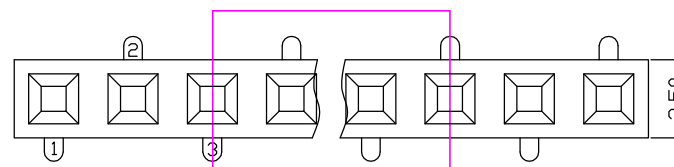

TYPE 1


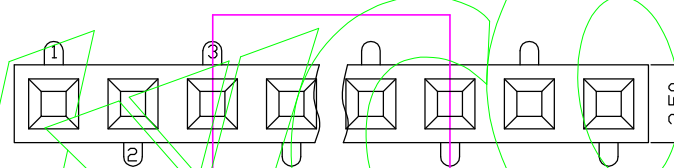


TYPE 2

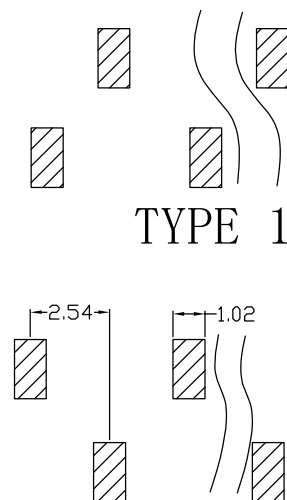

TYPE 1

TYPE 2

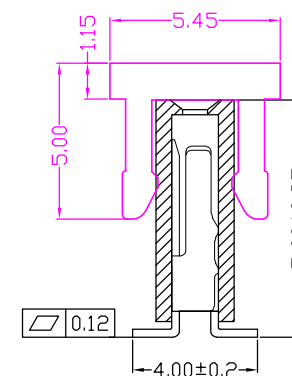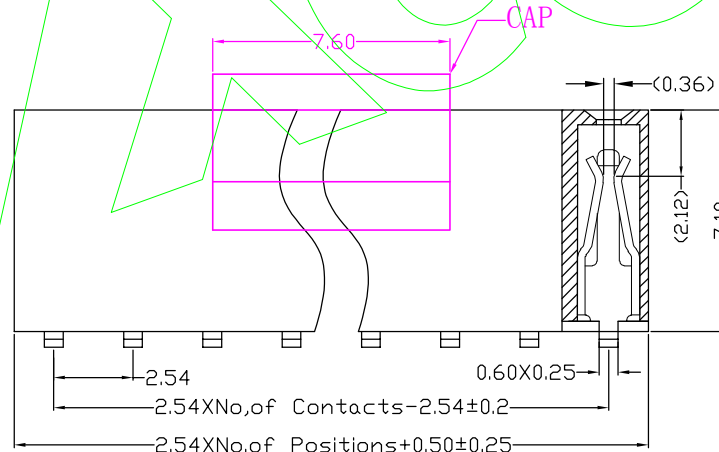


				OPERATION		SCALE		Fit		Yxcon 东莞市宇熙精密连接器有限公司			
				X.X	±0.25	UNIT		MM		www.yxcon.com Dongguan Yuxi Electronic Co., Ltd.			
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.6.26	PART NO	F171-11XXXXXXMUX1		
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE	2.54间距 塑高7.1 单排母 SMT U型		
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	Angle	±3°	PROJ.		APPROVE		Customer No.			
				DIM	TOL								

Specifications


备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.
Housing: PA6T+30%G.F UL94V-0, Color: Black
端子: 磷/青铜, 镍底30u"MIN, 表面镀金0.8u"MIN
Contact: Phosphor bronze, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 3 AMP
Raring Current: 3 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V/分钟.
Withstanding Voltage: AC 500V/Minute.
温度范围: -40° C to +105° C
Temperture Range: -40° C to +105° C

Ordering Information


F171-11 XX XX X MU X 2

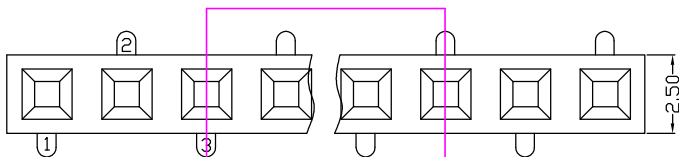

TYPE 1


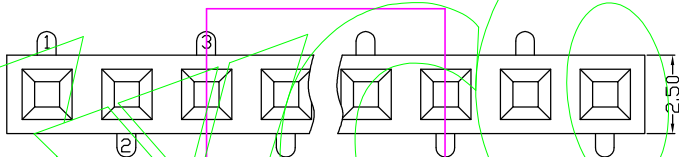


TYPE 2

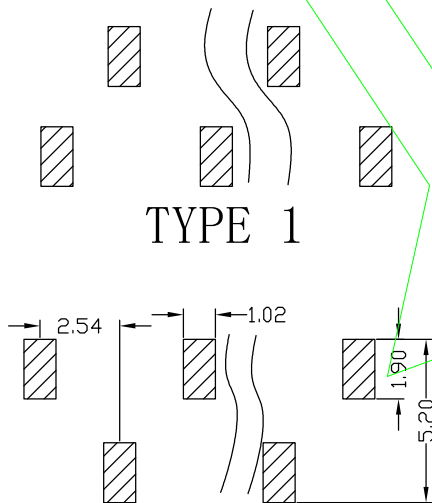

TYPE 1

TYPE 2

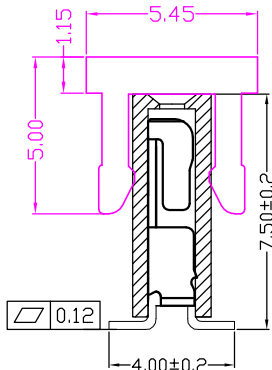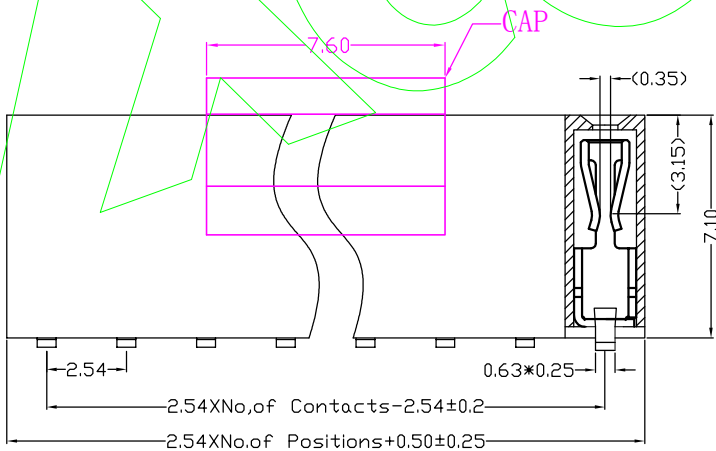

NO. OF PINS PER ROW 1~40P	Contact Full Cf Gold	Plating Semi-gold	INSULATOR MATERIAL:	PACKING	TYPE1: 1	TYPE2: 2
	A0=0.8u"	B0=0.8U'	B: PA6T	A: PE Bag		
	A1=1u"	B1=1U'	C: PA6T	B: Tape & Reel		
	A2=1.5u"	B2=1.5U'	D: LCP	C: Tube		
	A3=2u"	B3=2U'		D: Tube+CAP		
	A4=3u"	B4=3U'		E: Tray		
	A5=5u"	B5=5U'				
	A6=10u"	B6=10U'				
	A7=15u"	B7=15U'				
	A8=20u"	B8=20U'				
	A9=30u"	B9=30U'				
	S1=Ordinary Tin Plated					
	S2=Matte Tin Plated					
	S3=Tin-plated High-temperature					

				OPERATION		SCALE		Fit		 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.			
				X.X	±0.25	UNIT		MM					
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.6.26	PART NO.	F171-11XXXXXXMUX2		
				X.XXX	±0.10								
				Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.54间距 塑高7.1 单排母 SMT 0型 正反脚位		
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.			