





Specifications

备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.
Housing: PA6T+30%G.F UL94V-0, Color: Black
四方针: 黄铜, 镍底30u"MIN, 表面镀金1u"MIN
Contact: Brass, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 2 AMP
Raring Current: 2 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V/分钟.
Withstanding Voltage: AC 500V/Minute.
温度范围: -40° C to +105° C
Temperture Range: -40° C to +105° C

Ordering Information

E201-1 XX XX X R X X 1

1. LONG-EARED NO. OF PINS Contact Plating INSULATOR B: Black PAOKING
2. SHORT-EARED 6-64P Full of Gold Semi-gold MATERIAL: G: Grey 427 A: PE Bag
A0=0.8u" B0=0.8U' B: PA6T E: Grey 413 B: Tape & Reel
A1=1u" B1=1U' C: PA6T W: White C: Tube
A2=1.5u" B2=1.5U' D: LCP U: Blue D: Tube+CAP
A3=2u" B3=2U' A4=3u" B4=3U' E: Tray
A5=5u" B5=5U' A6=10u" B6=10U'
A7=15u" B7=15U' A8=20u" B8=20U'
A9=30u" B9=30U'
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

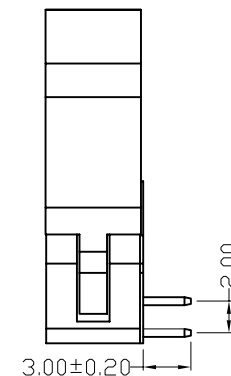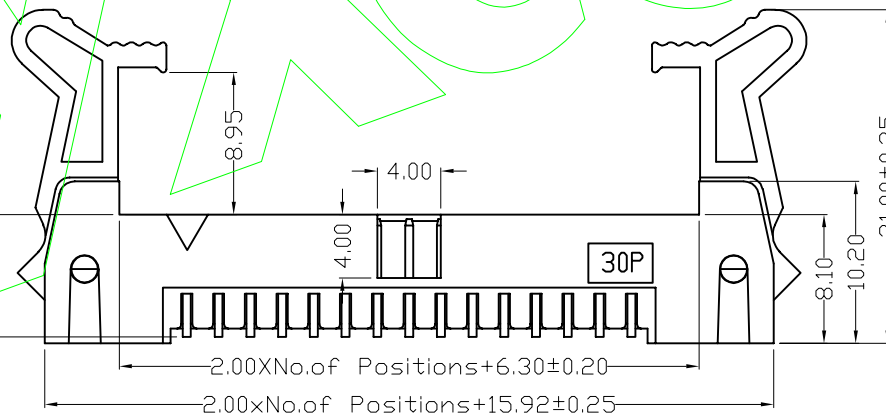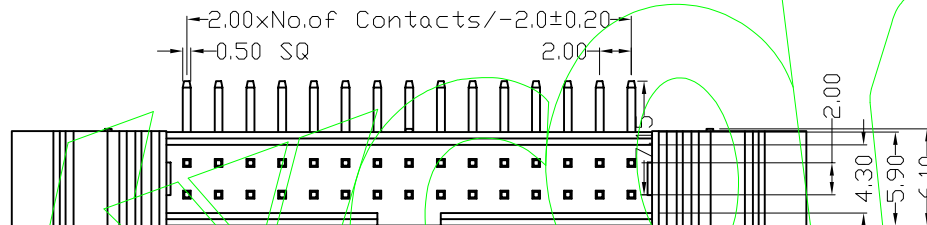

				OPERATION		SCALE		Fit	Yxcon 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co., Ltd.		
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.7.3	PART NO	E201-1XXXXXX1
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE	2.0间距 牛角 90度 长耳
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	Angle	±3°	PROJ.	APPROVE			Customer No.	
				DIM	TOL						





Specifications

备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.
Housing: PA6T+30%G.F UL94V-0, Color: Black
四方针: 黄铜, 镍底30u"MIN, 表面镀金1u"MIN
Contact: Brass, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 2 AMP
Raring Current: 2 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V/分钟.
Withstanding Voltage: AC 500V/Minute.
温度范围: -40° C to +105° C
Temperture Range: -40° C to +105° C

Ordering Information

E202-1 XX XX X R X X 1

1. LONG-EARED NO. OF PINS Contact Plating INSULATOR B: Black PAOKING
2. SHORT-EARED 6-64P Full of Gold Semi-gold MATERIAL: G: Grey 427 A: PE Bag
A0=0.8u" B0=0.8U" B: PA6T E: Grey 413 B: Tape & Reel
A1=1u" B1=1U" C: PA6T W: White C: Tube
A2=1.5u" B2=1.5U" D: LCP U: Blue D: Tube+CAP
A3=2u" B3=2U" E: Tray
A4=3u" B4=3U"
A5=5u" B5=5U"
A6=10u" B6=10U"
A7=15u" B7=15U"
A8=20u" B8=20U"
A9=30u" B9=30U"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

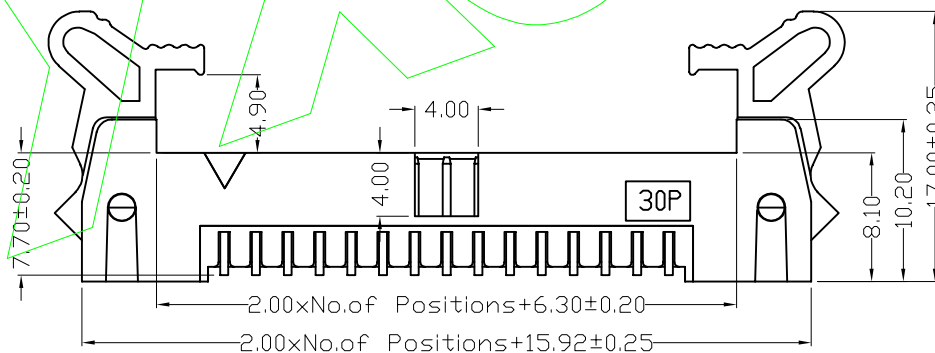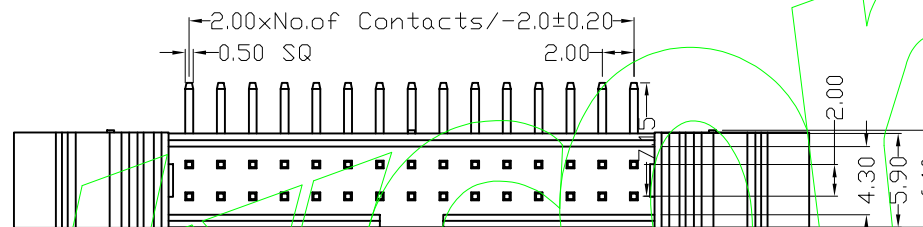

				OPERATION		SCALE		Fit	Yxcon 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co., Ltd.		
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.7.3	PART NO.	E202-1XXXXRXX1
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.0间距 牛角 90度 短耳
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	Angle	±3°	PROJ.	APPROVE			Customer No.	
				DIM	TOL						

备注(Remark)

1. 材料(MATERIAL)

胶芯: LCP+30%G.F UL94V-0, 颜色: 黑色.

Housing:LCP+30%G.F UL94V-0, Color:Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金1u"MIN


Contact:Brass, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

额定电流: 2 AMP
 Rating Current: 2 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V/分钟.
 Withstanding Voltage: AC 500V/Minute.
 温度范围: -40° C to +105° C
 Temperature Range: -40° C to +105° C

E208-1 XX XX X R X X 1

NQ CF PINS	Contact	Plating	INSULATOR	Bleack	PACKING
6-64P	Full of Gal d	Sent-gol d	MATERIAL:	G Grey427	A: PE Bag
	A0=0.8u"	B0=0.8U'	D LCP	E: Grey413	B: Tape & Abel
	A1=1u"	B1=1U'		W White	C Tube
	A2=1.5u"	B2=1.5U'		U Blue	D Tube+CAP
	A3=2u"	B3=2U'			E: Tray
	A4=3u"	B4=3U'			
	A5=5u"	B5=5U'			
	A6=10u"	B6=10U'			
	A7=15u"	B7=15U'			
	A8=20u"	B8=20U'			
	A9=30u"	B9=30U'			
	S1=O of nary	Ti n Pl ated			
	S2=Matte	Ti n Pl ated			
	S3=Ti n-pl ated	H gh-temper at ure			

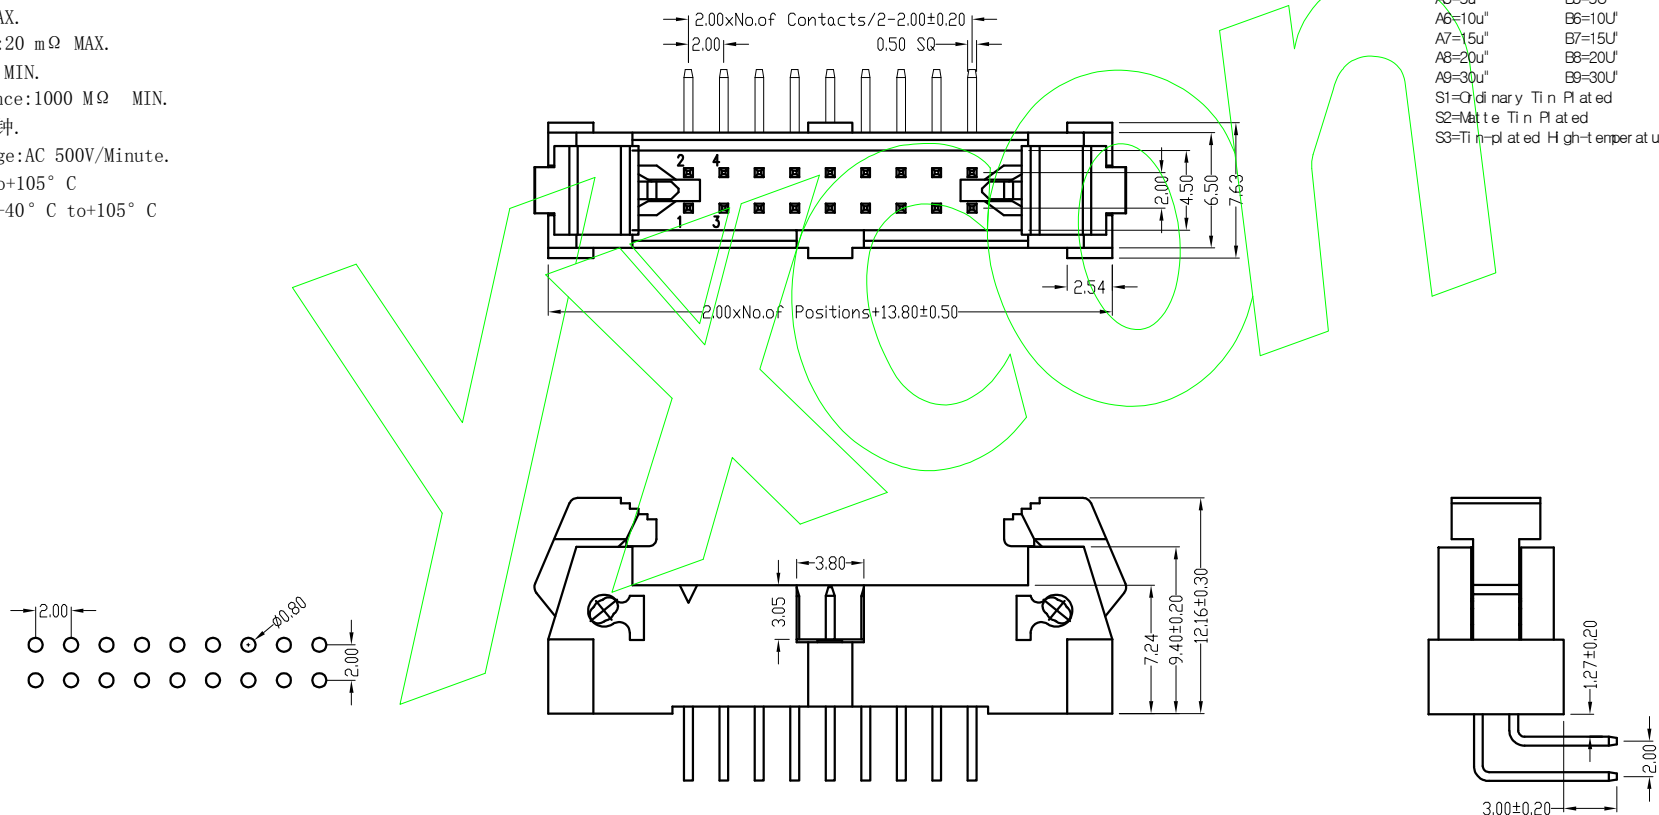


				OPERATION		SCALE		Fit	 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.7.3	PART NO	E208-1XXXXXXX1
				X.XXX	±0.10						
				Angle	±3°	SHEET	1/1	CHECK		TITLE	2.0间距 牛角 90度 防AMP
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.	

Specifications

备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.
Housing: PA9T+30%G.F UL94V-0, Color: Black
四方针: 黄铜, 镍底30u"MIN, 表面镀金1u"MIN
Contact: Brass, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
额定电流: 2 AMP
Raring Current: 2 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V/分钟.
Withstanding Voltage: AC 500V/Minute.
温度范围: -40° C to +105° C
Temperture Range: -40° C to +105° C

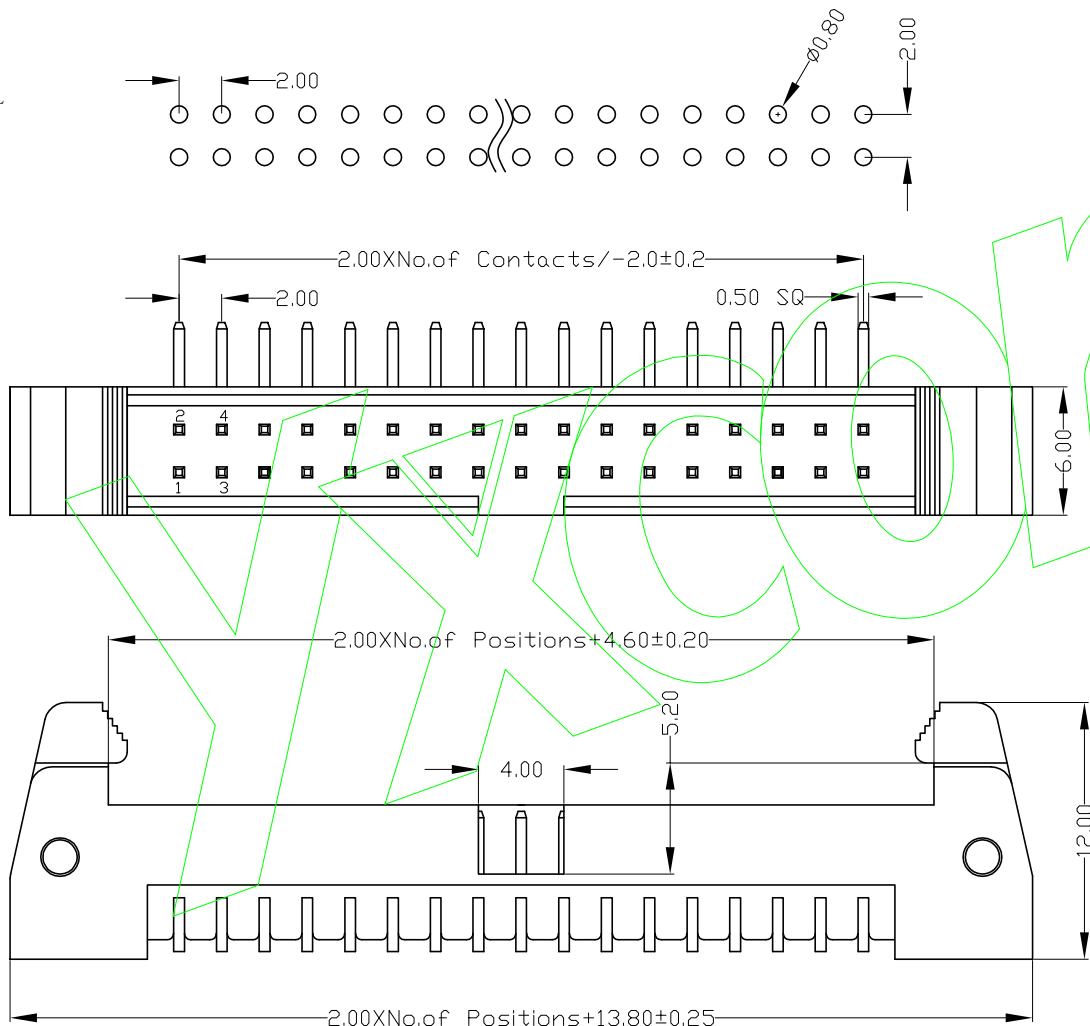

Ordering Information

E212-1 XX XX X R X X 1

NO. OF PINS 6-64P Full of Gold Contact Plating Semi-gold MATERIAL: B: PA6T C: PA9T D: LCP B: Black E: Grey413 A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray

INSULATOR: B: PA6T C: PA9T D: LCP B: Black E: Grey413 A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray

PAQING: A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray

Plating: A0=0.8u" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"

Plating: A0=0.8u" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"

Plating: S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature

				OPERATION		SCALE		Fit		Yxcon 东莞市宇熙精密连接器有限公司			
				X.X	± 0.25	UNIT		MM		www.yxcon.com Dongguan Yuxi Electronic Co., Ltd.			
				X.XX	± 0.20	SIZE	A4	DESIGN	周芳杰 2021.7.3	PART NO	E212-1XXXXRXX1		
				X.XXX	± 0.10	SHEET	1/1	CHECK		TITLE	2.0间距 牛角 90度 短耳扣		
				Angle	$\pm 3^\circ$	PROJ.	ϕ	APPROVE		Custoner No.			
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION				DI M	TOL					