

Ordering Information

B257-1 XX XX X S X X 1

备注(Remark)

1. 材料 (MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.

Housing:PA9T+30%G. F UL94V-0, Color:Black

四方针：磷青铜，镍底50u"MIN, 表面镀半金高温雾锡0.8u"MIN

Contact: Phosphorous bronze, 0.8u" MIN Semi-gold High Temperature Fog Tin
50u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current:2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance:1000 MΩ MIN.

耐电压: AC 1000V/分钟.

Withstanding Voltage:AC 1000V/Minute.

温度范围: -40°C to $+105^{\circ}\text{C}$

Temperture Range: -40° C to+105° C

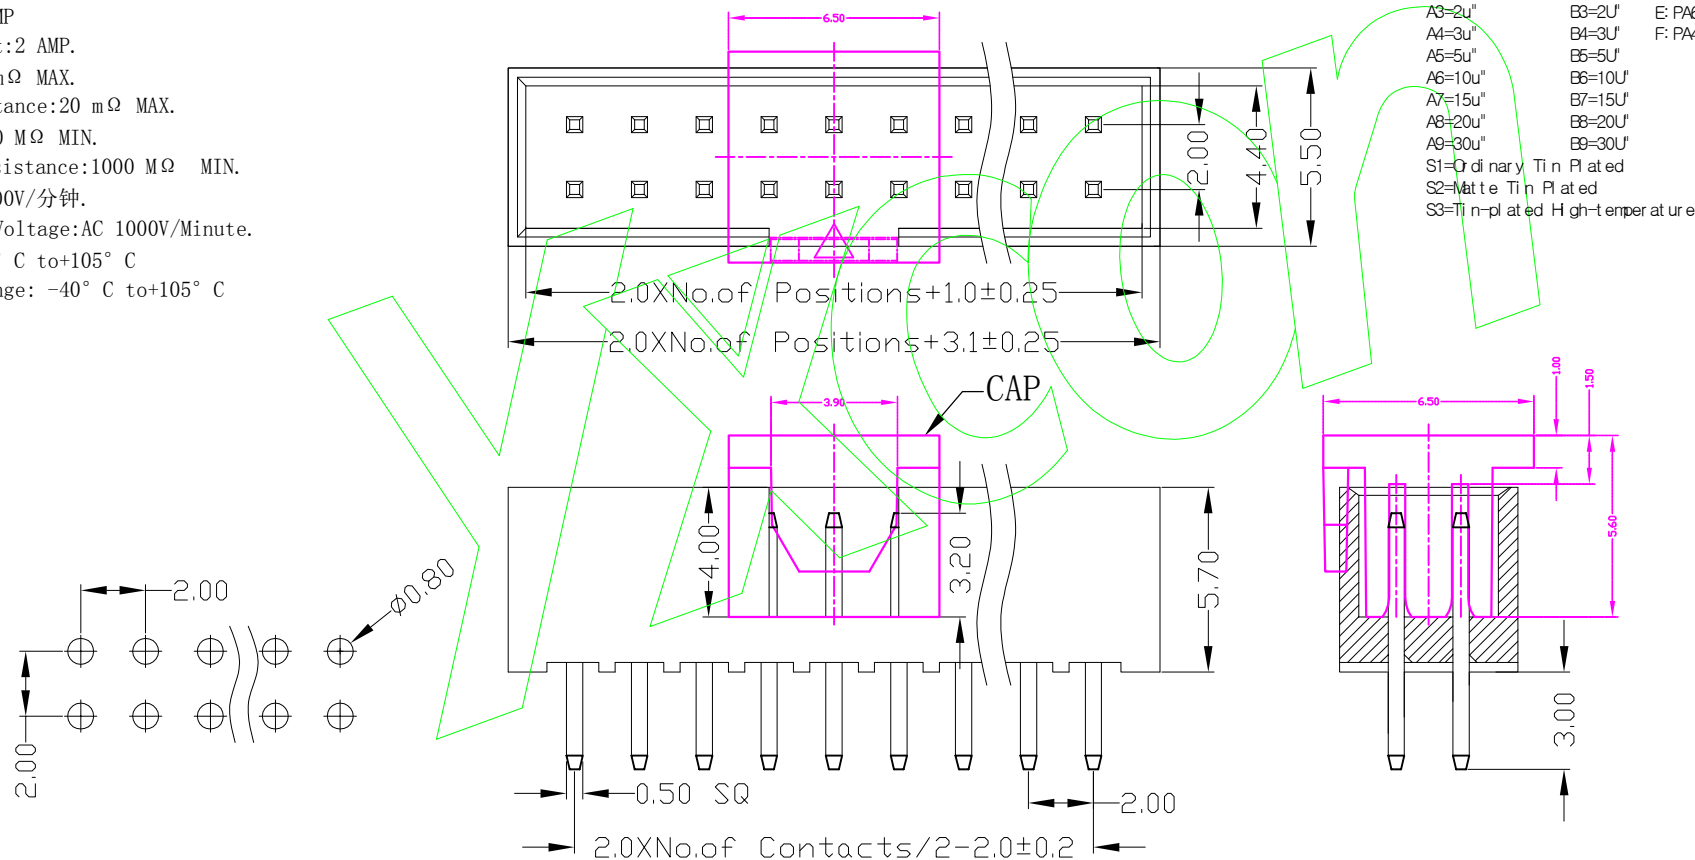

				OPERATION		SCALE		Fit		Yxcon 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.7.2	PART NO	B257-1XXXXXX1	
				X.XXX	±0.10							
				Angle	±3°	SHEET	1/1	CHECK		TITLE	2.0间距 筒牛 塑高5.7 180度	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.		