

Ordering Information

1. 材料 (MATERIAL)

Housing:PA9T+30%G. F UL94V-0, Color:Black

四方针：黄铜，镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Raring Current:3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance:1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage:AC 500V/minute.

温度范围: -40°C to $+105^{\circ}\text{C}$

Temperture Range: -40° C to+105° C

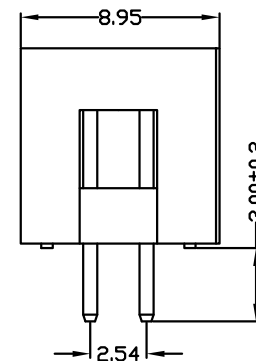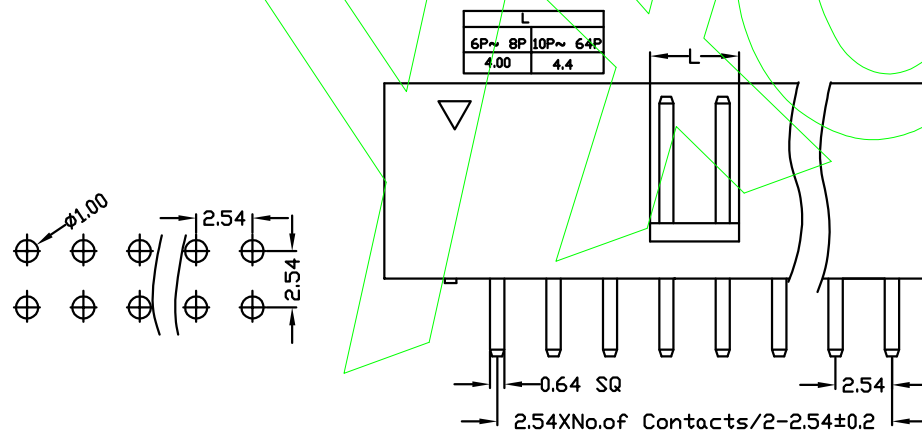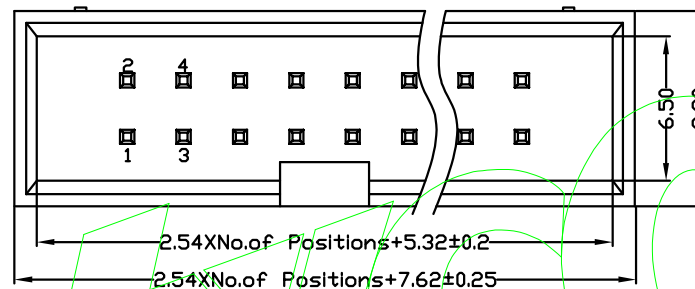

NQ OF PINS	Contact	Plating	INSULATOR	Black	PAKING
6-64P	Ful Cr Gold	Semi-gold	MATERIAL:	G Grey427	A: PE Bag
	A0=0, 8u"	B0=0, 8U"	A: PBT	E: Grey413	B: Tape & Reel
	A1=1u"	B1=1U"	B: PA6T	WWhite	C: Tube
	A2=1, 5u"	B2=1, 5U"	C: PA9T	U: Blue	D: Tube+CAP
	A3=2U"	B3=2U"	D: LCP		E: Tray
	A4=3u"	B4=3U"			
	A5=5u"	B5=5U"			
	A6=10u"	B6=10U"			
	A7=15u"	B7=15U"			
	A8=20u"	B8=20U"			
	A9=30u"	B9=30U"			
	S1=Ordinary	Tin Plated			
	S2=Matte	Tin Plated			
	S3=Tin-plated	High temperature			

				OPERATION		SCALE		Fit		 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.7.2	PART NO	B190-1XXXXXSXX1	
				X.XXX	±0.10							
				Angle	±3°	SHEET	1/1	CHECK		TITLE	2.54间距 筒牛 塑高9.0 180度	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.		

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.


温度范围: -40° C to +105° C

Temperture Range: -40° C to +105° C




Ordering Information

B190-1 XX XX X R X X 1

NO. OF PINS	Contact Plating	INSULATOR MATERIAL	Back	PACKING
6-64P	Full of Gold	Semi-gold	Grey 427	A: PE Bag
A0=0.8u"	B0=0.8u"	A: PBT	E: Grey 413	B: Tape & Reel
A1=1u"	B1=1u"	B: PA6T	W: White	C: Tube
A2=1.5u"	B2=1.5u"	C: PA9T	U: Blue	D: Tube+CAP
A3=2u"	B3=2u"	D: LCP		E: Tray
A4=3u"	B4=3u"			
A5=5u"	B5=5u"			
A6=10u"	B6=10u"			
A7=15u"	B7=15u"			
A8=20u"	B8=20u"			
A9=30u"	B9=30u"			
S1=Ordinary Tin Plated				
S2=Matte Tin Plated				
S3=Tin-plated High-temperature				

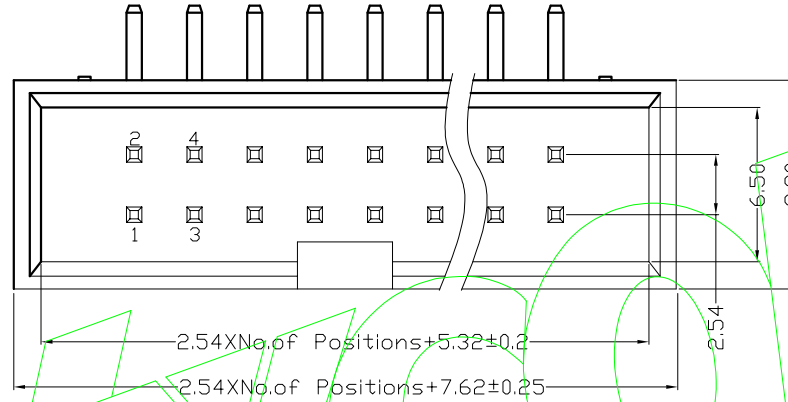

L
6P~ 8P 10P~ 64P
4.00 4.4

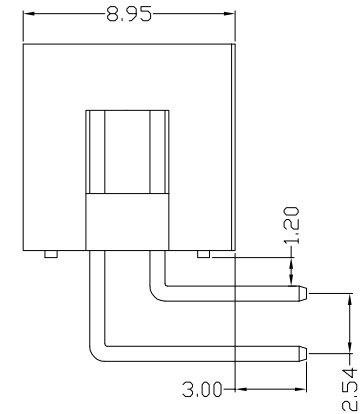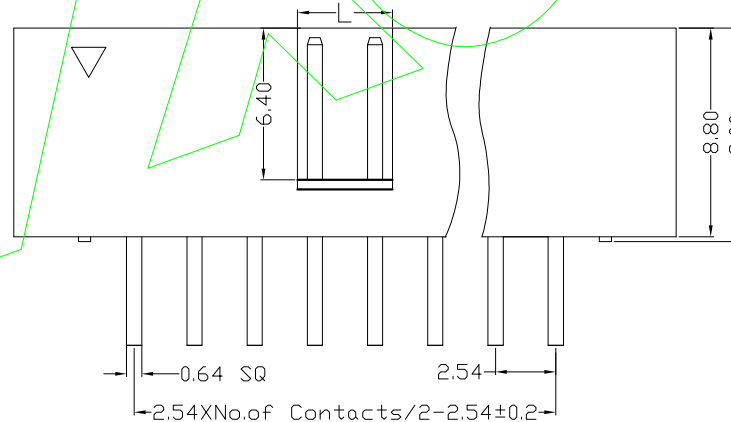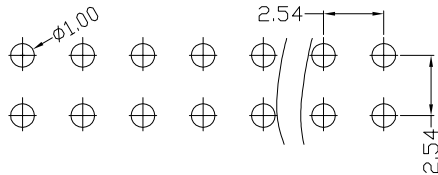

REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	OPERATION	SCALE	Fit	DESIGN	PART NO.	B190-1XXXXXX1
				X.X ±0.25	UNIT	MM	周芳杰 2021.7.2		
				X.XX ±0.20	SIZE	A4			
				X.XXX ±0.10	SHEET	1/1			
				Angle ±3°	CHECK				
				DIM TOL	PROJ.				
					APPROVE				

Yxcon 东莞市宇熙精密连接器有限公司
www.yxcon.com Dongguan Yuxi Electronic Co., Ltd.

周芳杰 2021.7.2	PART NO.	B190-1XXXXXX1
CHECK	TITLE	2.54间距 筒牛 塑高9.0 90度
APPROVE	Customer No.	

Ordering Information

B257-1 XX XX X S X X 1

备注(Remark)

1. 材料 (MATERIAL)

胶芯: PA9T+30%G. F UL94V-0, 颜色: 黑色.

Housing:PA9T+30%G.F UL94V-0,Color:Black

四方针：磷青铜，镍底50u"MIN, 表面镀半金高温雾锡0.8u"MIN

Contact: Phosphorous bronze, 0.8u" MIN Semi-gold High Temperature Fog Tin
50u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current:2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance:1000 MΩ MIN.

耐电压: AC 1000V/分钟.

Withstanding Voltage:AC 1000V/Minute.

温度范围: -40°C to $+105^{\circ}\text{C}$

Temperture Range: -40° C to+105° C

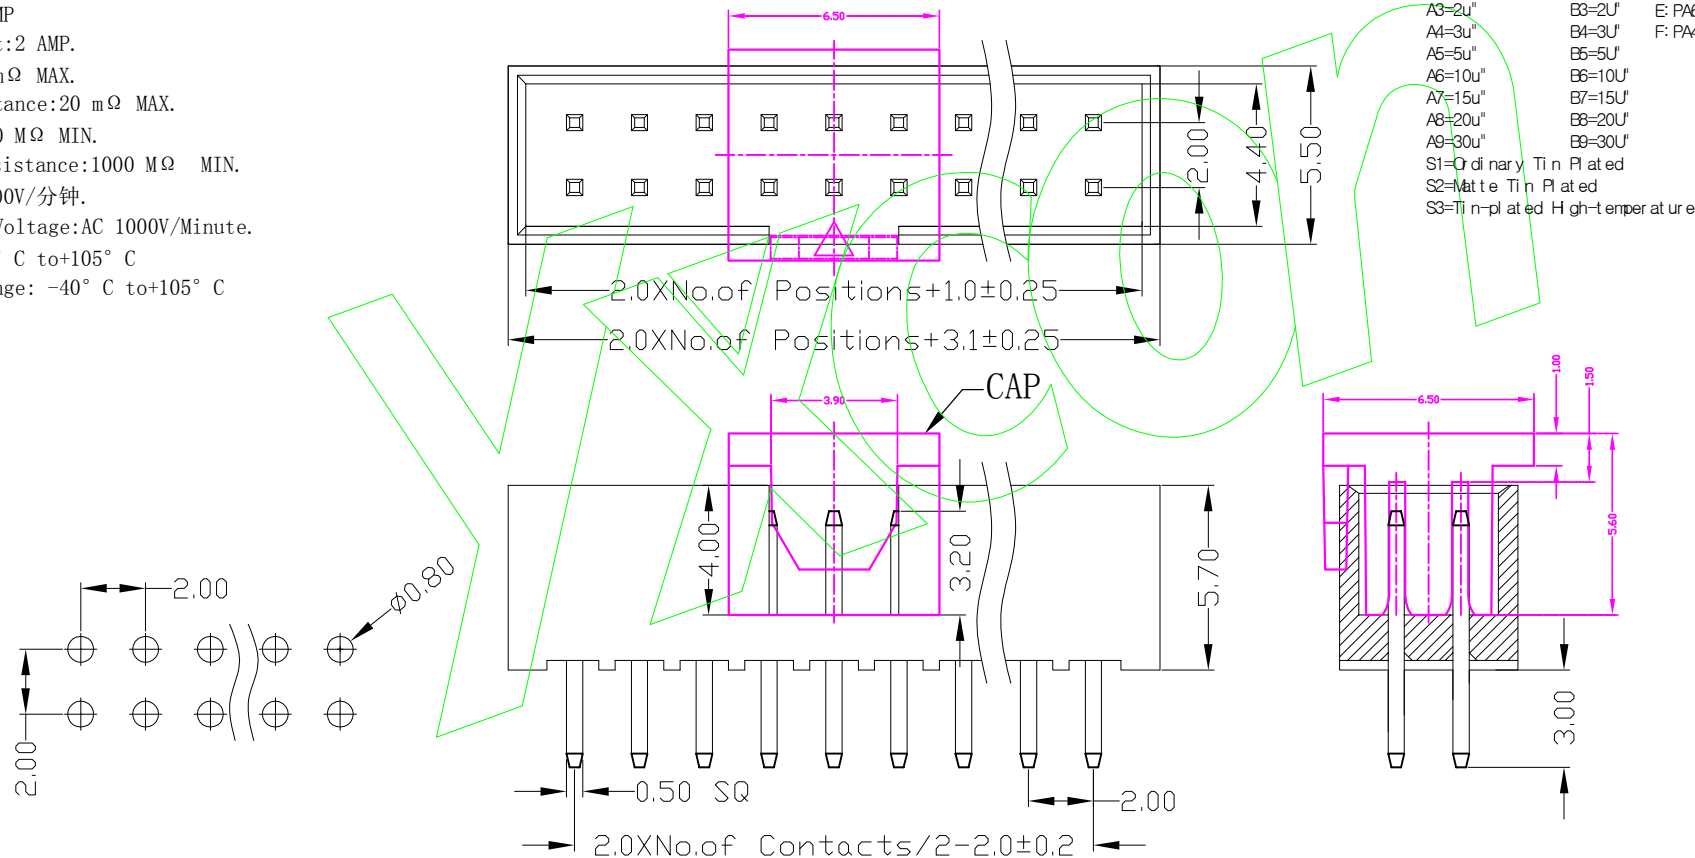

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.7.2	PART NO	B257-1XXXXXX1	
				X.XXX	±0.10							
				Angle	±3°	SHEET	1/1	CHECK		TITLE	2.0间距 筒牛 塑高5.7 180度	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.		