

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA9T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Raring Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.


温度范围: -40° C to +105° C

Temperture Range: -40° C to +105° C

Ordering Information

B198-1XX XX X S X X 1

NO OF PINS	Contact	Plating	INSULATOR	BACK	PACKING
4-100P	Full Gold	Semi-gold	MATERIAL:	Grey 427	PE Bag
	A0=0.8u"	B0=0.8u"	A: PBT	E: Grey 413	B: Tape & Reel
	A1=1u"	B1=1u"	B: PA6T	White	C: Tube
	A2=1.5u"	B2=1.5u"	C: PA9T	Blue	D: Tube+CAP
	A3=2u"	B3=2u"	D: LCP		E: Tray
	A4=3u"	B4=3u"			
	A5=5u"	B5=5u"			
	A6=10u"	B6=10u"			
	A7=15u"	B7=15u"			
	A8=20u"	B8=20u"			
	A9=30u"	B9=30u"			
	S1=Ordinary Tin Plated				
	S2=Matte Tin Plated				
	S3=Tin-plated High-temperature				

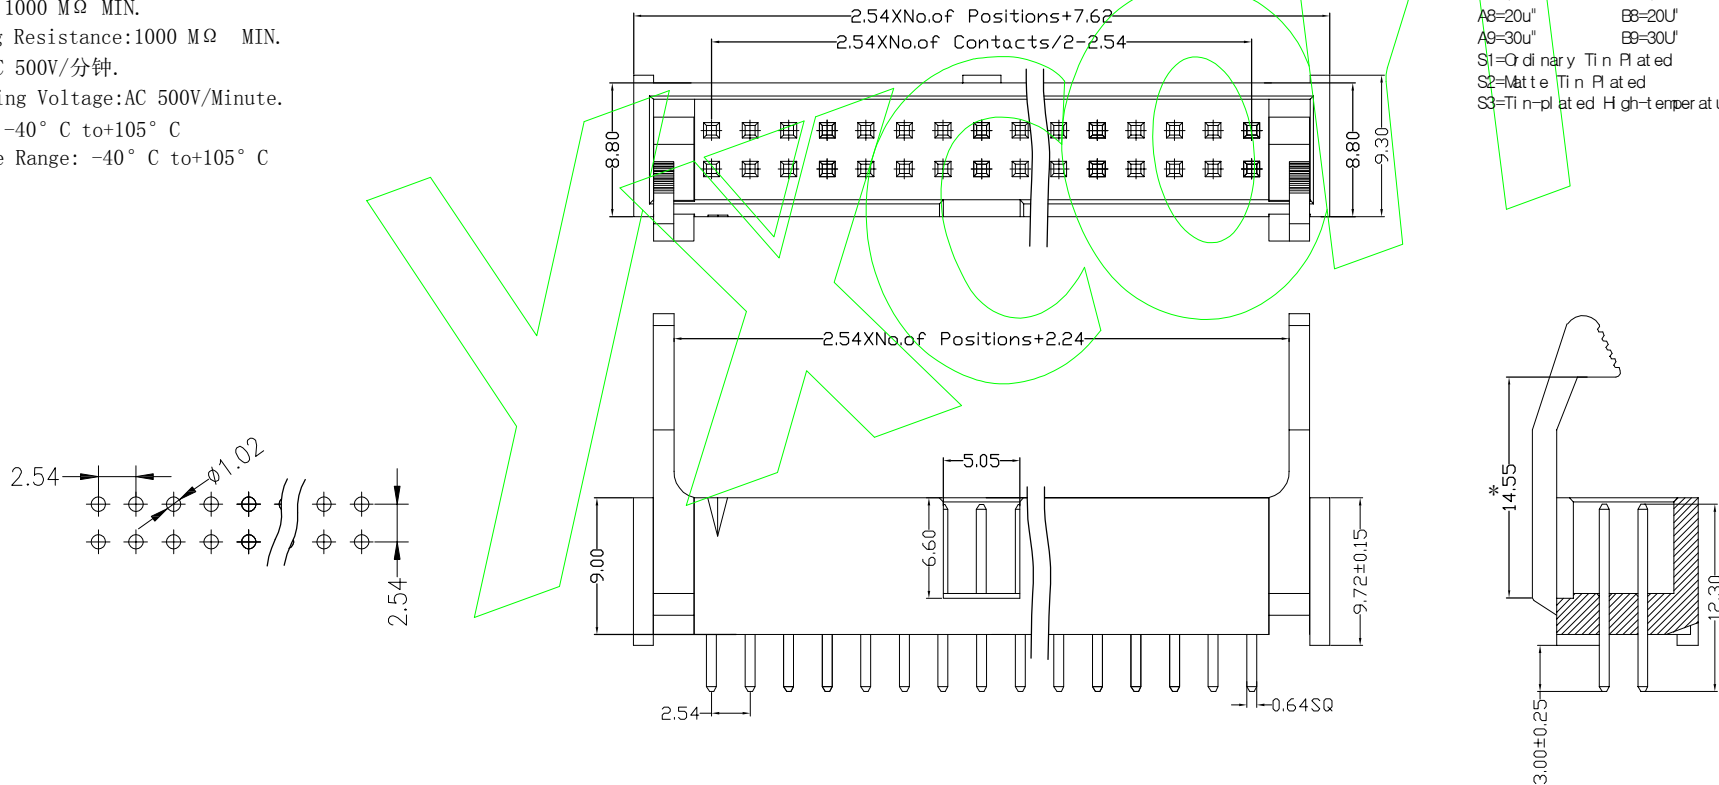

REV		DATE		MODIFICATION DESCRIPTION		CHANGE		APPROVE		OPERATION		SCALE		Fit		UNIT		SIZE		A4		DESIGN		周芳杰 2021.8.14		PART NO		TITLE		2.54 筒牛 侧面带铁钩 XPP 180度	
X.X		+0.30		X.XX		+0.20		X.XXX		+0.10		Angle		+3°		DIM		TOL		SHEET		1/1		CHECK		PRQJ.		APPROVE		Customer No.	
1		2		3		4		5		6		7		8		9		10		11		12		13		14		15		16	

Yxcon 东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co., Ltd.