

Specifications

备注(Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing:PA6T+30%G. F UL94V-0, Color:Black

四方针：黄铜，镍底30u"MIN, 表面镀金1u"MIN

Contact: Brass, 1u" MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current:2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance:1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage:AC 500V/Minute.


温度范围: -40°C to $+105^{\circ}\text{C}$

Temperture Range: -40° C to+105° C

Ordering Information

E201-1 XX XX X S X X 1

1. LONG-EARED	NQ OF PINS	Contact	Plating	INSULATOR	B Back	PACKING
2. SHORT-EARED	6-64P	Full Contact	Semi-gold	MATERIAL:	G Grey427	A PE Bag
		A0=0.8u"	B0=0.8U'	B PA6T	E Grey413	B Tape & Reel
		A1=1u"	B1=1U'	C PA9T	W White	C Tube
		A2=1.5u"	B2=1.5U'	D LCP	U Blue	D Tube+CAP
		A3=2u"	B3=2U'			E Tray
		A4=3u"	B4=3U'			
		A5=5u"	B5=5U'			
		A6=10u"	B6=10U'			
		A7=15u"	B7=15U'			
		A8=20u"	B8=20U'			
		A9=30u"	B9=30U'			
		S1=Q of binary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

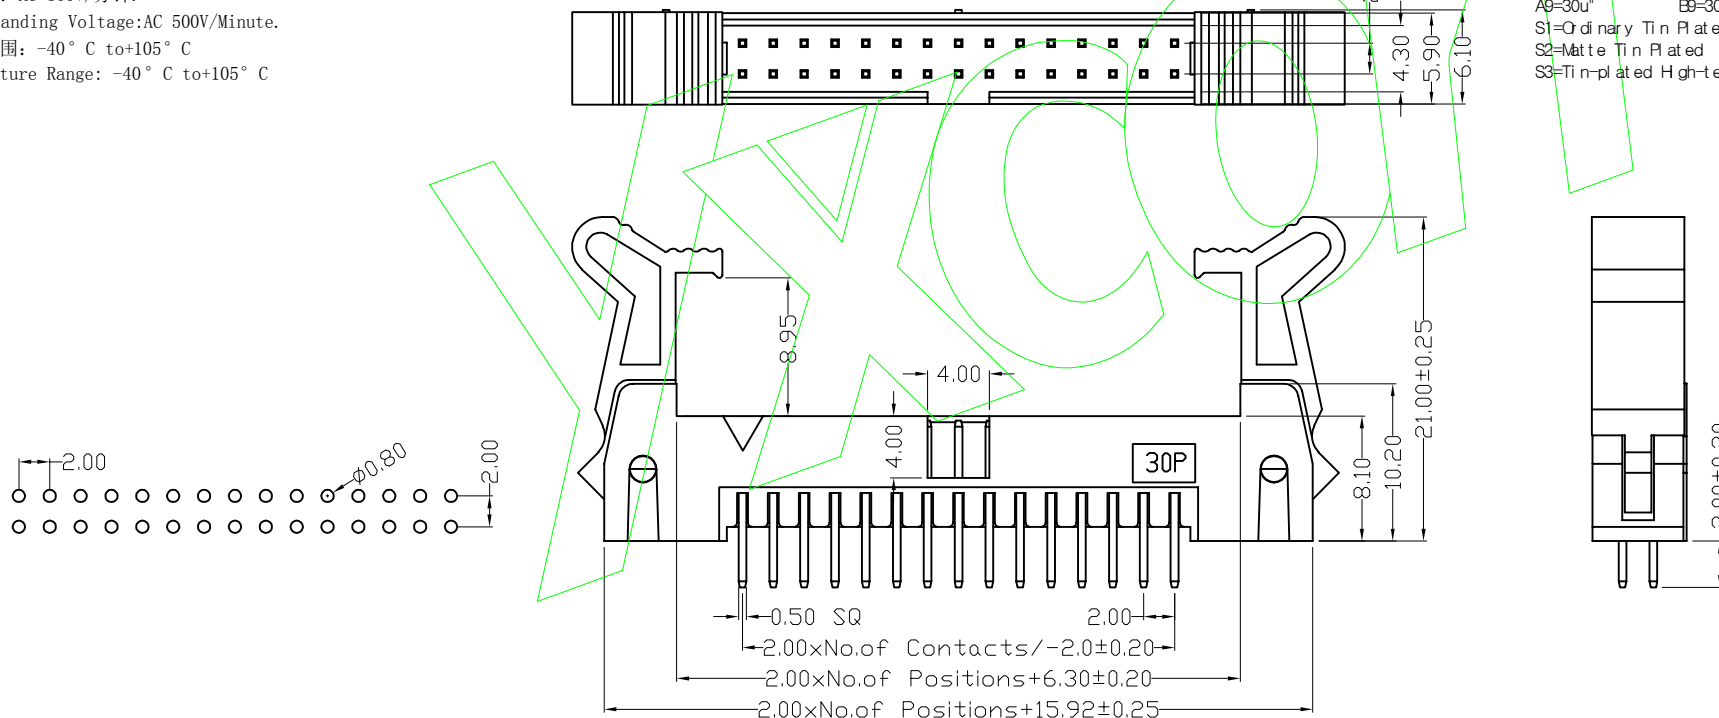

				OPERATION		SCALE		Fit	 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.7.3	PART NO	E201-1XXXXXSXX1
				X.XXX	±0.10						
				Angle	±3°	SHEET	1/1	CHECK		TITLE	2.0间距 牛角 180度 长耳
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.	

Specifications

备注(Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing:PA6T+30%G.F UL94V-0,Color:Black

四方针：黄铜，镍底30u"MIN, 表面镀金1u"MIN

Contact:Brass, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current:2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance:20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance:1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage:AC 500V/Minute.


温度范围: -40°C to $+105^{\circ}\text{C}$

Temperature Range: -40°C to $+105^{\circ}\text{C}$

Ordering Information

E202-1 XX XX X S X X 1



1. LONG-EARED	NQ. OF PINS	Contact	Plating	INSULATOR	Back	PACKING
2. SHORT-EARED	6-64P	Full of Gold	Semi-gold	MATERIAL:	Grey427	PE Bag
		A0=0.8u"	B0=0.8u"	B PA6T	Grey413	B Tape & Rbel
		A1=1u"	B1=1U"	C PA9T	WWite	C Tube
		A2=1.5u"	B2=1.5U"	D LCP	U: B ue	D Tube+CAP
		A3=2u"	B3=2U"			E Tray
		A4=3u"	B4=3U"			
		A5=5u"	B5=5U"			
		A6=10u"	B6=10U"			
		A7=15u"	B7=15U"			
		A8=20u"	B8=20U"			
		A9=30u"	B9=30U"			
		S1=Ordinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

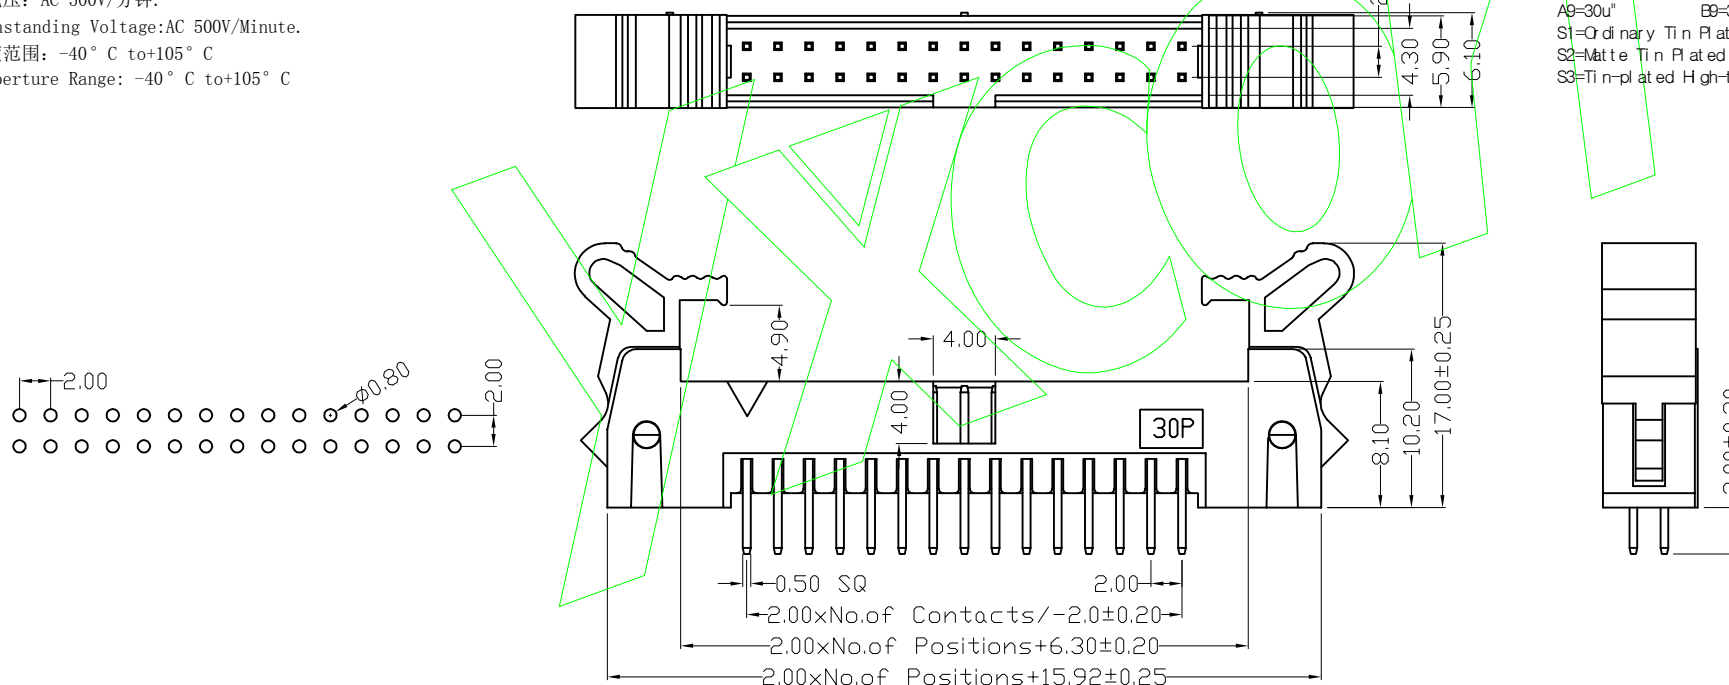

				OPERATION		SCALE		Fit	 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.7.3	PART NO	E202-1XXXXXSXX1
				X.XXX	±0.10						
				Angle	±3°	SHEET	1/1	CHECK		TITLE	2.0间距 牛角 180度 短耳
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.	

Ordering Information
E201-2 XX XX X S X X 1

30u" MIN NICKEL UNDERPLATING OVER ALL

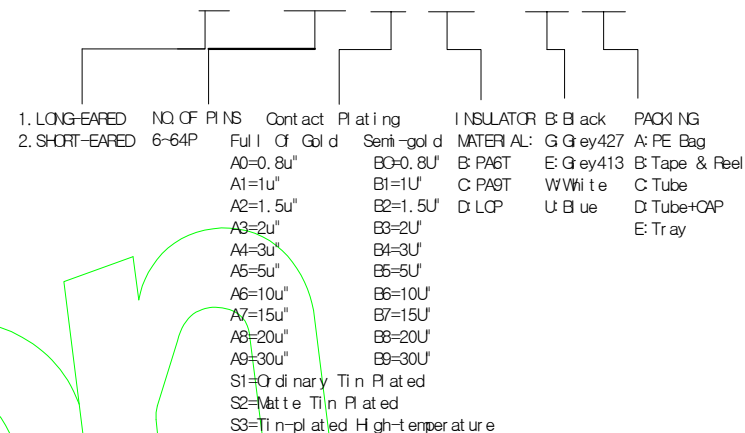
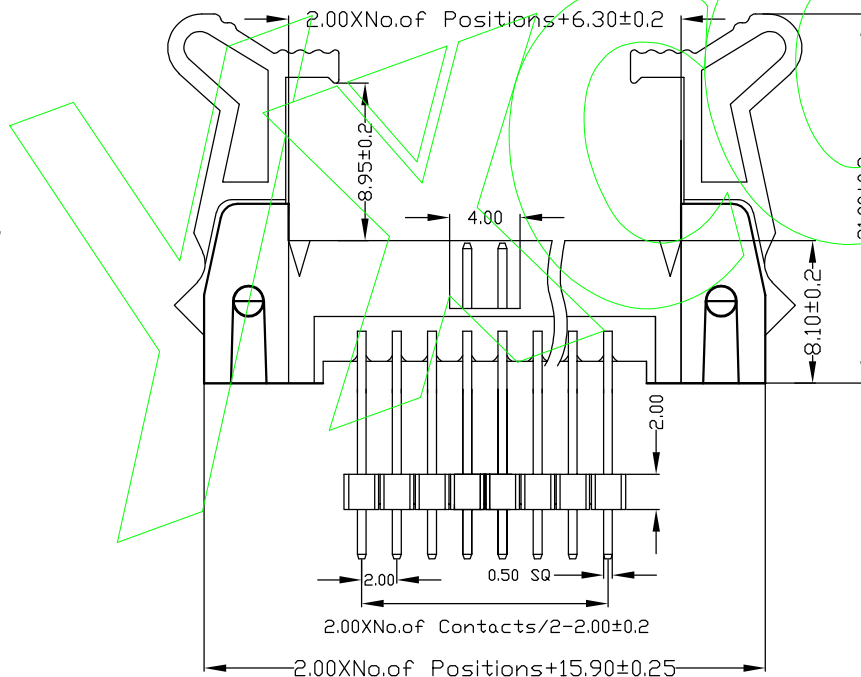
Temperature Range: -40°C to $+105^{\circ}\text{C}$ 

				OPERATION		SCALE		Fit	 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.7.3	PART NO	E201-2XXXXXXSXX1
				X.XXX	±0.10						
				Angle	±3°	SHEET	1/1	CHECK		TITLE	2.0间距 牛角 180度 长耳 多塑
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.	

Ordering Information
E202-2 XX XX X S X X 1

30u" MIN NICKEL UNDERPLATING OVER ALL

Temperture Range: -40° C to+105° C

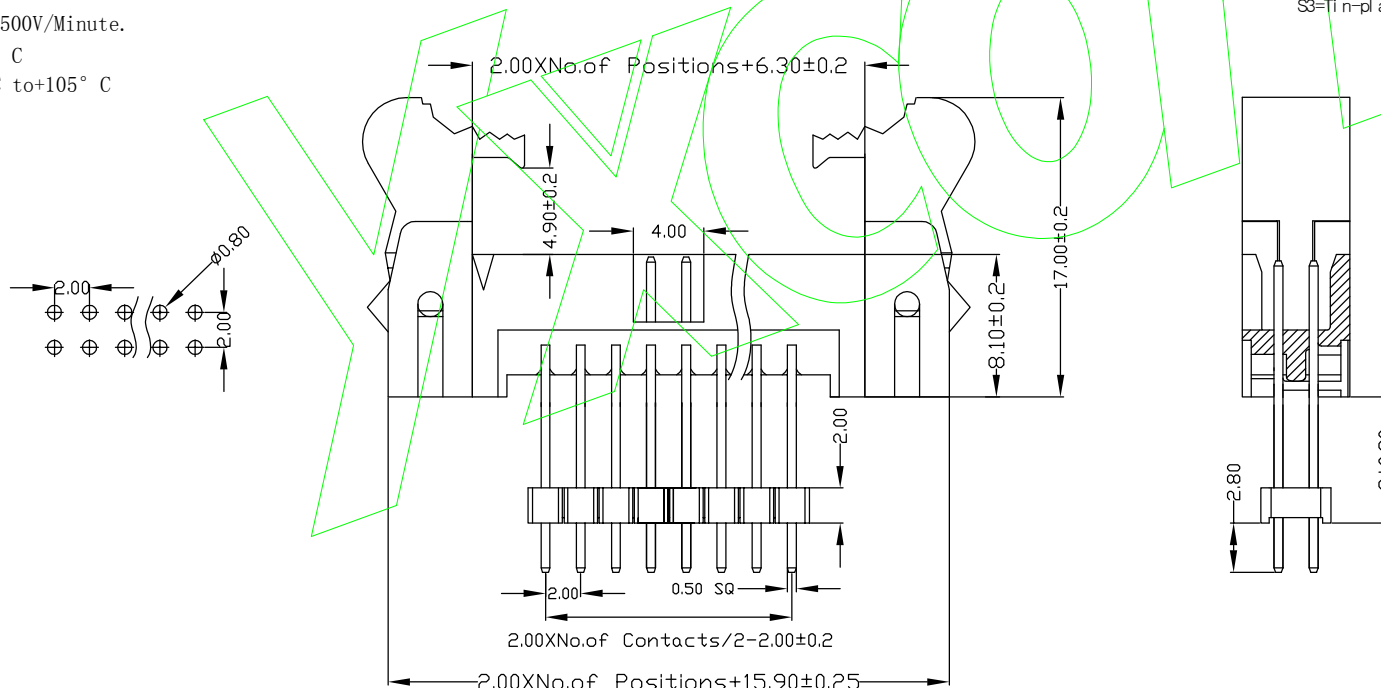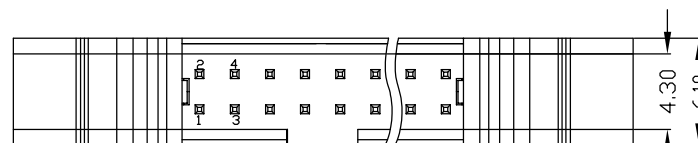

1. LONG-EARED	NQ OF PINS	Contact	Plating	INSULATOR	B: Back	PACKING
2. SHORT-EARED	6-64P	Full of Gold	Semi-gold	MATERIAL:	G Grey427	A: PE Bag
		A0=0.8u"	B0=0.8U"	B: PA6T	E: Grey413	B: Tape & Reel
		A1=1u"	B1=1U"	C: PA9T	WWhite	C: Tube
		A2=1.5u"	B2=1.5U"	D: LCP	U: Blue	D: Tube+CAP
		A3=2u"	B3=2U"			E: Tray
		A4=3u"	B4=3U"			
		A5=5u"	B5=5U"			
		A6=10u"	B6=10U"			
		A7=15u"	B7=15U"			
		A8=20u"	B8=20U"			
		A9=30u"	B9=30U"			
		S1=Ordinary	Tin Plated			
		S2=Matte	Tin Plated			
		S3=Tin-plated	High temperature			

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd. www.yxcon.com		
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.7.3	PART NO	E202-2XXXXXXSX1	
				X.XXX	±0.10							
				Angle	±3°	SHEET	1/1	CHECK		TITLE	2.0间距 牛角 180度 短耳 多塑	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.		

Specifications

备注 (Remark)
1. 材料 (MATERIAL)
胶芯: LCP+30%G.F UL94V-0, 颜色: 黑色.
Housing: LCP+30%G.F UL94V-0, Color: Black
四方针: 黄铜, 镍底30u"MIN, 表面镀金1u"MIN
Contact: Brass, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
额定电流: 2 AMP
Raring Current: 2 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V/分钟.
Withstanding Voltage: AC 500V/Minute.
温度范围: -40° C to +105° C
Temperture Range: -40° C to +105° C

Ordering Information

E208-1 XX XX X S X X 1





NO. OF PINS 6-64P
Full of Gold
A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin plated High-temperature

Contact Plating
Semi-gold
B0=0.8u"
B1=1u"
B2=1.5u"
B3=2u"
B4=3u"
B5=5u"
B6=10u"
B7=15u"
B8=20u"
B9=30u"

INSULATOR MATERIAL: D LCP
GRAY 427
E: Gray 413
U: Blue

BACK
GRAY 427
E: Gray 413
U: Blue

PACKING
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

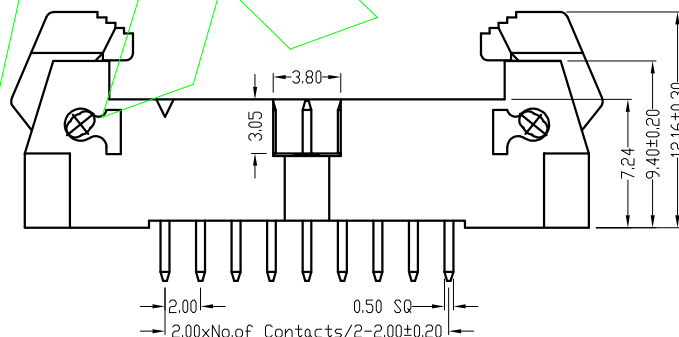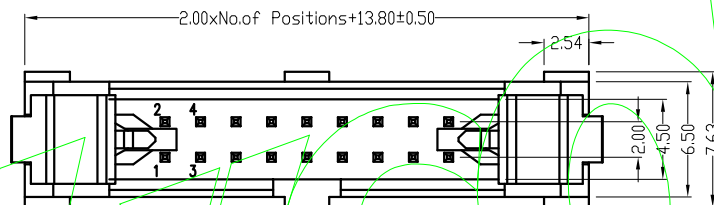


				OPERATION		SCALE		Fit		Yxcon 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.7.3	PART NO	E208-1XXXXXSX1	
				X.XXX	±0.10							
				Angle	±3°	SHEET	1/1	CHECK		TITLE	2.0间距 牛角 180度 防AMP	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.		

E212-1 XX XX X S X X 1

30u" MIN NICKEL UNDERPLATING OVER ALL

Temperture Range: -40° C to+105° C

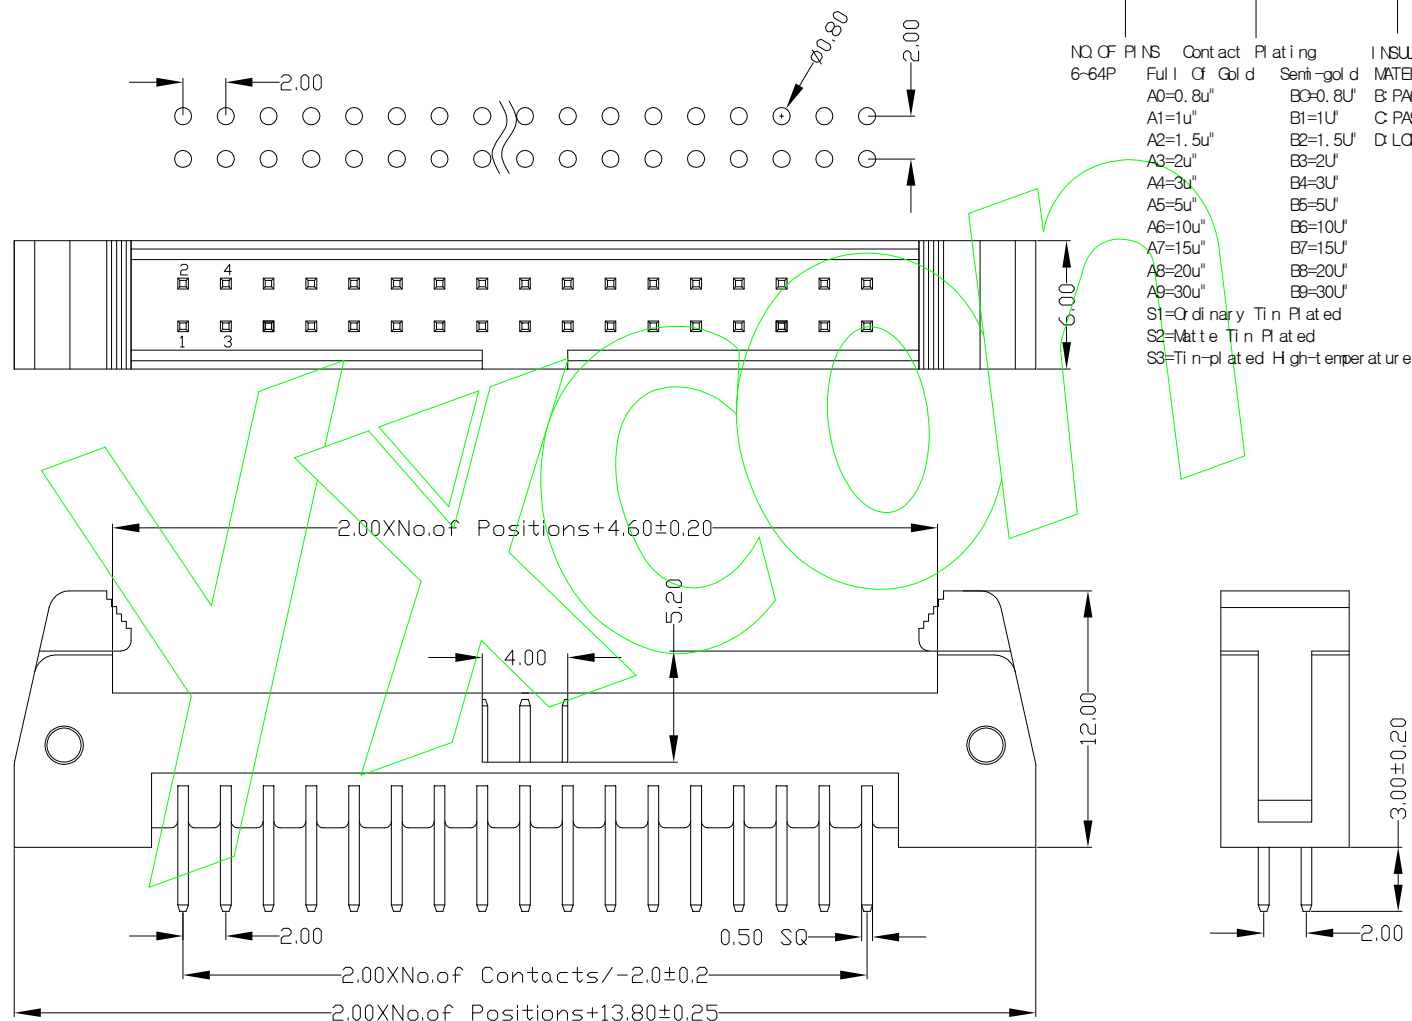

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.				
				X.X	±0.25	UNIT		MM						
				X.XX	±0.20	SIZE		A4		DESIGN		周芳杰 2021.7.3	PART NO	E212-1XXXXXXX1
				X.XXX	±0.10	SHEET		1/1		CHECK			TITLE	2.0间距 牛角 180度 短耳扣
				Angle	±3°	PROJ.				APPROVE			Customer No.	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL									

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.

Housing:PA6T/PBT+30%G. F UL94V-0, Color:Black

四方针：黄铜，镍底30u"MIN, 表面镀金1u"MIN

Contact: Brass, 1u" MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current:2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance:1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage:AC 500V/Minute.


温度范围: -40°C to $+105^{\circ}\text{C}$

Temperture Range: -40° C to+105° C

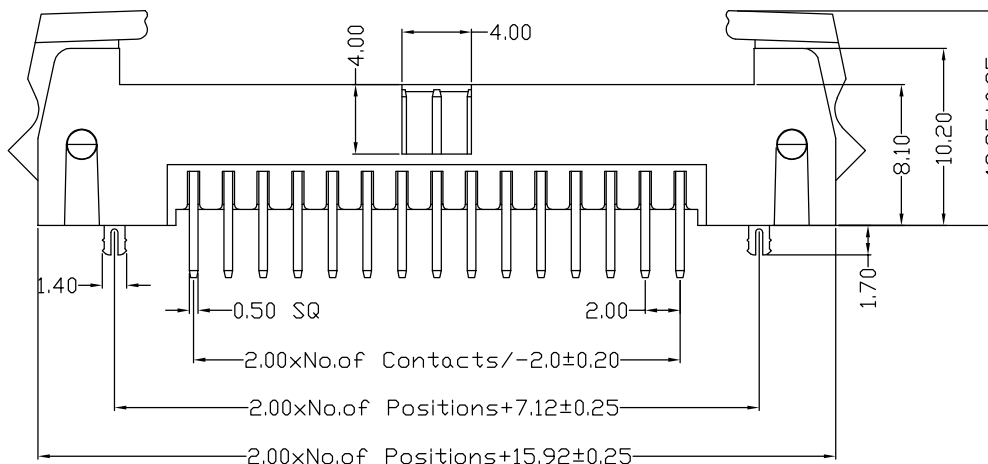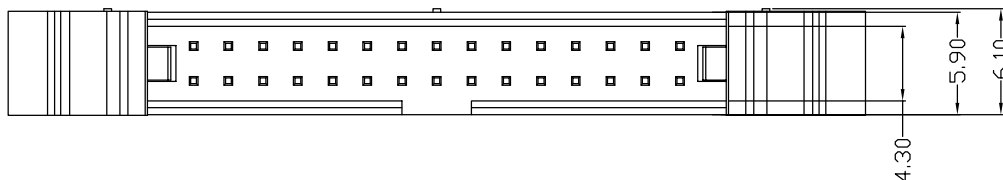

Ordering Information

E20X-1 XX XX X S X X 3

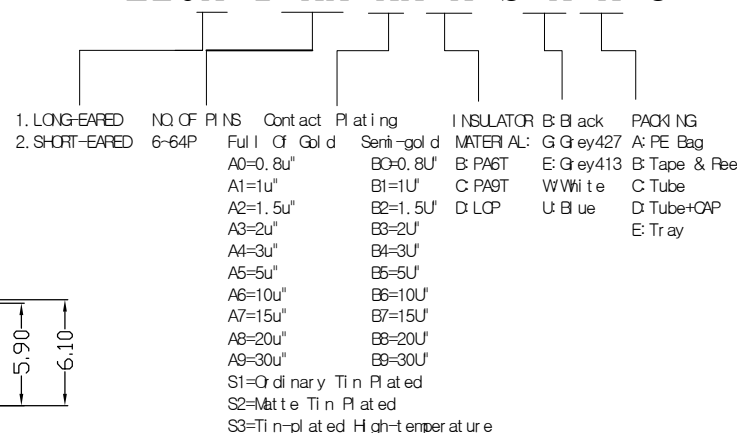

				OPERATION		SCALE		Fit	 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	秦星宇 2021.07.22	PART NO	E20X-1XXXXXX3
				X.XXX	±0.10						
				Angle	±3°	SHEET	1/1	CHECK		TITLE	2.0mm 牛角 180度 短耳牛角 带鱼叉
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.	