

# Specifications


备注 (Remark)  
 1. 材料 (MATERIAL)  
 胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.  
 Housing: PA9T+30%G.F UL94V-0, Color: Black  
 四方针: 黄铜, 镍底30u"MIN, 表面镀半金高温雾锡10u"MIN  
 Contact: Brass, 10u"MIN GOLD PLATING OVER ALL  
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):  
 额定电流: 3 AMP  
 Rating Current: 3 AMP.  
 接触阻抗: 20 mΩ MAX.  
 Contact Resistance: 20 mΩ MAX.  
 绝缘阻抗: 1000 MΩ MIN.  
 Insulating Resistance: 1000 MΩ MIN.  
 耐电压: AC 500V/分钟.  
 Withstanding Voltage: AC 500V/Minute.  
 温度范围: -40° C to+105° C  
 Temperature Range: -40° C to+105° C

# Ordering Information

B190-2 XX XX X S X X 1

NO. OF PINS	Contact Plating	INSULATOR	BACK	PACKING
6-64P	Full of Gold	Semi-gold	MATERIAL:	Grey427
	A0=0.8u"	B0=0.8U'	A: PBT	E: Grey413
	A1=1u"	B1=1U'	B: PA6T	W: White
	A2=1.5u"	B2=1.5U'	C: PA9T	U: Blue
	A3=2u"	B3=2U'	D: LCP	
	A4=3u"	B4=3U'		
	A5=5u"	B5=5U'		
	A6=10u"	B6=10U'		
	A7=15u"	B7=15U'		
	A8=20u"	B8=20U'		
	A9=30u"	B9=30U'		
	S1=Ordinary Tin Plated			
	S2= Matte Tin Plated			
	S3= Tin-plated High temperature			

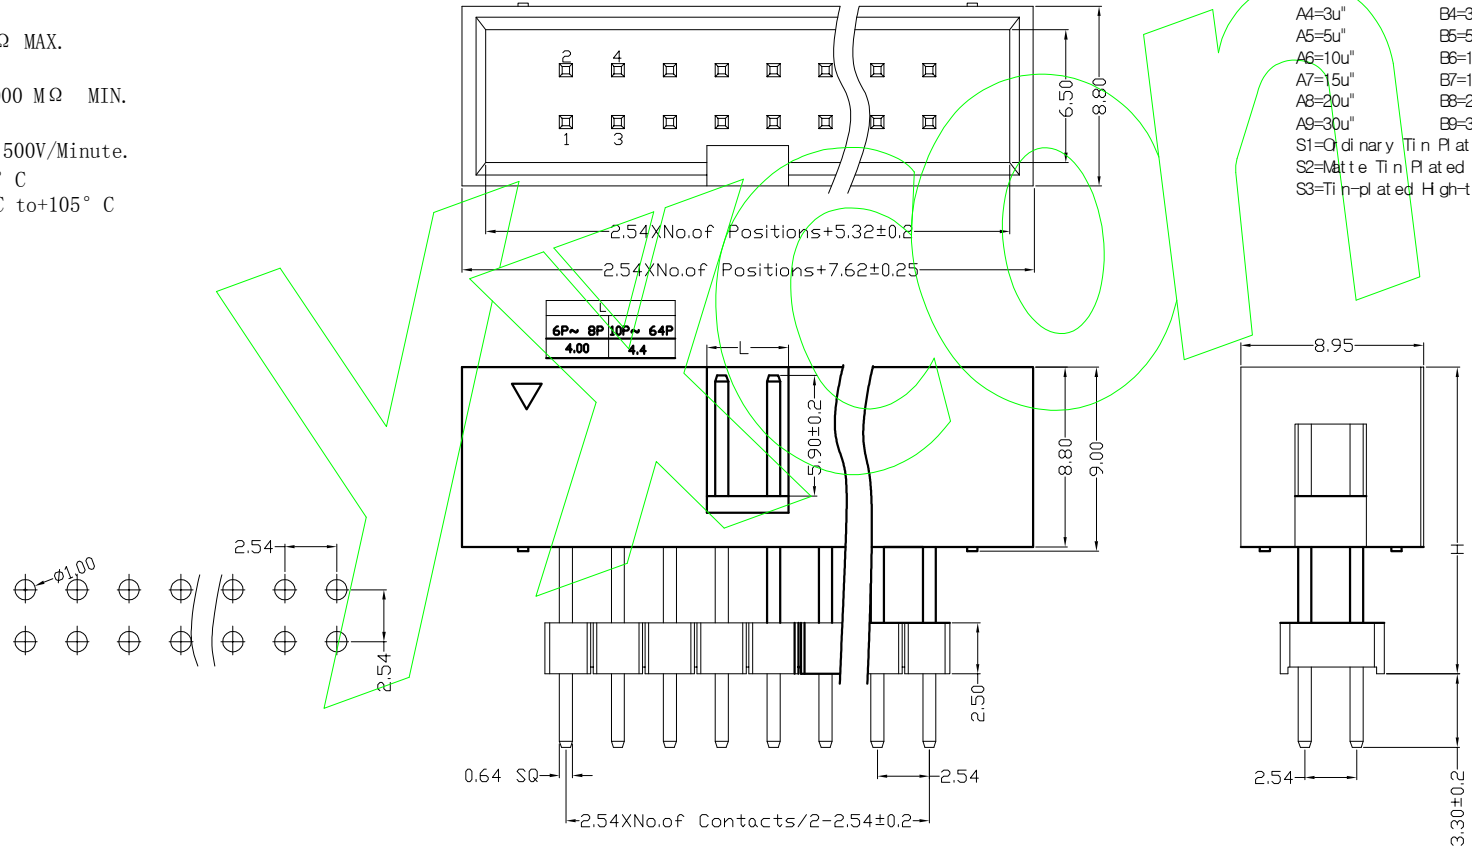

			OPERATION	SCALE	Fit	<b>Yxcon</b> 东莞市宇熙精密连接器有限公司				
			X.X ±0.25	UNIT	MM	www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.				
			X.XX ±0.20	SIZE	A4	DESIGN	周芳杰 2021.7.2	PART NO	B190-2XXXXXX1	
			X.XXX ±0.10	SHEET	1/1	CHECK		TITLE	2.54间距 筒牛 塑高9.0 多塑 180度	
			Angle ±3°	PROJ.	☉	APPROVE		Customer No.		
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION							