
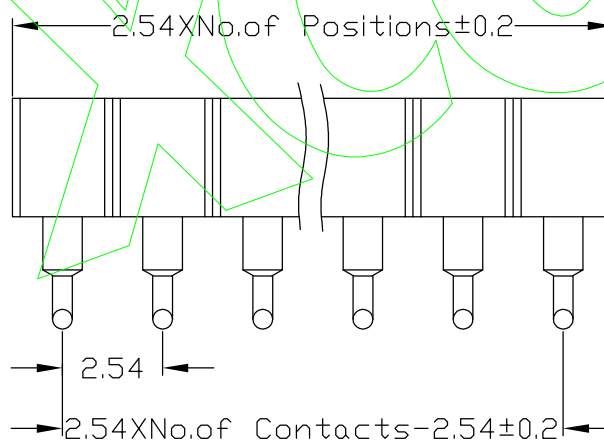
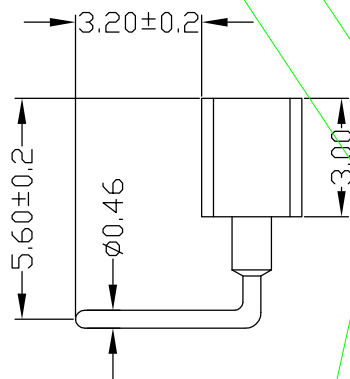
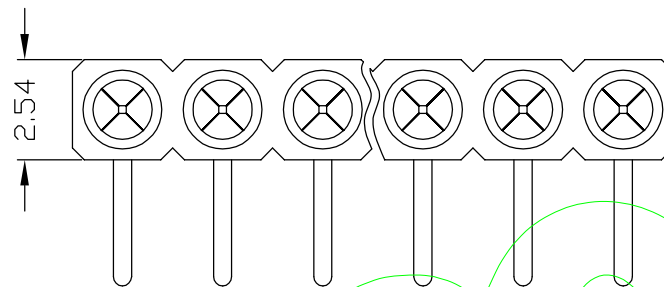


Specifications

Insulator : Black glass filled polyester PPS-GF30-FR
 Flammability : UL94V-0
 Sleeve : Brass CuZn 36Pb3(36000)
 Contact cilp (4 finger) : Beryllium copper (C17200)
 Mating pin \varnothing : 0.40 to 0.66 mm or 0.50SQ
 Forces : (polished steel gauge \varnothing 0.46mm)
 -Insertion : 2 N typ.
 -Withdrawal : 1N typ.
 Mechanical life : min 500 cycles
 Rated current : 3Amp
 Contact resistance: Max 10m Ω
 Dielectric resistance : Min 1000V_{RMS}

Ordering Information

RF130-1 XX 0 X X R XXX 1

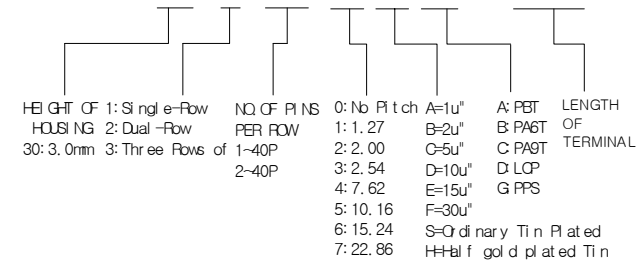

Right socket connector: single row
 Availability from: 2 to 40 contacts
 Standard number of contacts 20, 25, 32 and 40

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co., Ltd.	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.9.3	PART NO.	RF130-1XX0XXRXXX1
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.54圆孔排母 塑高3.0 单排 90度
				Angle	±3°	PROJ.	☉	APPROVE		Customer No.	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION								



Specifications

Insulator : Black glass filled polyester PPS-GF30-FR
 Flammability : UL94V-0
 Sleeve : Brass CuZn 36Pb3(36000)
 Contact cilp (4 finger) : Beryllium copper (C17200)
 Mating pin \varnothing : 0.40 to 0.66 mm or 0.50SQ
 Forces : (polished steel gauge \varnothing 0.46mm)
 -Insertion : 2 N typ.
 -Withdrawal : 1N typ.
 Mechanical life : min 500 cycles
 Rated current : 3Amp
 Contact resistance: Max 10m Ω
 Dielectric resistance : Min 1000V_{RMS}

Ordering Information

RF130-2 XX 3 X X R XXX 1

HEIGHT OF HOUSING	1: Single-Row	2: Dual-Row	30: 3.0mm	NO OF PINS PER ROW	1-40P	2-40P	NO Pitch	0: No Pitch	1: 1.27	2: 2.00	3: 2.54	4: 7.62	5: 10.16	6: 15.24	7: 22.86	A=1u"	B=2u"	C=5u"	D=10u"	E=15u"	F=30u"	A: PBT	B: PA6T	C: PA9T	D: LCP	G: PPS	LENGTH OF TERMINAL
-------------------	---------------	-------------	-----------	--------------------	-------	-------	----------	-------------	---------	---------	---------	---------	----------	----------	----------	-------	-------	-------	--------	--------	--------	--------	---------	---------	--------	--------	--------------------

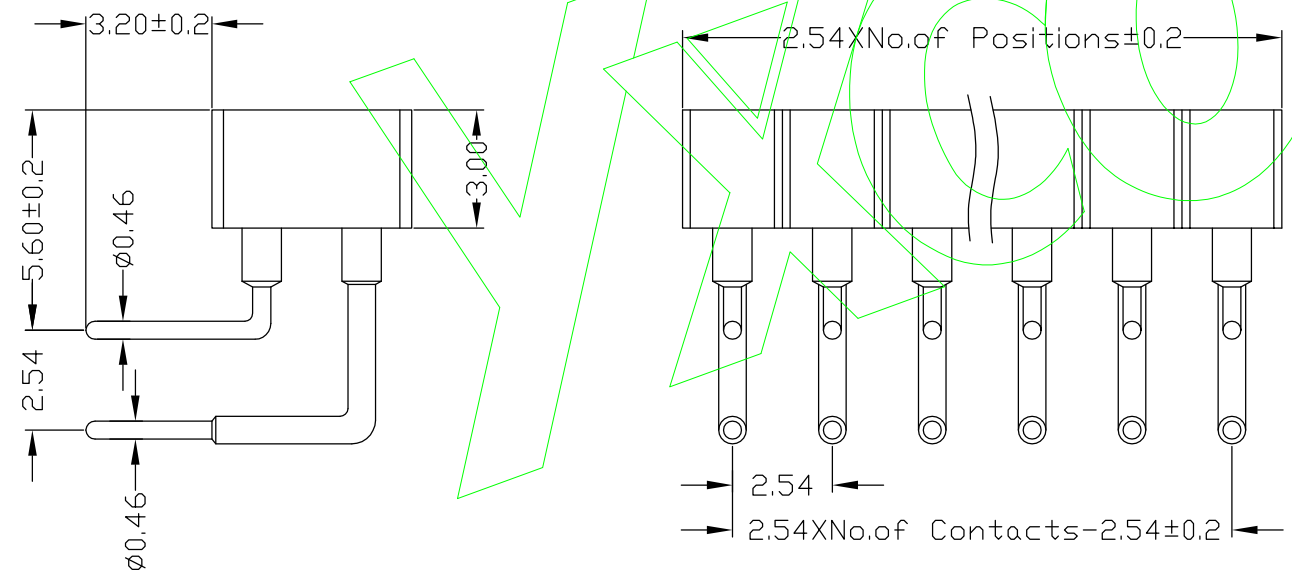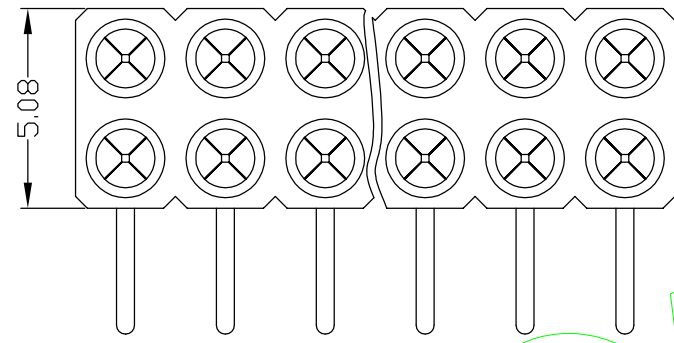

Right socket connector: double row
 Availability from: 4 to 80 contacts
 Standard number of contacts 20, 40, 56, 60 and 72

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co., Ltd.			
				X.X	±0.25	UNIT		MM					
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2021.9.3	PART NO	RF130-2XX3XXRXXX1		
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE	2.54圆孔排母 塑高3.0 双排 90度		
				Angle	±3°	PROJ.	☉	APPROVE		Customer No.			
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION		DIM	TOL							