

# Ordering Information

## B190-1 10 C9 G M R B 1T

NO. OF PINS	Contact	Plating	INSULATOR	BACK	PACKING
4-46P	Full Gold	Semi-gold	MATERIAL:	Grey427	PE Bag
	A0=0.8u"	C0=0.8u"	B PA6T	Grey413	Tape & Reel
	A1=1u"	C1=1u"	C PA9T	White	Tube
	A2=1.5u"	C2=1.5u"	D LCP	Blue	Tube+CAP
	A3=2u"	C3=2u"	G PPS	Yellow	Tray
	A4=3u"	C4=3u"		LP Blue	
	A5=5u"	C5=5u"		Natural	
	A6=10u"	C6=10u"		Red	
	A7=15u"	C7=15u"		Reseda	
	A8=20u"	C8=20u"			
	A9=30u"	C9=30u"			
	S1=Orinary Tin Plated				
	S2=Matte Tin Plated				
	S3=Tin-plated High-temperature				

# Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶态: PPS+40%G. F UL94V-0, 颜色: 红色/浅绿色.

Housing: PPS+40%G. F UL94V-0, Color: Red/Green Reseda

CAP: PA9T+30%G. F UL94V-0, 颜色: 黑色.

CAP: PA9T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底40u"MIN, 表面镀半金高温雾锡 (金: 30u"MIN 高温雾锡80-120u")

Contact: Brass, 30u" MIN gold plating on contact area, 80-120u" high temperature matte Tin plating on solder area, 40u" MIN Nickel underplating over all

接地片: 黄铜, 镍底40u"MIN 高温雾锡80-120u" earth tag: Brass, 80-120u" high temperature matte Tin plating on solder area, 40u" MIN Nickel underplating over all

2. 特性 (characteristics):

额定电流: 3 AMP

Rated Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.


Withstanding Voltage: AC 500V/Minute.

温度范围: -40° C to +105° C

Temperature Range: -40° C to +105° C

Reseda (色码: RAL 6027)

Red (色码: RAL 3014)

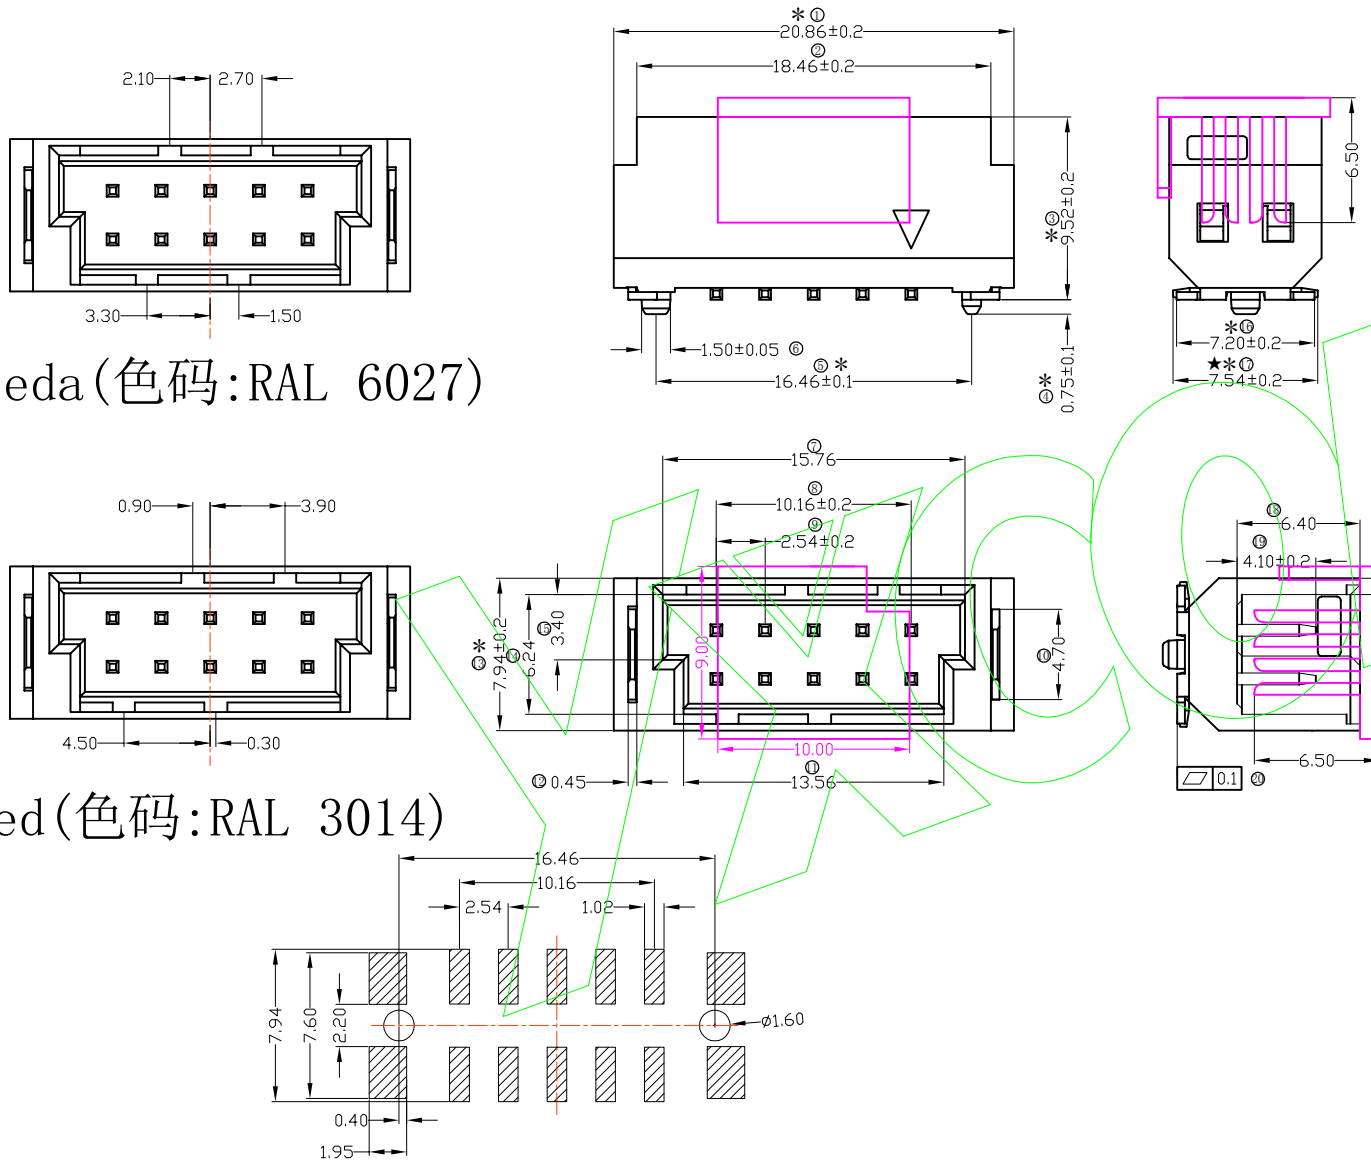

			OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co., Ltd.		
			X.X	+0.30	UNIT		MM				
			X.XX	+0.20	SIZE	A4	DESIGN	周芳杰 2022.06.14	PART NO	B190-110C9CMRB1T	
			X.XXX	+0.10	SHEET	1/1	CHECK		TITLE	2.54筒牛 9mm塑高 2*5P SMT宽7.5mm 固定片宽7.2mm PPS料红色 镀半金高温雾锡(镍40u"MIN 金30u"MIN 高温雾锡80-120u") 带大小定位柱 CAP+卷装	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION		PROJ.		APPROVE		Customer No.		
1	2	3	4	5	6	7	8	9	10		