

Specifications

备注(Remark)
 1. 材料(MATERIAL)
 胶芯: PPS+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PPS+30%G.F UL94V-0, Color: Black
 四方针: 黄铜, 镍底50-80u", 表面镀高温雾锡100-160u"
 Contact: Brass, 100-160u" HIGH TEMPRETURE MATTE TIN OVER ALL
 50-80u" NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
 额定电压: 125V AC/DC
 Rated Voltage: 125V AC/DC
 额定电流: 2 AMP
 Raring Current: 2 AMP.
 接触阻抗: 10 mΩ MAX.
 Contact Resistance: 10 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V/分钟.
 Withstanding Voltage: AC 500V/Minute.
 温度范围: -40° C to+105° C
 Temperture Range: -40° C to+105° C

RoHS
COMPLIANT



客编:

注意
事项
1. 带*为品质重点
检验尺寸, 带★
为SPC管控尺寸.

Ordering Information

BZ20-11 02 S4 G S 173 A 1T

HEIGHT OF HOUSING	NO OF PINS PER ROW	Full of Gold	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15: 1.5mm	1~40P	A0=0.8u"	BC=0.8U'	A: PBT	A: FE Bag	A: FE Bag
17: 1.7mm		A1=1u"	B1=1U'	B: PA6T	B: Tape & Reel	B: Tape & Reel
20: 2.0mm		A2=1.5u"	B2=1.5U'	C: PA9T	C: Tube	C: Tube
25: 2.54mm		A3=2u"	B3=2U'	D: LCP	D: Tube+CAP	D: Tube+CAP
		A4=3u"	B4=3U'	G: PPS	E: Tray	E: Tray
		A5=5u"	B5=5U'			
		A6=10u"	B6=10U'			
		A7=15u"	B7=15U'			
		A8=20u"	B8=20U'			
		A9=30u"	B9=30U'			
		S1=Ordinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

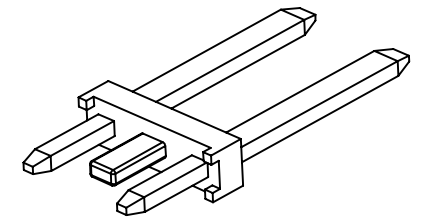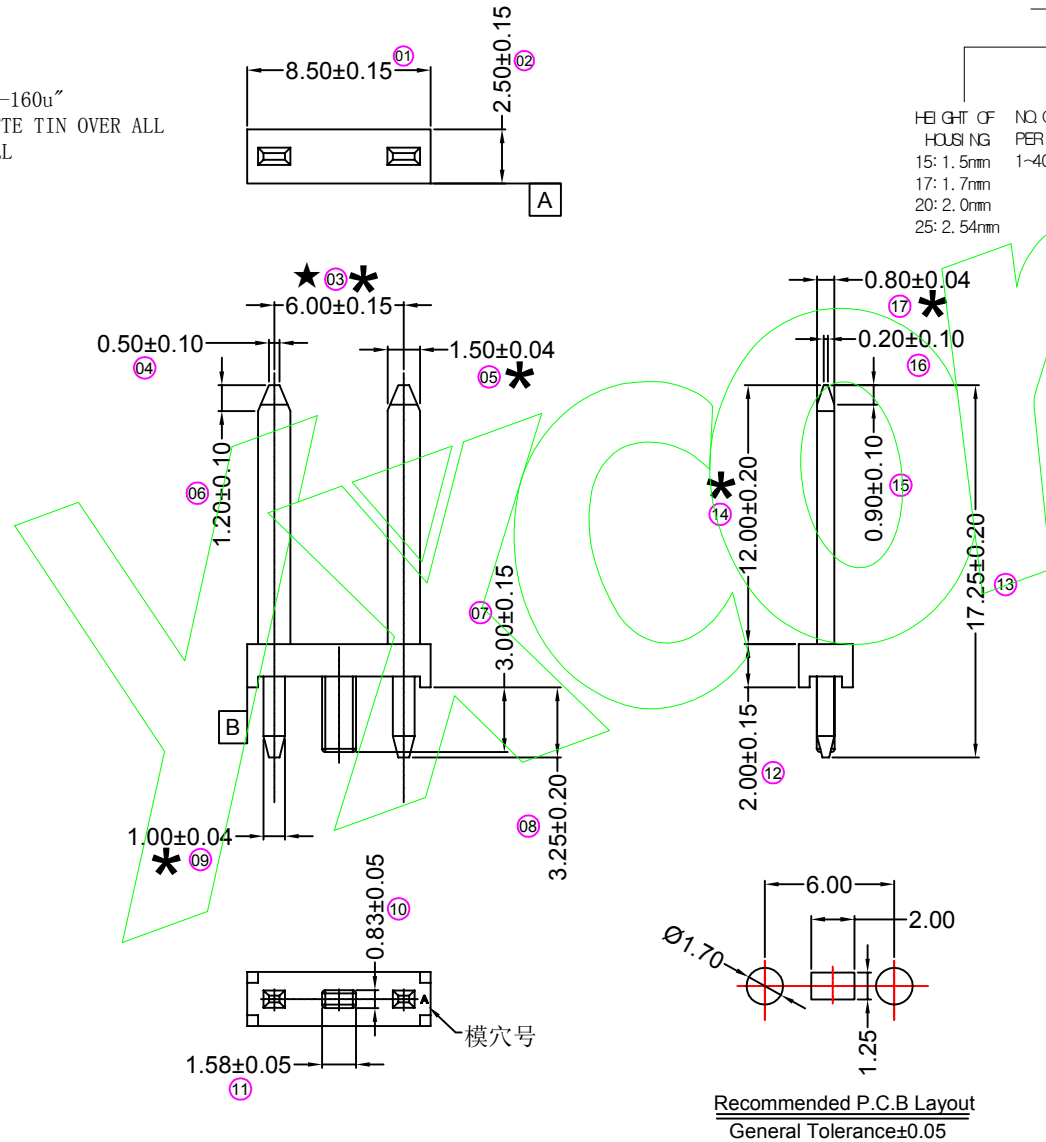

Recommended P.C.B Layout
General Tolerance±0.05

REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.20	UNIT	MM					
				X.XX	±0.15	SI ZE	A4	DESIGN/DATE	李官森2022.02.25	PART NO	BZ20-1102S4GS173A1T	
				X.XXX	±0.08	SHEET	1/1	CHECK/ DATE		TITLE:	PH6, 0*2.0扁针 1*2P L=17.25/3.25 180度 带扁柱 保持力0.7KG/P PPS料 镀高温雾锡100-160u" 镍底50-80u" 袋+盒装	
				Angle	±2°	PRQJ.	⊕ ⊖	APPROVE/ DATE		Customer No.		
				DIM	TOL							