

Specifications

备注(Remark)

1. 材料 (MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA9T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀高温雾锡100u"MIN

Contact: Brass, 100u"MIN HIGH TEMPRETURE MATTE TIN OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电压: 125V AC/DC

Rated Voltage: 125V AC/DC

额定电流: 3 AMP

Raring Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.


温度范围: -40° C to +105° C

Temperature Range: -40° C to +105° C

Ordering Information

P134-11 02 S4 C R 142 F 1T

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Full Cf Gold	Plating Semi-gold	INSULATOR MATERIAL:	LENGTH OF CF	PACKING
15: 1.5mm	1-40P	A0=0.8u"	B0=0.8U"	A: PBT	TERMINAL	A: PE Bag
17: 1.7mm		A1=1u"	B1=1U"	B: PA6T		B: Tape & Reel
20: 2.0mm		A2=1.5u"	B2=1.5U"	C: PA9T		C: Tube
25: 2.54mm		A3=2u"	B3=2U"	D: LCP		D: Tube+CAP
		A4=3u"	B4=3U"			E: Tray
		A5=5u"	B5=5U"			
		A6=10u"	B6=10U"			
		A7=15u"	B7=15U"			
		A8=20u"	B8=20U"			
		A9=30u"	B9=30U"			
		S1=Ordinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				
		S4=High Temperature Matte Tin				

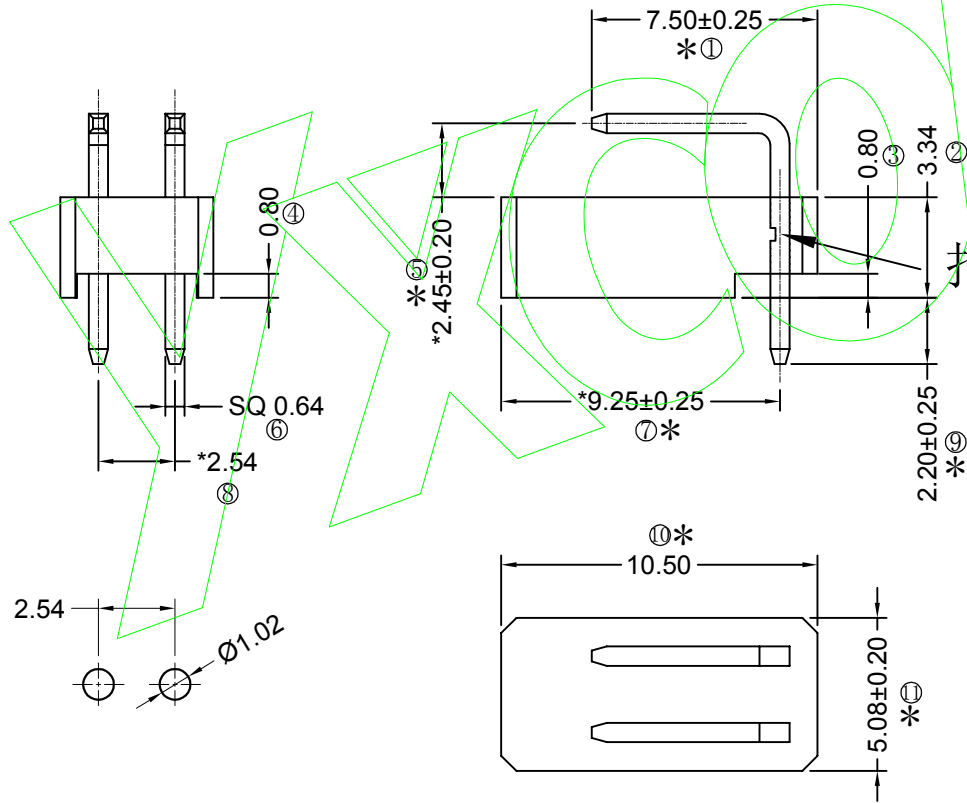

打内K (0.68-0.78mm)

RoHS COMPLIANT

客编:

注意事项

1. 带*为品质重点检验尺寸

OPERATION	SCALE	Fit	Yxcon 东莞市宇熙精密连接器有限公司	
X.X ±0.20	UNIT	MM	Dongguan Yuxi Electronic Co., Ltd.	
X.XX ±0.15	SIZE	A4	DESIGN DATE	PART NO.
X.XXX ±0.08	SHEET	1/1	李官淼 2021.10.23	P134-1102S4CR142F1T
Angle ±2°	PROJ.	APPROVE/DATE	CHECK/DATE	TITLE
DM TOL				PH2.54*3.34 1*2P L=13.8/0.5(2.13)/2.2 90度 打内K PA9T 镀高温雾锡100u"Min 镍底30u"Min 400/透明卷
REV	DATE	SYMBOL	Customer No.	