

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: SPS (XAREC EA533)+30%G.F UL94V-0, 颜色: 黑色.

Housing: SPS (XAREC EA533)+30%G.F UL94V-0, Color: Black

四方针: 磷铜, 镍底50-100u", 表面镀高温亮锡100-180u"

Contact: Phosphorous, 100-180u" SEMI-GOLD PLATED WITH HIGH TEMPERATURE BRIGHT TIN
50-100u" NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.


温度范围: -40° C to +105° C

Temperature Range: -40° C to +105° C

Ordering Information

P966-11 02 S3 J S 202 F 1T

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Full Cr Gold	Semi-gold	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
10: 1.0mm	1~40P	A0=0.8u"	B0=0.8u"	B: PA6T		A: PE Bag
15: 1.5mm		A1=1u"	B1=1u"	C: PA9T		B: Tape & Peel
20: 2.0mm		A2=1.5u"	B2=1.5u"	D: LCP		C: Tube
		A3=2u"	B3=2u"	J: SPS		D: Tube+CAP
		A4=3u"	B4=3u"			E: Tray
		A5=5u"	B5=5u"			
		A6=10u"	B6=10u"			
		A7=15u"	B7=15u"			
		A8=20u"	B8=20u"			
		A9=30u"	B9=30u"			
		S1=O dinary Tin Plated				
		S2= Matte Tin Plated				
		S3= Tin-plated High-temperature				

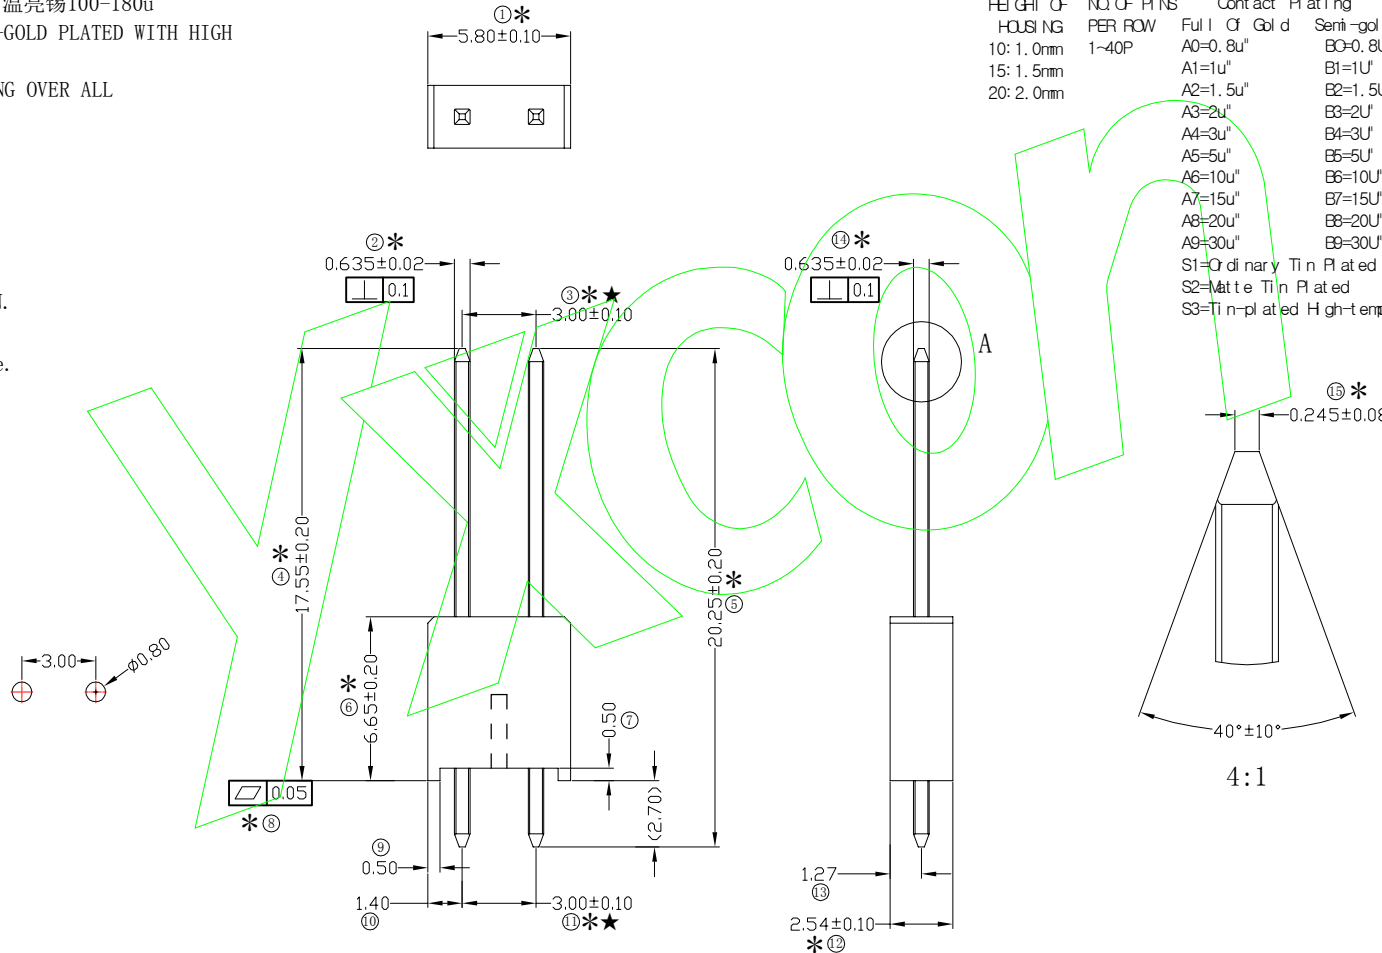

RoHS COMPLIANT

客编:

注意事项

1. 带*为品质重点检验尺寸, 带★为SPC管控尺寸.

		OPERATION		SCALE		Fit		Yxcon 东莞市宇熙精密连接器有限公司	
		X.X	±0.25	UNIT		MM		www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.	
		X.XX	±0.20	SIZE	A4	DESIGN	李官森2021.12.09	PART NO	P966-1102S3JS202F1T
		X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	PH3.0*6.65排针 1*2P L=20.2/2.7 180度 凹槽型 磷铜 SPS料 高温亮锡100-180u" 镍底50-100u" 250/透明卷
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DI M	TOL	PROJ.	APPROVE	Customer No.	