

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA9T+30%G.F UL94V-0, Color: Black

四方针: 磷铜, 镍底30~50u", 表面镀高温雾锡120~200u"

Contact: Phosphorous bronze, 120~200u" HIGH TEMPRETURE MATT TIN OVER ALL
30~50u" NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Raring Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40° C to +105° C

Temperature Range: -40° C to +105° C

Ordering Information

P025-12 15 S4 C M 153 B 2T

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Full of Gold	Contact Semi-gold	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15: 1.5mm	2-40P	A0=0.8u"	B0=0.8u"	B: PA6T		A: PE Bag
17: 1.7mm		A1=1u"	B1=1.5u"	C: PA9T		B: Tape & Reel
20: 2.0mm		A2=1.5u"	B2=1.5u"	D: LCP		C: Tube
25: 2.54mm		A3=2u"	B3=2u"			D: Tube+CAP
30: 3.0mm		A4=3u"	B4=3u"			E: Tray
		A5=5u"	B5=5u"			
		A6=10u"	B6=10u"			
		A7=15u"	B7=15u"			
		A8=20u"	B8=20u"			
		A9=30u"	B9=30u"			
		S1=Ordinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

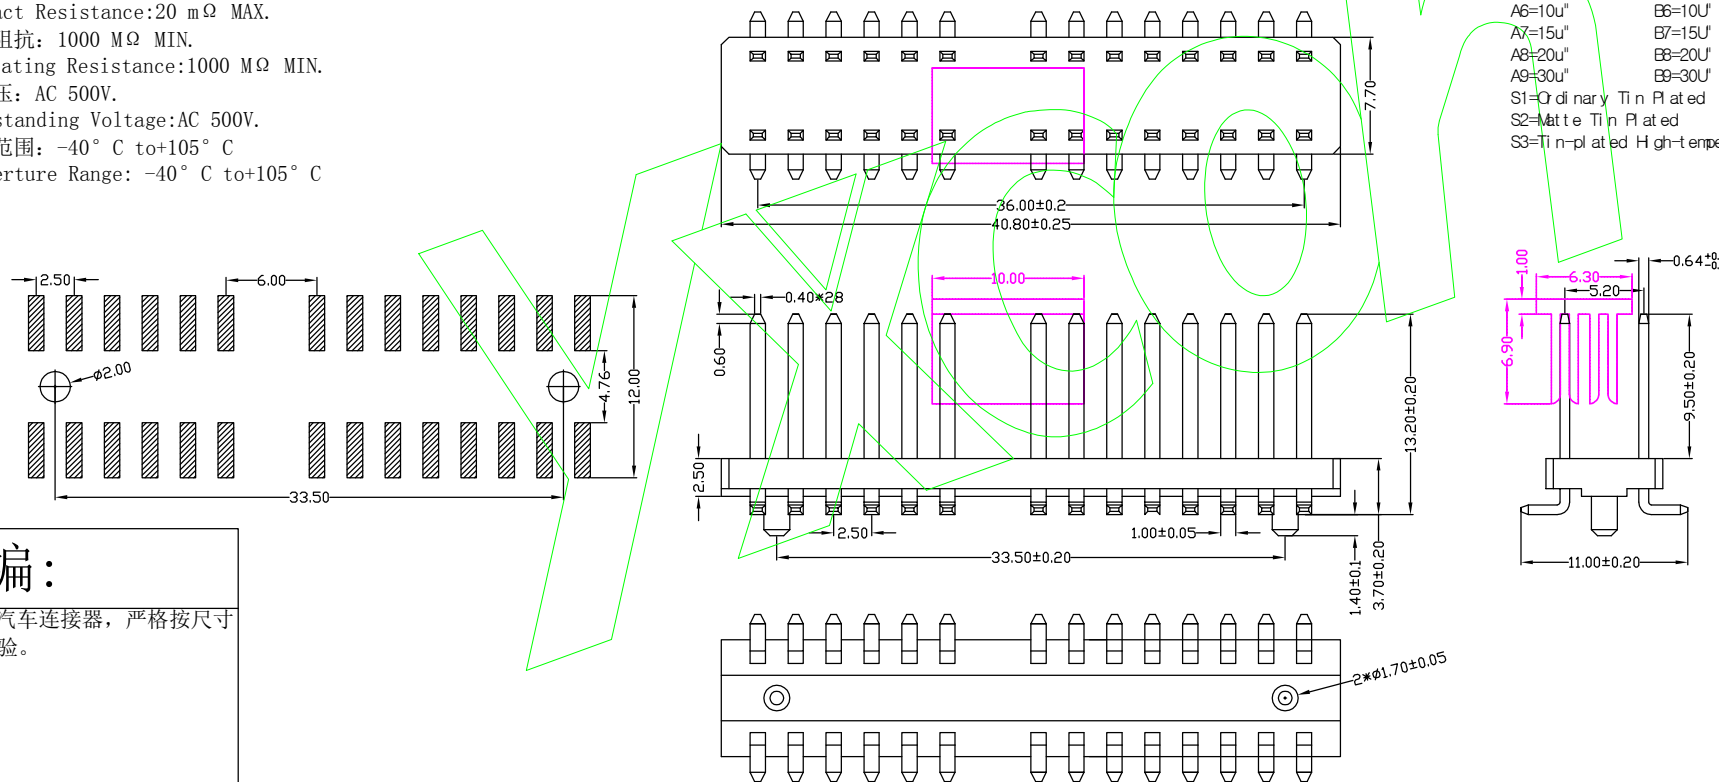

客编:

1. 汽车连接器, 严格按尺寸检验。

注意事项

OPERATION		SCALE		Fit		Yxcon 东莞市宇熙精密连接器有限公司			
X.X	+0.25	UNIT		MM		Dongguan Yuxi Electronic Co., Ltd.			
X.XX	+0.20	SI ZE	A4	DESIGN	杨哲	PART NO	P025-1215S4CM153B2T		
X.XXX	+0.10	SHEET	1/1	CHECK		TITLE	2.5间距扁针2.5塑高5.2排距 2*15P L=15.3/11.0(0.56)/9.5 SMT堵13.14P 带柱:2.6*1.7 PA9T料 镀高温雾锡 CAP+卷装		
Angle	+3°	PROJ.	☉	APPROVE		Customer No.			
DIM	TOL								