

# Specifications

备注 (Remark)

## 1. 材料 (MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.  
 Housing: PA9T+30%G.F UL94V-0, Color: Black  
 四方针: 黄铜, 镀底30u", 表面镀全金接触点30u"  
 Contact: Brass, 30u" GOLD PLATING OVER ALL  
 30u" NICKEL UNDERPLATING OVER ALL


## 2. 特性 (characteristics):

额定电流: 0.75 AMP  
 Raring Current: 0.75 AMP.  
 接触阻抗: 20 mΩ MAX.  
 Contact Resistance: 20 mΩ MAX.  
 绝缘阻抗: 1000 MΩ MIN.  
 Insulating Resistance: 1000 MΩ MIN.  
 耐电压: AC 500V/分钟.  
 Withstanding Voltage: AC 500V/Minute.  
 温度范围: -40° C to +105° C  
 Temperature Range: -40° C to +105° C

# Ordering Information

P615-10 32 A9 C M 062 B 1

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating		INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
14: 1.4mm	2~50P	Full Of Gold	Semi-gold	D: LCP		
		A0=0.8u"	B0=0.8U"			
		A1=1u"	B1=1U"			
		A2=1.5u"	B2=1.5U"			
		A3=2u"	B3=2U"			
		A4=3u"	B4=3U"			
		A5=5u"	B5=5U"			
		A6=10u"	B6=10U"			
		A7=15u"	B7=15U"			
		A8=20u"	B8=20U"			
		A9=30u"	B9=30U"			
		S1=Ordinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

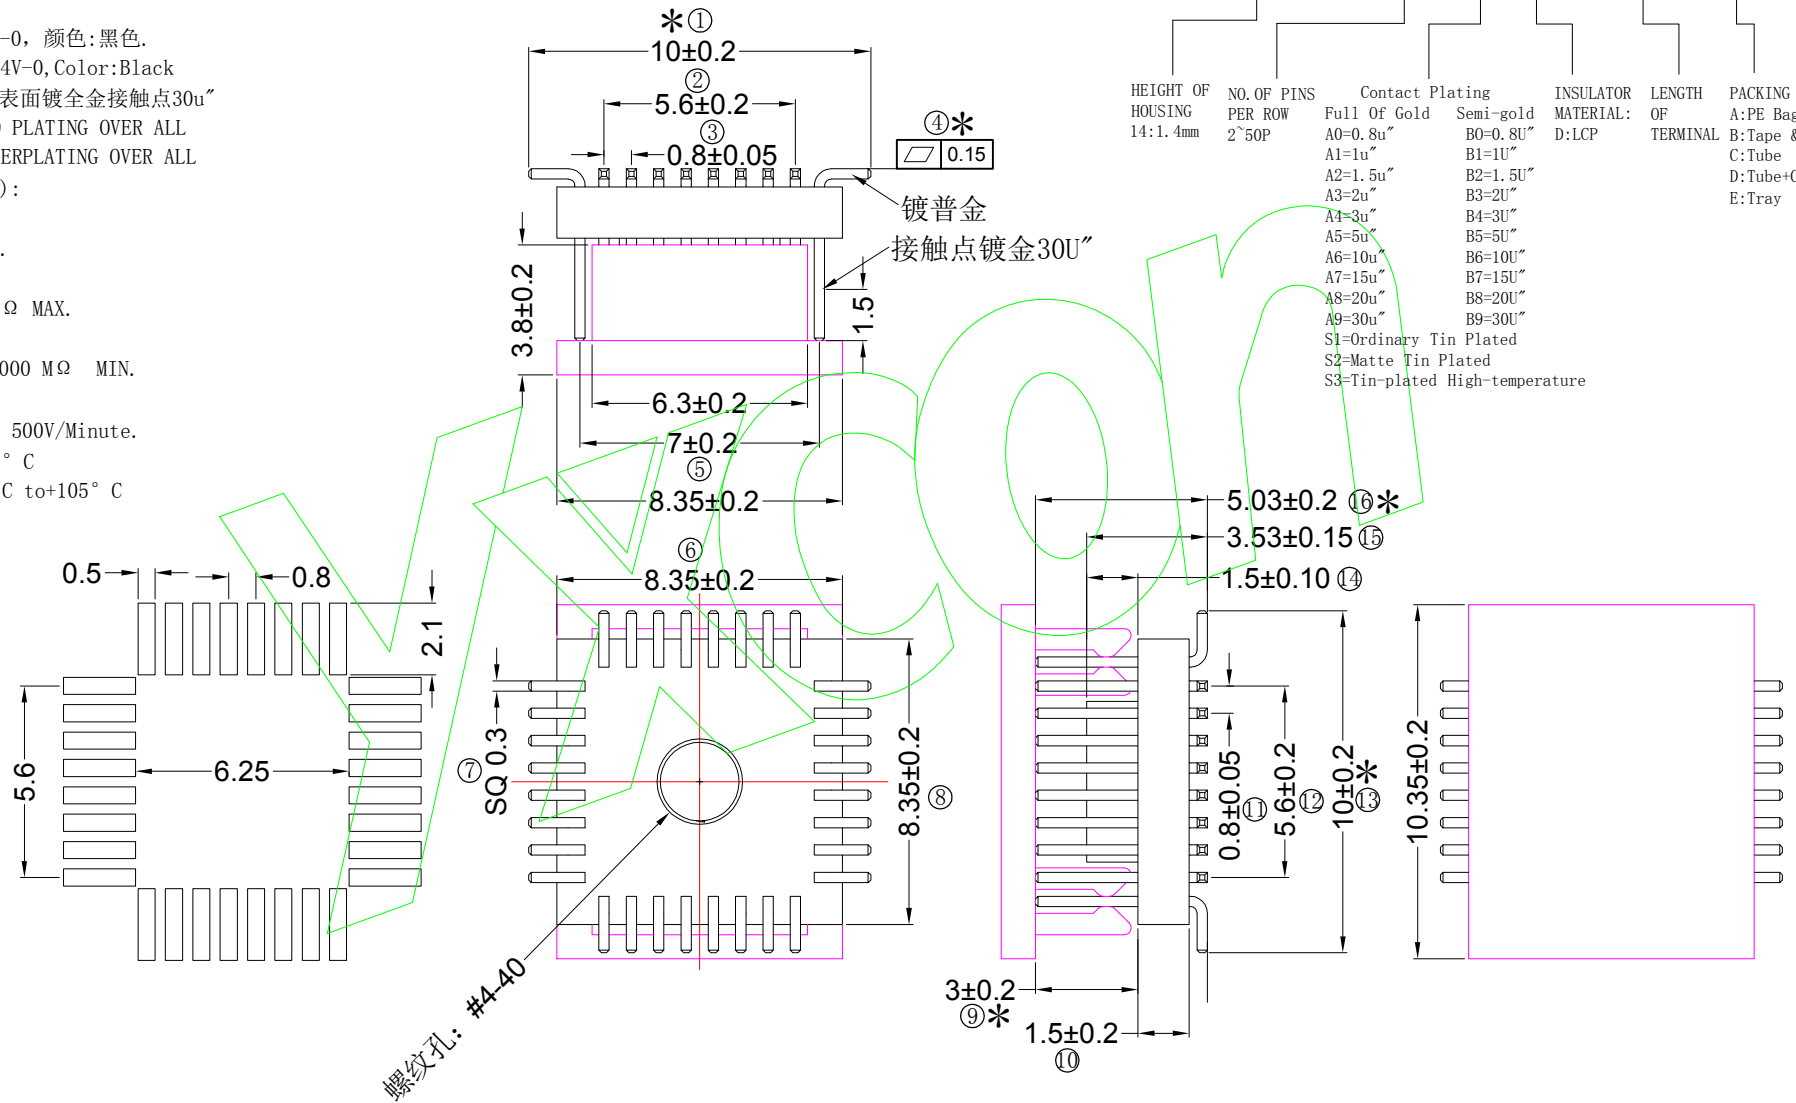

			OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co., Ltd.			
			X.X	±0.25	UNIT		MM					
			X.XX	±0.20	SIZE	A4	DESIGN	李官森2022.03.31	PART NO		P615-1032A9CM062B1	
			X.XXX	±0.10	SHEET	1/1	CHECK		TITLE		0.8间距正方形排针 32P L=6.2/8.35(0.23)/3.0 SMT 带牙孔 PA9T 镀全金接触点30U" CAP+650/卷装	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION		PROJ.	APPROVE			Customer No.			