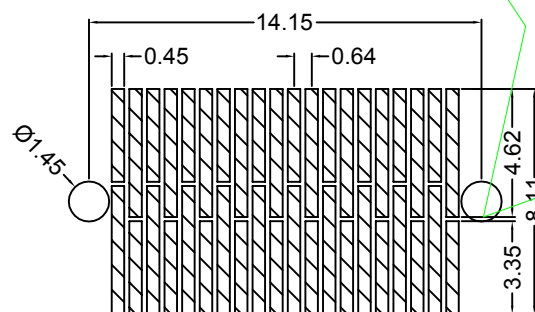



Ordering Information

F342-14 XX A6 D MY X 2

30u" NICKEL UNDERPLATING OVER ALL

Temperature Range: -40°C to $+105^{\circ}\text{C}$ 

General Tolerance ± 0.05

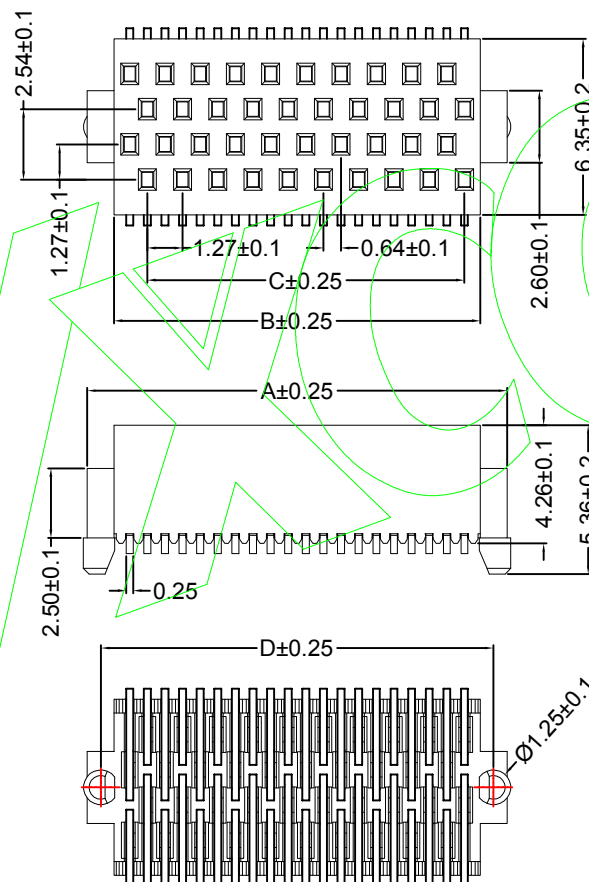
$$D = (\text{NO. OF POSITION PER ROW}) * 1.27 + 1.45$$

NO. OF PINS PER ROW	Contact Plating	INSULATOR	PACKING
2~50P	Full Of Gold	Semi-gold	MATERIAL:
	A0=0.8u"	B0=0.8U"	A:PE Bag
	A1=1u"	B1=1U"	B:Tape & Reel
	A2=1.5u"	B2=1.5U"	C:Tube
	A3=2u"	B3=2U"	D:Tube+CAP
	A4=3u"	B4=3U"	E:Tray
	A5=5u"	B5=5U"	
	A6=10u"	B6=10U"	
	A7=15u"	B7=15U"	
	A8=20u"	B8=20U"	
	A9=30u"	B9=30U"	
	S1=Ordinary Tin Plated		
	S2=Matte Tin Plated		
	S3=Tin-plated High-temperature		

				OPERATION		SCALE		Fit	 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.			
				X.X	±0.25	UNIT		MM	www.yxcon.com			
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2023. 5. 13	PART NO	F342-14XXA6DMYX2	
				X.XXX	±0.10							
				Angle	±3°	SHEET	2/2	CHECK		TITLE	FH1. 27*4. 26四排母 4*XXP SMT: 7. 1 带外柱Φ1. 25*1. Y型 LCP料 镀金金接触点10U”	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.		