

Specifications

Ordering Information

P128-12 08 S4 C S 162 B 1T

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA9T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底50u"MIN, 表面镀高温雾锡100u"MIN

Contact: Brass, 100u" MIN HIGH TEMPRETURE MATTE TIN OVER ALL
50u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电压: 250V AC/DC

Rated Voltage: 250V AC/DC

Max. processing temp: 260°C for 10seconds

额定电流: 3 AMP

Raring Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.


Withstanding Voltage: AC 500V/Minute.

温度范围: -40° C to +105° C

Temperature Range: -40° C to +105° C

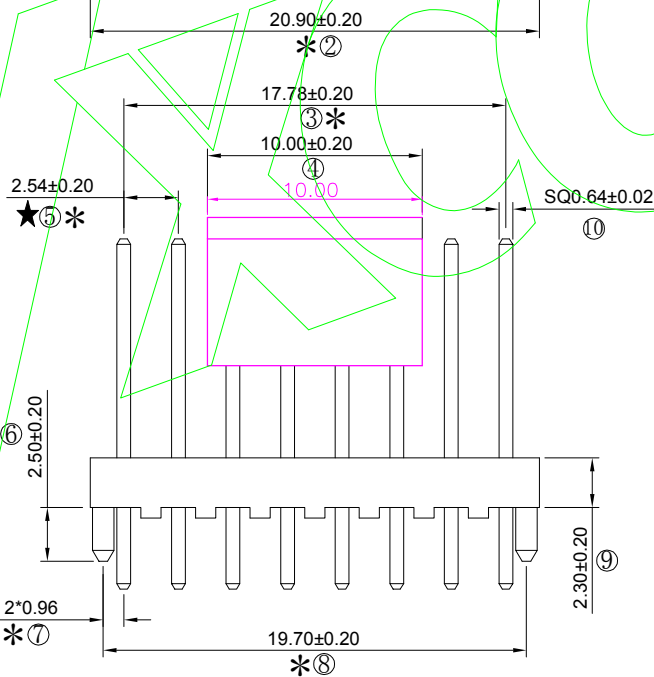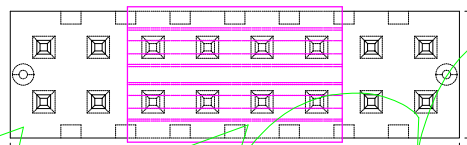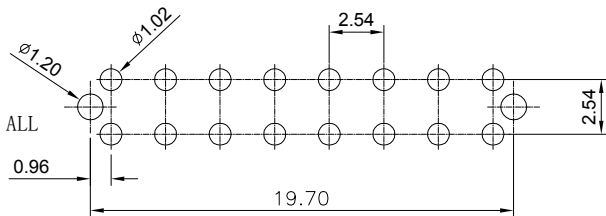

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Full of Gold	Contact Plating Semi-gold	INSULATOR MATERIAL	LENGTH OF TERMINAL	PACKING
25: 2.5mm	1~40P	A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	B: PA6T C: PA9T D: LCP		A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature S4=High Temperature Matte Tin				

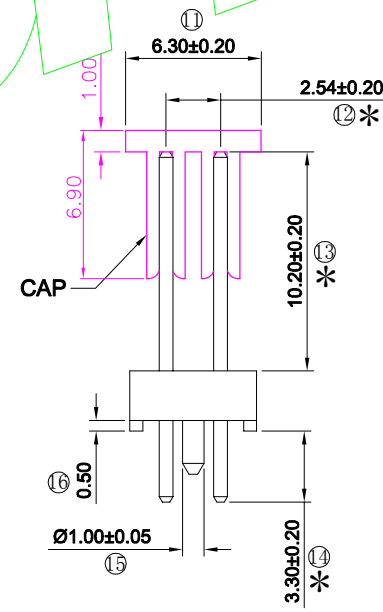

RoHS COMPLIANT

客编:

注意事项

1. 带*为品质重点检验尺寸, 带★为SPC管控尺寸.

REV			DATE			SYMBOL			MODIFICATION DESCRIPTION			OPERATION		SCALE		Fit		Yxcon 东莞市宇熙精密连接器有限公司		
												X.X	±0.20	UNIT		MM	www.yxcon.com Dongguan Yuxi Electronic Co., Ltd.			
												X.XX	±0.15	SIZE	A4	DESIGN	李官森2021.09.19	PART NO	P128-1208S4CS162B1T	
												X.XXX	±0.08	SHEET	1/1	CHECK		TITLE	PH2.54*2.8 2*SP L=16, 2/3, 3 180度 带柱 PA9T 镀高温雾锡100U" 镍底50U" CAP+150/透明卷	
												Angle	±2°	PRQJ.	☉	APPROVE		Customer No.		
												DIM	TOL							