Specifications

备注(Remark)
1.材料(MATERIAL)
胶芯：PA9T+30%G.F UL94V-0，颜色:黑色.
Housing:PA9T+30%G.F UL94V-0,Color:Black
端子：磷/青铜，镍底30u"MIN,表面镀金lu"MIN
Contact:Phosphor bronze,lu"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2.特性 (characteristics):
额定电流：3 AMP
Raring Current:3 AMP.
接触阻抗：20 mΩ MAX.
Contact Resistance:20 mΩ MAX.
绝缘阻抗：1000 MΩ MIN.
Insulating Resistance:1000 MΩ MIN.
耐电压：AC 500V/分钟.
Withstanding Voltage:AC 500V/Minute.
温度范围：-40° C to+105° C
Temperture Range: -40° C to+105° C

Ordering Information

F150-11 XX XX X RU X 1

NO. OF PINS PER ROW	Contact Plating Full Of Gold	Contact Plating Semi-gold	INSULATOR MATERIAL:	PACKING
1~40P	A0=0.8u"	B0=0.8U'	A: PBT	A: PE Bag
	A1=1u"	B1=1U'	B: PA6T	B: Tape & Reel
	A2=1.5u"	B2=1.5U'	C: PA9T	C: Tube
	A3=2u"	B3=2U'	D: LCP	D: Tube+CAP
	A4=3u"	B4=3U'		E: Tray
	A5=5u"	B5=5U'		
	A6=10u"	B6=10U'		
	A7=15u"	B7=15U'		
	A8=20u"	B8=20U'		
	A9=30u"	B9=30U'		
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

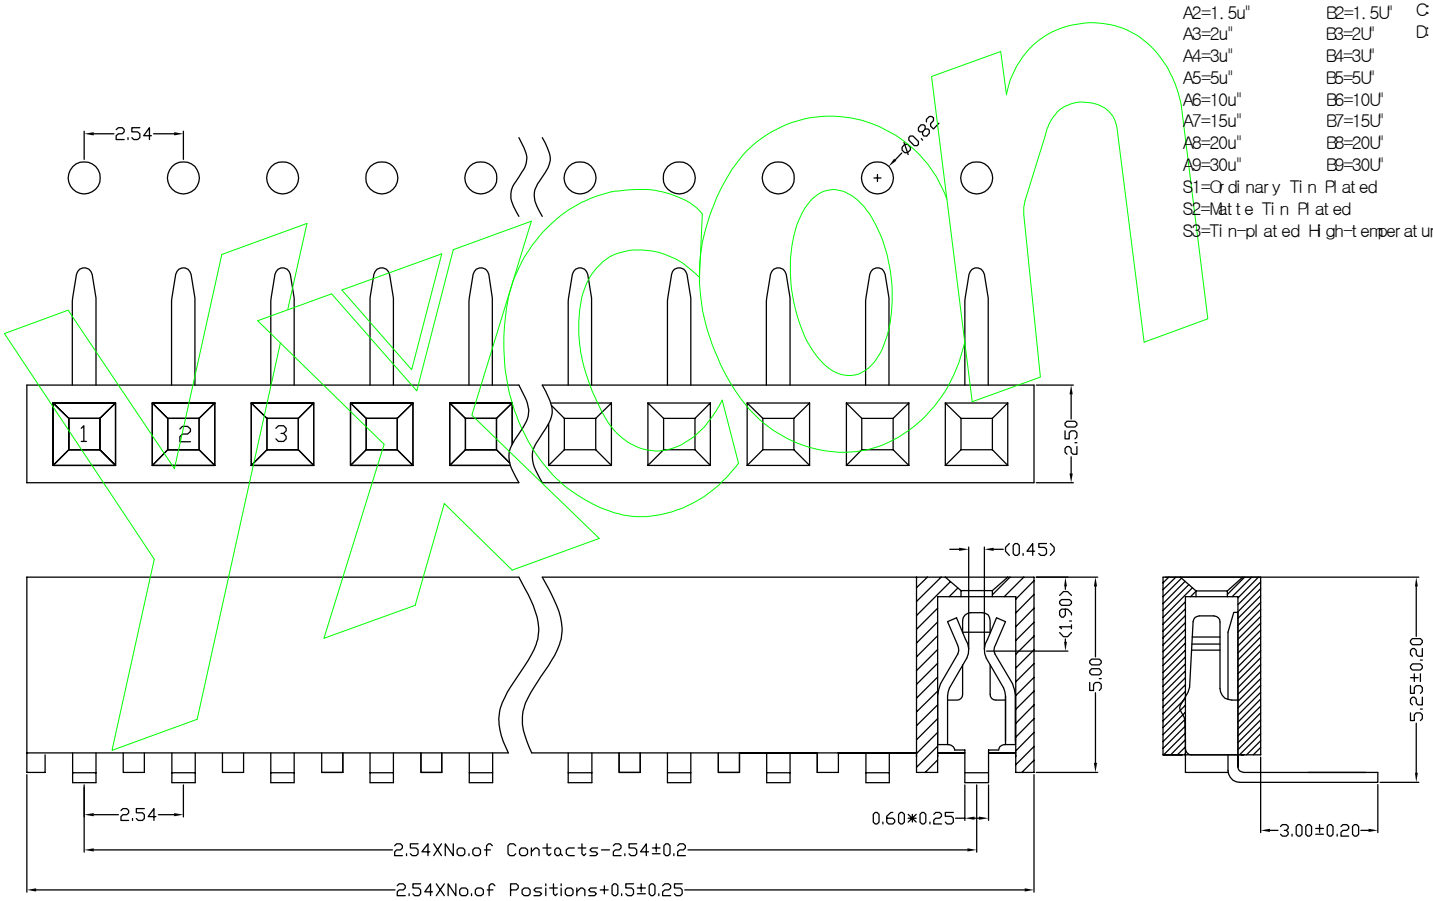

REV	DATE	SYMBOL	MODIFICATION DESCRIPTION

OPERATION	
X.X	±0.25
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

SCALE	Fit				
UNIT	MM				
SIZE	A4	DESIGN	周芳杰 2021.6.26	PART NO.	F150-11XXXXXRUX1
SHEET	1/1	CHECK		TITLE:	2.54间距 塑高5.0 单排母 90度 U型 塑宽2.5
PROJ.		APPROVE		Customer No.	

Yxcon www.yxcon.com 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.

Specifications

备注(Remark)
1.材料(MATERIAL)
胶芯：PA9T+30%G.F UL94V-0，颜色:黑色.
Housing:PA9T+30%G.F UL94V-0,Color:Black
端子：磷/青铜，镍底30u"MIN,表面镀金0.8u"MIN
Contact:Phosphor bronze,0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2.特性 (characteristics):
额定电流：3 AMP
Raring Current:3 AMP.
接触阻抗：20 mΩ MAX.
Contact Resistance:20 mΩ MAX.
绝缘阻抗：1000 MΩ MIN.
Insulating Resistance:1000 MΩ MIN.
耐电压：AC 500V/分钟.
Withstanding Voltage:AC 500V/Minute.
温度范围：-40° C to+105° C
Temperture Range: -40° C to+105° C

Ordering Information

F150-11 XX XX X RU X 2

NO. OF PINS PER ROW	Contact Plating Full Of Gold	Contact Plating Semi-gold	INSULATOR MATERIAL:	PACKING
1~40P	A0=0.8u"	B0=0.8U"	A: PBT	A: PE Bag
	A1=1u"	B1=1U"	B: PA6T	B: Tape & Reel
	A2=1.5u"	B2=1.5U"	C: PA9T	C: Tube
	A3=2u"	B3=2U"	D: LCP	D: Tube+CAP
	A4=3u"	B4=3U"		E: Tray
	A5=5u"	B5=5U"		
	A6=10u"	B6=10U"		
	A7=15u"	B7=15U"		
	A8=20u"	B8=20U"		
	A9=30u"	B9=30U"		
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

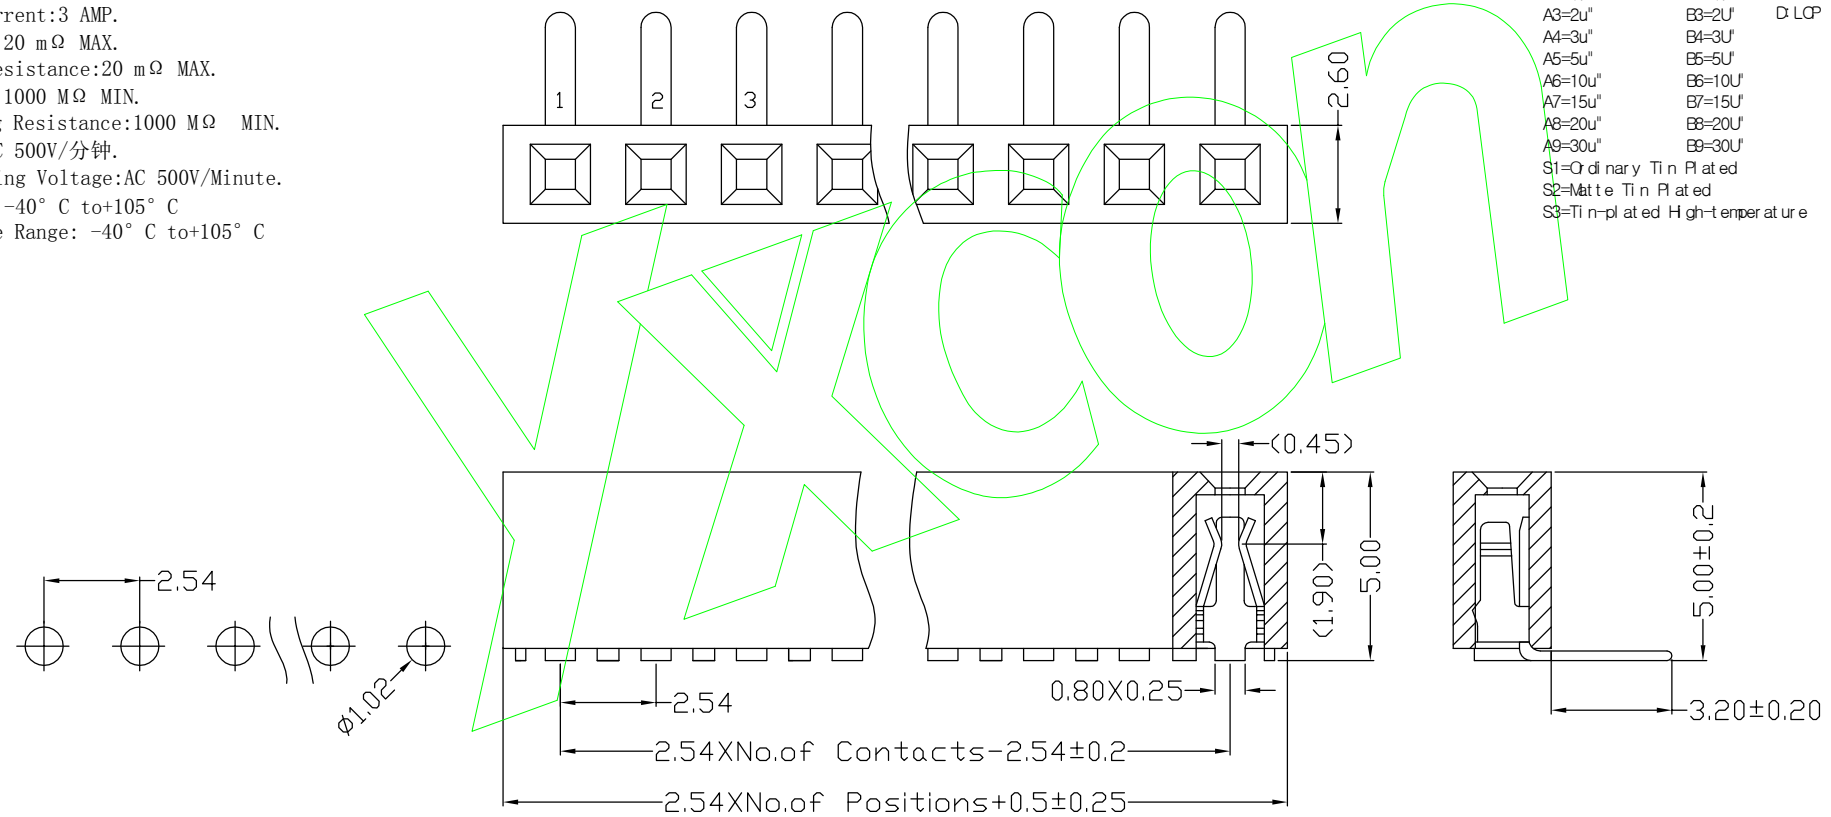

yxcon

REV	DATE	SYMBOL	MODIFICATION DESCRIPTION

OPERATION	
X.X	±0.25
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

SCALE	Fit	Yxcon www.yxcon.com	东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.
UNIT	MM		
SIZE	A4	DESIGN	周芳杰 2021.6.26
SHEET	1/1	CHECK	
PROJ.		APPROVE	

PART NO.	F150-11XXXXXRUX2
TITLE:	2.54间距 塑高5.0 单排母 90度 U型 塑宽2.6
Customer No.	